The Complete Häfele

Compact

Introduction

Dear Customer,

We are happy to present to you the very first edition of a fully exclusive product catalogue for our Distribution Channel. As you can see it comes in a handy format and is structured clearly so that you can find the fitting you are looking for easier and faster. You will find all the products across different categories in this new catalogue - the majority of which are available in our Logistics & Distribution Centres located in different parts of South Asia. These are attractive, hard wearing and reliable products which will perform their function well for many years to come - we guarantee it!

The Furniture and Hardware Industry has grown rapidly in the last few years in India. We at Häfele have understood the growing needs of the industry and have taken up the challenge to be the best suppliers of quality fittings and accessories, which are not only aesthetically beautiful but give our customers the functionality that they need.

Häfele India has grown beyond our wildest dreams with regional offices and design showrooms in all major metros in India. The company also has an established presence in Sri Lanka and Bangladesh by way of branch offices and Design Showrooms; and runs operations in other regions of South Asia like Bhutan, Nepal and Maldives. Our employee base has only multiplied in the last few years with a competent sales presence across South Asia. We will continue to grow our team in the coming years to provide better and more services to our customers.

So please enjoy this handy guide for quality hardware fittings and let us have any recommendations in regard to products which you want us to add or any other improvements you would like to see in the services we provide.

As always the HAFELE Team is looking forward to being at your service.

Warmest regards

Jürgen Wolf
Managing Director
Häfele South Asia

Hafele Reassuring Expertise

"For over 9 decades, we've been helping people make more of their homes.

Established in Germany, and now operating worldwide, we specialise in the fittings, hardware and systems that improve the way your home, works. So when you choose our products as part of your new or reformed home, you know you're getting the benefit of extensive knowledge and decades of experience.

And we're still a family business, owned and managed by family members who really care about the products and service we provide. You can rely on our commitment to the highest standards of quality and reliability, founded on a long tradition of German engineering where attention to detail is second nature.

All our home improvement ideas are built to last – day in, day out – we want you to get the very best from every corner of your home, for many years to come."

HÄFELE

Hafele Worldwide

With its origin in 1923 in a small town named 'Nagold' from the Swabian region of Germany that nurses a passion for hardware technology, it is no surprise that Häfele has lived up to its roots through a successful presence in the architectural and furniture hardware industry for over 9 decades now. Today, Hafele's worldwide penetration includes 38 subsidiaries across Europe, America, Asia, Australia and New Zealand. With these subsidiaries and numerous other sales organisations, Häfele operates in over 150 countries. The Häfele headquarters, 4 manufacturing units and 10 sales offices are located within Germany; while 1 manufacturing unit is located at Budapest, Hungary. The company also owns one of the largest and most sophisticated warehouses in its home country. The Häfele worldwide workforce is empowered by a base of over 8100 employees.

The group services over 150,000 customers across the globe through its extensive range of hardware products and a comprehensive logistics system. In addition to this, Häfele also provides consultative services to its customers, educating and advising them about buying the correct hardware as per their requirements. With this level of market penetration and ability to handle worldwide demand, it comes as no surprise that the company is an authority in the segment of home interior solutions; what is pleasantly surprising, though, is that in spite of its size, Häfele still remains a family owned and run business with a unique, friendly and value-centric work culture which is strongly followed among all its subsidiaries.

HÄFELE

About Hafele India

Häfele India is a wholly-owned subsidiary of the Häfele Global network and has been operating in India since 2003 under the leadership of Mr. Jürgen Wolf (Managing Director). The ability of the company to understand the diverse Indian market has made it an authority in the field of architectural hardware, furniture and kitchen fittings and accessories. The company also has a strong presence in synergized product categories namely Home Appliances, Furniture Lighting, Sanitary and Surfaces catering to the focused demand from these industries.

The subsidiary has a strong nation-wide presence with offices in Mumbai, Pune, Ahmedabad, Bangalore, Chennai, Hyderabad, Delhi, Kolkata and Cochin. It has full-scale operations in Sri Lanka and Bangladesh with Regional offices and Design Showrooms in both the countries; and has also spread its operations to other regions of South Asia including Nepal, Bhutan and Maldives.

Häfele's design showrooms are hubs of international home interior trends and cutting edge designs presented in a world-class environment, where customers can see home solutions in their inherent applications. These showrooms function as a one-stop-shop for all home interior and improvement needs - from providing in-depth technical advice to kitchen and wardrobe designing services through a team of experts stationed at the showroom.

Häfele India services its customers with a base of over 1300 employees, a well-networked Franchise base of over 130 shops along with over 1000 dealers situated across South Asia. The subsidiary has a sophisticated Logistics centre in Mumbai along with distribution centres in Delhi, Bangalore, Kolkata and Colombo respectively.

One Stop Shop

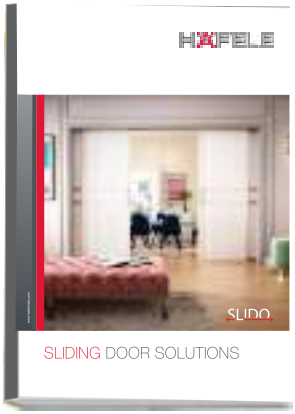

Amidst the chaotic yet fast growing hardware market; Häfele stands apart as a complete solution provider and not just a brand that sells hardware. We introduced related product segments like lighting, appliances, bathroom fittings and home surfaces to our customers so that they could get everything from one source and at their expected standards of quality and functionality. Today, these are established product verticals that are contributing to our Brand image of a “complete solution provider” by each passing day.

This proposition of being a “complete solution provider” is strongly backed by our service-oriented approach which includes anything from designing (in case of kitchens and wardrobes) to technical advice, hardware scheduling, training, warranties and most importantly after-sales support. This allows us to walk the length of the entire project duration by aiding and supporting our customers at every stage. We can execute the most abstract solutions in any interior space by integrating functionality with cutting-edge designs, ably backed by our unified service network to ensure continued support.

HÄFELE

CONTENTS

Architectural Hardware

PAGE

1-15

Furniture Fittings

PAGE

16-78

Sliding Fittings

PAGE

79-104

Kitchen Fittings

PAGE

105-125

Architectural Hardware

HÄFELE

Door Closer

PAGE 3

Lever Handles

PAGE 7

Pull Handles

PAGE 10

Hinges

PAGE 11

Mortise Locks

PAGE 12

Euro Profiles Cylinder

PAGE 14

Door Accessories

PAGE 15

Door Closer

HS 1100 Surface Mounted
EN 2 - 4 Door Closer

Technical Data :

- Adjustable Size : 2-4 for Doors with Width from 850mm to 100mm and Weight from 45kg to 80kg

Article No.	Description
931.84.749	HS 1100 with Standard Arm
931.84.759	HS 1100 with Hold-Open Arm

DCL-30 Concealed Door Closer

- Door Weight Max.: 80 kg.
- Door Width: 950-1100 mm
- Min. Door Thickness : 40 mm
- Closing Force EN 4
- Material and Finish: Aluminium
- Opening Angle Max.: 120°
- Hold Open Angle: 90°
- Adjustable Closing and Latching Speeds:
  - Closing Speed: 120° - 15°
  - Latching Speed: 15° - 0°
- Application: Wooden and Metal-framed doors
- Compatible: DIN Left and Right
- Installation: Door and Transom Mount
- Cycle Testing: 5,00,000 Cycles

Article No.	931.84.921

DCL 15 Surface Mounted
EN 2 - 4 Door Closer

CE Marked Fire tested

EN 1154:1996 + A1:2002

Technical Data :

- 500,000 Cycle Tested
- Closing Force complying with EN 1154 2 - 4
- Max. Door Leaf Width 1100mm
- Max. Door Opening Angle approx. 180°
- Max. Door Leaf Weight 80 kg
- **Finish:** Aluminium

Article No.	Description
931.84.629	With Standard Arm Assembly
931.84.639	With Hold-Open Arm

DIY78 Surface Mounted

CE Marked Fire tested

Technical Data

- 5,00,000 Cycle Tested
- Closing Force Complaint with EN 1154 2-4
- Max Door Leaf Width 1100mm
- Max Door Opening Angle - Approx. 180°
- Max Door Leaf Weight - 80kg
- **Finish:** Aluminium

Article No.	Description
499.30.002	With Standard Arm, Size 2/3/4, for up to 80 kg
499.30.003	With Hold Open Arm, Size 2/3/4, for up to 80 kg

Note for hold open device: The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available

HÄFELE

Door Closer

DCL 21 Surface Door Closer

Technical Data
- 5,00,000 Cycle Tested
- Closing Force EN 2-4
- Max Door Leaf Width 1100mm
- Max Door Opening Angle - Approx. 180°
- Max Door Leaf Weight - 80kg
- **Finish:** Aluminium

Article No.	Description
931.84.129	With Hold Open

DCL 35
CAM- Concealed Efficient / Standard Conceal Door Closer

CE Marked Fire tested

Features
- 10,00,000 Cycle Tested
- Closing Force Complying with EN 1154 2-4
- Min. Door Thickness: 40mm
- Max Door Leaf Width: 1100mm
- Max Door Opening Angle: 120°
- Weight: 80 kg
- **Finish:** Aluminum

Article No.	Description
931.46.069	DCL 35 with Standard Arm
931.46.239	DCL 35 with Hold-open Arm

Note for hold open device: The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order Stock Available

Door Closer

DCL 55
Surface Door Closer

- 5,00,000 Cycle Tested
- Size 2-6
- Door Weight: Max.120kg
- Door Width: Max.1400mm
- In Compliance with EN 1154:1996/a1:2002
- Max. Door Opening Angle Approx. 180°
- **Finish**: Aluminium

CE Marked Fire tested

Article No.	Description
931.84.769	DCL 55 with Standard Arm
931.84.819	DCL 55 with Hold-open Arm

DCL 71
CAM- Efficiency Concealed Closer

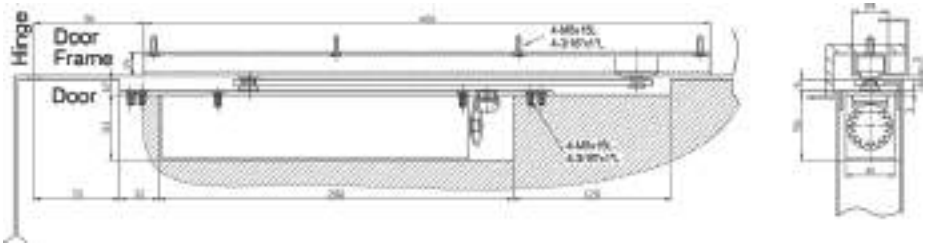

Technical Data & Features
- Closing Force: Adjustable EN 2-5
- Opening Application: Non-handed
- Standard Door Width: Up to 1250 mm
- Maximum Door Weight: Up to 120 kg
- Arm Type: Slide Track & Arm
- Closing Angle: 115°-15° (Adjustable by Valve)
- Latching Angle: 15°-0° (Adjustable by Valve)
- Maximum Door Opening Angle: Approx. 115°
- Door Dimensions: 286 (L) x 37 (W) x 62.5 (H) mm
- Min Door Thickness: 50 mm

Article No.	Description
931.84.469	Non Hold Open
931.84.409	With Hold Open

Note for hold open device: The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available

Door Closer

DCL 70
CAM- Efficiency Concealed Closer

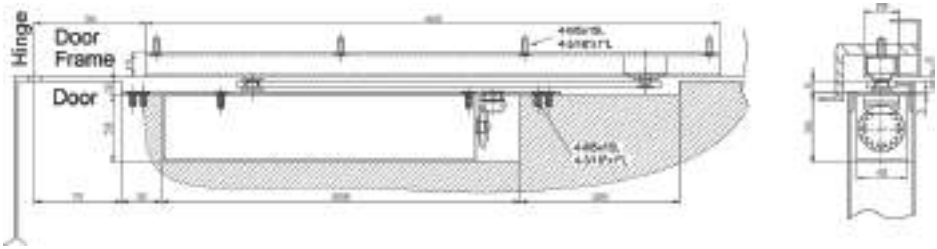

Technical Data & Features

- Closing Force: Adjustable EN 3-6
- Opening Application: Non-handed
- Standard Door Width: Up to 1400 mm
- Maximum Door Weight: Up to 150 kg
- Arm Type: Slide Track & Arm
- Closing Angle: 115°-15° (Adjustable by Valve)
- Latching Angle: 15°-0° (Adjustable by Valve)
- Maximum Door Opening Angle: Approx. 115°
- Door Dimensions: 275 (L) x 40 (W) x 54.5 (H) mm
- Min Door Thickness: 55 mm

Article No.	Description
931.84.399	Non Hold Open
931.84.389	With Hold Open

Note for hold open device: The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available

Hollow Lever Handles

Features
- Complies to EN 1906:2010 Grade 2
- Suitable for fire resistant & smoke control doors
- Door thickness 38 - 55 mm
- 100000 cycle tested

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.556	SS Matt

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.566	SS Matt

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.576	SS Matt

Lever Handle on Rose & Cylinder Escutcheon

Article No.	Finish
903.92.646	SS Matt

Special Order

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.586	SS Matt

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.596	SS Matt

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.606	SS Matt

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.616	SS Matt

Solid Lever Handles

Lever Handle on Rose & Cylinder Escutcheon

Fire tested

Article No.	Finish
903.92.686	SS Matt

Stock Available

Zinc Lever Handles

1 Years Surface
Finish Warranty
5 Years Operational Warranty

ALPHA

Lever Handle, on Rose and Escutcheons, Square

Article No.	Finish
901.79.843	Satin Nickel

GAMMA

Lever Handle, on Rose and Escutcheons, Square

Article No.	Finish
901.79.845	Satin Nickel

DELTA

Lever Handle, on Rose and Escutcheons, Square

Article No.	Finish
901.79.847	Satin Nickel

Special Order

ZETA

Lever Handle, on Rose and Escutcheons, Square

Article No.	Finish
901.79.851	Satin Nickel

BETA

Lever Handle, on Rose and Escutcheons, Round

Article No.	Finish
901.79.853	Satin Nickel

COMBO - VEGA

Vega Lever Handle Combiset with 8" Long, Backplate with 60 mm Tt Epc and 7" Mortise Lock, Thumbturn + Key

Article No.	Finish
901.79.579	Satin Nickel / Chrome Plating

AVIOR - ROSE HANDLE

Lever Handle with Rose and Escutcheons

Article No.	Finish
901.79.569	Satin Nickel
901.79.570	Antique Brass
901.79.571	Matt Black

VEGA - ROSE HANDLE

Lever Handle, on Rose and Escutcheons

Article No.	Finish
901.79.576	Satin Nickel / Chrome Plating
901.79.577	Chrome Plating / White
901.79.578	Chrome Plating / Black

Stock Available

Zinc Lever Handles

1 Year Surface
Finish Warranty
5 Year Operational Warranty

SPICA - ROSE HANDLE

Lever Handle with Rose and Escutcheons

Article No.	Finish
901.79.584	Satin Nickel
901.79.585	Antique Brass
901.79.586	Chrome Plating
901.79.587	Matt Black

Special Order

RIGEL - ROSE HANDLE

Lever Handle with Rose and Escutcheons

Article No.	Finish
901.79.581	Satin Nickel / Chrome Plating
901.79.582	Silver Plating / White
901.79.583	Chrome Plating / Black

ENIF - ROSE HANDLE

Lever Handle with Rose and Escutcheons

Article No.	Finish
901.79.588	Satin Nickel
901.79.589	Antique Brass
901.79.590	Chrome Plating
901.79.591	Matt Black

Stock Available

SS Pull Handles SS 304

SS Pull Handles

Pull Handle Back to Back Fixing
Application: For glass & wooden doors
Max. Door Thickness: 55 mm
Finish: SS Matt

Article No.	Size (mm)	Finish
903.11.470	25 Dia x 300 C/C x 325 O/A	SSM
903.11.471	25 Dia x 450 C/C x 475 O/A	SSM
903.11.472	25 Dia x 600 C/C x 625 O/A	SSM
903.11.480	25 Dia x 300 C/C x 325 O/A	SSM+SSP
903.11.481	25 Dia x 450 C/C x 475 O/A	SSM+SSP

SS Pull Handles

Pull Handle Back to Back Fixing, Drilling Hole 13mm Ø for glass doors.
Application: For glass & wooden doors
Max. Door Thickness: 55 mm
Finish: SS Matt

Article No.	Size (mm)	Finish
903.11.450	25 Dia x 220 C/C x 300 O/A	SSM
903.11.451	25 Dia x 305 C/C x 450 O/A	SSM
903.11.452	25 Dia x 450 C/C x 600 O/A	SSM
903.11.491	32 Dia x 305 C/C x 450 O/A	SSM
903.11.460	25 Dia x 220 C/C x 300 O/A	SSM+SSP
903.11.461	25 Dia x 305 C/C x 450 O/A	SSM+SSP
903.11.462	25 Dia x 450 C/C x 600 O/A	SSM+SSP

* Single side concealed fixing

Special Order

Stock Available

Hinges

Ball Bearing Butt Hinge

Features
- For Wooden Doors
- 2 High Performance Ball Bearings
- Suitable for DIN Left & DIN Right Hand

Technical Data
- Maximum Door Weight for 3 Hinges: 120 kg
- Knuckle Diameter 14mm
- Finish: SS Matt

Article No.	Sizes of Hinges	Timber Door	Metal Door	Square Corner
926.20.810	4"x3"x3 mm	•		•
926.32.110	3"x2.5"x2.5 mm	•		•
926.32.160	4"x3"x3 mm	•		•
926.32.280	5"x3"x3 mm	•		•
926.32.290	5"x3.5"x3 mm	•		•
926.20.811	5"x 3"x3 mm		•	•

Special Order

Stock Available

Mortise Locks

Mortise Cylinder Lock, 55mm Backset, 24mm Forend, 72mm Centre to Centre

- Heavy Duty Springing
- Anti Corrosive Plating
- Double Throw Deadbolt
- Case Size: 84 x 165mm
- Stainless Steel Dead Bolt & Latch

Article No.	Finish
911.02.124	SS Matt

Mortise Cylinder Deadlock, 55mm Backset, 24mm Forend

- Anti Corrosive Plating
- Case Size: 84 x 95mm
- Stainless Steel Dead Bolt

Article No.	Finish
911.22.551	SS Matt

Special Order

Mortise Cylinder Lock, 24mm Forend, 85mm Centre to Centre

Fire tested

- Heavy Duty Springing
- Anti Corrosive Plating
- Double Throw Deadbolt
- Case Size:
  74 x 170mm for 45mm BS
  89 x 170mm for 60mm BS
- Stainless Steel Dead Bolt & Latch

Article No.	Finish	Backset
911.02.165	SS Matt	45mm
911.02.161	SS Matt	60mm

Sliding Mortise Locks

Feature

- For Wooden Doors
- Prepared for Profile Cylinder
- With Hook Bolt
- Backset 50mm

Article No.	Finish
911.26.096	Nickel Plated

Economic Series

Mortise Locks

- For Flush Timber Doors
- Latch Operated with Lever Handle or Key Action
- Stainless Steel Forend
- Deadbolt 1-turn
- Reversible latch

Technical data

- Lever follower:-8mm, Split Spindle

Article No.	C to C	Backset
911.02.783	72 mm	55mm
911.25.381	85 mm	60mm
Multi Bolt		
911.56.181	85 mm	60mm

Stock Available

Knob Lockset

Knob Lockset for Entrance and Office Doors
Outside: Key Knob with Cylinder
Inside: Knob with Push Button

Inside and Outside
Knobs - SS 304

Strike Plate - SS
Forend - SS
Latch - Zinc Alloy with
Stainless Steel Plating
For flush Timber or steel doors
Suitable for door
thickness 30 - 45 mm
Brass cylinder with 5 pin tumblers

Technical Data
Backset - 60 mm
Rosette Diameter - 75mm

Entrance Function -
One Key and One Button

Privacy Function -
Button and Coin Turn

Article No.	Discription
911.83.680	Entrance Function
911.83.681	Privacy Function

Special Order

Rim Latch Locks

Secure Vertibolt Lock with Dimple Key, 5 Keys

Article No.	Door Thickness (mm)	Finish
911.58.250	30-85	Satin
911.58.251	30-85	Antique Brass

Hale Safety Latch Lock with Regular Key, 3 Keys

Article No.	Door Thickness (mm)	Finish
911.58.254*	30-85	Satin
911.58.255*	30-85	Antique Brass
911.58.245#	30-85	Satin
911.58.246#	30-85	Antique Brass

* Inside Opening # Outside Opening

Gallant Premium Night Latch Lock with Dimple Key, 5 Keys

Article No.	Door Thickness (mm)	Finish
911.58.262	30-85	Satin
911.58.263	30-85	Antique Brass

Vigor Night Latch Lock with Knob on Inside with Regular Key, 3 Keys

Article No.	Door Thickness (mm)	Finish
911.58.266	30-85	Satin
911.58.267	30-85	Antique Brass

Vigor Night Latch Lock with Knob on Inside with Dimple Key, 5 Keys

Article No.	Door Thickness (mm)	Finish
911.58.258	30-85	Satin
911.58.259	30-85	Antique Brass

Stock Available

Euro Profile Cylinders

Euro Profile Double Cylinder, Keyed Different

• Master keyed Cylinder are available on request

Article No.	Finish	Size (mm)
916.96.006	Nickel Matt	63
916.96.016	Nickel Matt	71
916.96.026	Nickel Matt	80
916.96.036	Nickel Matt	90
916.96.046	Nickel Matt	100

Euro Profile Single Cylinder, Keyed Different (Key One Side)

• Master keyed Cylinder are available on request

Article No.	Finish	Size (mm)
916.96.106	Nickel Matt	40
916.96.116	Nickel Matt	45
916.96.126	Nickel Matt	50
916.96.136	Nickel Matt	55
916.96.146	Nickel Matt	60

Special Order

Euro Profile Single Cylinder with Thumb Turn (No Key)

Article No.	Finish	Size (mm)
916.96.206	Nickel Matt	40
916.96.216	Nickel Matt	45
916.96.226	Nickel Matt	50
916.96.236	Nickel Matt	55
916.96.246	Nickel Matt	60

Euro Profile Thumb Turn Cylinders, Keyed Different (Key Outside + Thumb Turn Inside)

● Master keyed Cylinder are available on request

Article No.	Finish	Size (mm)
916.96.306	Nickel Matt	60
916.96.316	Nickel Matt	71
916.96.326	Nickel Matt	80
916.96.336	Nickel Matt	90
916.96.346	Nickel Matt	100

Euro Profile Toilet Cylinder (No Key) Thumb Turn Inside + Emergency Release Outside)

Article No.	Finish	Size (mm)
916.96.406	Nickel Matt	60
916.96.416	Nickel Matt	71
916.96.426	Nickel Matt	80
916.96.436	Nickel Matt	90
916.96.446	Nickel Matt	100

Stock Available

Door Accessories

Wall Mounted Door Stopper
SS 304

Article No.	Finish
937.13.530	SS Matt

Door Viewer

Article No.	Finish
959.00.027	Satin Nickel (160°)
959.00.040	Satin Nickel (180°)
959.00.090	Satin Nickel (200°)

Special Order

Stock Available

Door Accessories

Kanone Brass Tower Bolts

Antique Brass

Satin Nickel

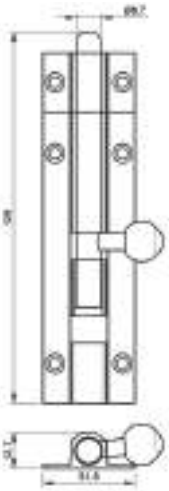

Specifications:
- Body: Brass
- Rod: Brass rod with a solid knob and a rod keeper
- Finish options: Antique Brass, Satin Nickel
- Size Options: 4", 6", 8", 10" & 12"
- Rod Diameter: 8.7 mm

Article No.	Size (Inches)	Finish
911.81.573	4"	Satin Nickel
911.81.575	4"	Antique Brass
911.81.576	6"	Satin Nickel
911.81.578	6"	Antique Brass
911.81.579	8"	Satin Nickel
911.81.581	8"	Antique Brass
911.81.582	10"	Satin Nickel
911.81.584	10"	Antique Brass
911.81.585	12"	Satin Nickel
911.81.587	12"	Antique Brass

Special Order

Stock Available

Window Friction Hinges

Standard Top Hung and Side Hung

Top Hung

Side Hung

Features:

- Manufacture from high grade austenitic SS304
- Composite Steel/Plastic slider for strength
- Durability and smooth operation
- Mainly used for light top projecting style domestic windows

● Top Hung Windows

Article No.	Size	A mm	B mm	C mm	Dmm/ Stack height	Max. width	Max. height	Max. weight	Open. Angle
972.05.001	203mm (8")	203	16	18	14	1200	350	11kg	60°
972.05.002	255mm (10")	255	16	18	14	1200	400	16kg	84°
972.05.003	305mm (12")	305	16	18	14.5	1200	550	18kg	85°
972.05.004	356mm (14")	356	16	18	15.5	1200	650	20kg	87°
972.05.015	406mm (16")	406	19	22	16	1200	750	40kg	87°
972.05.017	509mm (20")	509	19	22	16	1200	1000	45kg	42°
972.05.019	609mm (24")	609	19	22	16	1200	1200	50kg	45°

●Side Hung Windows

Article No.	Size	A mm	B mm	C mm	Dmm/ Stack height	Max. width	Max. height	Max. weight	Open. Angle
972.05.003	305mm (12")	305	16	18	14.5	600	1200	18kg	85°
972.05.004	356mm (14")	356	16	18	15.5	650	1200	20kg	87°
972.05.015	406mm (16")	406	19	22	16	700	1200	40kg	87°

Special Order

Stock Available

Furniture Fittings

Furniture Handles

PAGE 18

Connectors

PAGE 24

Hinges

PAGE 32

Locks

PAGE 58

Bed Fitting

PAGE 69

Dining Mechanism

PAGE 70

Drawer Runner

PAGE 71

Table & Desk Fittings

PAGE 74

Glass Fittings

PAGE 77

Furniture Handles: Stainless Steel Matt

8 mm Round Bar Handle

Article No.	C to C
116.10.051	96 mm
116.10.052	128 mm
116.10.053	160 mm
116.10.055	224 mm
116.10.058	320 mm

10 mm Round Bar Handle

Article No.	C to C
117.40.051	96 mm
117.40.052	128 mm
117.40.053	160 mm
117.40.055	224 mm

10 mm Round Bar Handle

Article No.	C to C
115.77.051	96 mm
115.77.052	128 mm
115.77.053	160 mm
115.77.055	224 mm
115.77.058	320 mm

Special Order

10 mm Square x 10 mm Round Handle

Article No.	C to C
100.54.001	96 mm
100.54.002	128 mm
100.54.003	160 mm
100.54.005	224 mm
100.54.008	320 mm

10 mm Round x 10 mm Square Handle

Article No.	C to C
115.95.001	96 mm
115.95.002	128 mm
115.95.003	160 mm
115.95.005	224 mm
115.95.008	320 mm

10 x 10 mm Square Handle

Article No.	C to C
115.39.001	96 mm
115.39.002	128 mm
115.39.003	160 mm
115.39.005	224 mm
115.39.008	320 mm

12 x 12 mm Square Handle & 6mm thickness

Article No.	C to C
100.68.001	96 mm
100.68.002	128 mm
100.68.003	160 mm
100.68.005	224 mm
100.68.008	320 mm

Stock Available

Furniture Handles: Stainless Steel Matt

10 mm Round Bow Handle

Article No.	C to C
100.69.001	96 mm
100.69.002	128 mm
100.69.003	160 mm
100.69.005	224 mm

10 x 10 mm Bow Handle

Article No.	C to C
100.55.001	96 mm
100.55.002	128 mm
100.55.003	160 mm
100.55.005	224 mm
100.55.008	320 mm

10 mm Round Rail Bar Handle

Article No.	C to C
101.20.071	96 mm
101.20.072	128 mm
101.20.073	160 mm
101.20.075	224 mm
101.20.078	320 mm

8 mm Round x 12 mm Square Pull Handle

Article No.	C to C
100.67.006	256 mm

10 x 10 mm Furniture Handle Height : 24mm

Article No.	C to C
115.68.002	128mm
115.68.004	192mm
115.68.008	320mm
115.68.014	640mm

25 x 12 mm Furniture Handle Height : 40mm

Article No.	C to C
115.46.002	128mm
115.46.004	192mm
115.46.008	320mm
115.46.014	640mm

Dia 14 Mm, Stainless Steel Matt Hollow Bar Handle,

Article No.	C to C
109.85.034	96mm
109.85.036	160mm
109.85.038	224mm
109.85.039	320mm

Special Order

Stock Available

Inset Handles

Finish: Silver Anodized



Article No.	Length
126.20.905	2500 mm

Finish: Silver Anodized



Article No.	Length
126.21.902	2500 mm

Finish: Silver Anodized

A= 43mm
B= 20mm
C=1.6mm

Article No.	Length
126.14.901	2500 mm

Special Order

Inset Handles



Finish: Silver Anodized

Article No.	Length
126.07.933	3000 mm

Finish: Stainless Steel Hairline

Article No.	Length
126.07.033	3000 mm

Finish: Silver Anodized

Article No.	Length
126.22.900	3000 mm

Flush Handle

Finish: Silver Anodized



Article No.	Length
126.51.910	3000 mm

Profile Handle for Wood Sliding Door

Material : Aluminium

Finish : Silver anodized

Article No.	Length
126.12.900	2500 mm

Stock Available

Gola Profile Handles

Finish: Silver Anodized



Article No.	Length
126.35.945	2500 mm

Finish: Silver Anodized

Article No.	Length
126.39.925	2500 mm

Finish: Silver Anodized
End Cap For 126.39.925
Plastic Silver Coloured



Article No.	
126.39.997	RHS
126.39.998	LHS

Special Order

Grip Profile Handle
Material: Aliminium Anodized



Article No.	Length
126.34.925	2500 mm

Grip Profile Handle
Material: Aliminium Anodized



Article No.	Length
126.35.925	2500 mm

Grip Profile Handle
Material: Aliminium Anodized



Article No.	Length
126.15.901	2500 mm

Stock Available

Gola Profile Handles



Length : 3000 mm

Article No.	Finish
126.07.903	Silver Anodized
126.07.003	Stainless Steel Hairline

Special Order



Length : 3000 mm

Article No.	Finish
126.07.013	Stainless Steel Hairline



Length : 3000 mm

Article No.	Finish
126.07.923	Silver Anodized
126.07.023	Stainless Steel Hairline

Stock Available

Gola Profile Handles

Finish: Silver Anodized

Article No.	Length
126.37.900	2500 mm

Finish: White Coloured

Article No.	Length
126.37.700	2500 mm

Finish: Black Coloured

Article No.	Length
126.37.300	2500 mm

Special Order

Cover Cap For L Shape Gola Profile

RHS Cap

Article No.	Finish
126.37.997	Silver Coloured
126.37.977	White Coloured
126.37.937	Black Coloured

LHS Cap

Article No.	Finish
126.37.998	Silver Coloured
126.37.978	White Coloured
126.37.938	Black Coloured

Finish: Silver Coloured

Article No.	Length
126.36.900	2500 mm

Finish: White Coloured

Article No.	Length
126.36.700	2500 mm

Finish: Black Coloured

Article No.	Length
126.36.300	2500 mm

Cover Cap For C Shape Gola Profile

Article No.	Finish
126.37.996	Silver Coloured
126.37.976	White Coloured
126.37.936	Black Coloured

Fixing Bracket For Gola Profile

Article No.	Finish
126.37.990	Stainless Steel Matt

Fixing Bracket For Celling

Article No.	Finish
126.37.988	Stainless Steel Matt

Stock Available

Minifix Connectors

Minifix 15
Connector Housing for wood thickness from 12 to 23mm
Finish: Zinc Alloy,

Article No.	Finish
262.26.070	15 dia/ wood 12mm Zinc Bright
262.26.532	15 dia/ wood 15 mm Nickel Plated
262.26.534	15 dia/ wood18 mm Nickel Plated
262.26.036	15 dia / wood 23 mm Zinc Bright

Econo S Bolt

Steel Galvanized with clip-on plastic sleeve, 5 mm Euro thread. Thread length 11mm.
Sleeve-Polystyrene Red.

Article No.	Drilling distance
262.27.679	24 mm
262.28.679	34 mm

Minifix Connectors

Econo Bolt- Machine Thread
Steel Galvanized 5 mm machine thread. Thread length 11mm.

Article No.	Drilling distance
262.28.643	34 mm

Econo Bolt-Machine Thread (Steel Galvanized M6x9 mm)

Article No.	Drilling distance
262.28.319	34 mm

Econo Bolt - Euro Thread
Steel Galvanized 5 mm Euro thread. Thread length 11mm.

Article No.	Drilling distance
262.28.624	34 mm

Cover Cap

Dowel: Nylon Socket for Machine Thread Econo Bolts

Article No.	Dia. x Length
039.33.268	10.8 x 11.5mm

Dowel: Nylon Socket for Econo S Bolts and Euro threaded Bolts

Article No.	Dia. x Length
039.32.050	10 x 12 mm

Glue-in Dowel: Plastic socket for M6 threaded bolt

Article No.	Dia. x Length
039.33.462	8 mm x 11 mm
039.33.266	10 mm x 11 mm

Cover Cap for Minifix 15 housing, for **Thickness** from 13 to 29 mm
Diameter: 17 mm
Material: Plastic

For wood thickness 16 - 29 mm

Article No.	Colour
262.24.751	White for 16mm - 29mm

Cover cap, Plastic, self-adhesive, Ø 18 mm

Article No.	Colour
245.25.500	Light grey
245.25.310	Beech

Special Order

Stock Available

Minifix Connectors

Ordering Information

	Article No.	2 Piece Connector	3 Piece Connector	4 Piece Connector
	Minifix casing			
	262.26.070	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.26.532			
	262.26.534			
	262.26.264			
	Connecting Bolt			
	262.28.679	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.27.679			
	262.28.624			
	Dowel			
	039.32.050		1 no.	as per requirement
	Cover Cap			
	262.24.064	—	—	1 no. as per requirement
	262.24.055			
	262.24.751			
	262.24.153			

Ordering Information

	Article No.	2 Piece Connector	3 Piece Connector	4 Piece Connector
	Minifix casing			
	262.26.070	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.26.532			
	262.26.534			
	262.26.264			
	Machine Thread Connecting Bolt			
	262.28.643	1 no.	1 no.	as per requirement
	262.28.319	1 no.	1 no.	as per requirement
	Dowel			
	039.33.268	—	1 no.	as per requirement
	Cover Cap			
	262.24.064	—	—	1 no. as per requirement
	262.24.055			
	262.24.751			
	262.24.153			

Special Order

Stock Available

Spreading Sleeve

Minifix Spreading sleeve
Strip of Sleeves
For drilled hole Ø 5 mm
Material : Nylon



Article No.	Length
042.98.051	12 mm

Dowel: Made of white birch wood

Article No.	Dia. & Length
267.89.854	8 x 40 mm

Minifix sleeve
M6 glue-in Sleeves
For drilled hole Ø 10 mm
Material : Nylon



Article No.	Length
039.35.064	13 mm

Special Order

Rafix Connectors

Rafix - SE Connecting Bolts
Steel with Special threading (EURO)
for Drilled hole Ø 5 mm
Thread length 12 mm
Drive: Cross slot Pz2

Article No.	Finish
263.20.981	Galvanished

Rafix Connectors

Rafix - SE 32: Connector housing
Finish: Plastic

For wood thickness 19 mm

Article No.	Colour
263.12.105	Brown

Stock Available

Panel Connectors

KEKU - Suspension Fittings Screw Fixing Type
Area of application:
For fastening panels to frame structures
Material: Plastic
Colour: Black

EH - Frame component
For screw-fixing to substructures
Installation: With Ø 4 mm chipboard screws or VARIANTA Ø 3 mm or 5 mm special screws

Article No.	For Installation with
262.49.365	Chipboard screws with countersunk head 4.0 mm

Panel component
Installation:
For screw-fixing to panels with Ø 4 mm chipboard screws or VARIANTA Ø 3 mm or 5 mm special screws

With lip

Article No.	For Installation with
262.49.356	Chipboard screws with countersunk head 4.0 mm

KEKU - Push-in fittings
Area of application:
For fastening panels to frame structures
Material: Plastic
Colour: Black

AS - Frame component
For screw-fixing to substructures
Installation: With Ø 4 mm chipboard screws or VARIANTA Ø 3 mm or 5 mm special screws

Article No.	For Installation with
262.50.368	Chipboard screws with countersunk head 4.0 mm

AS - Panel component
Installation: With Ø 4 mm chipboard screws or VARIANTA Ø 3 mm or 5 mm special screws

Article No.	For Installation with
262.50.359	Chipboard screws with countersunk head 4.0 mm

Special Order

Stock Available

IXCONNET Spreading connector

Ixconnect SC 8/25

One piece cabinet connector for small furniture items & drawers

For concealed, not removable cabinet connections

Used in MDF and chipboard in combination with wooden dowel with recommended thickness from 15-19mm



Article No.	For Installation with
262.11.111	RTA Connector, Ixconnect SC 8/25, plastic

Ixconnect SC 8/60

One piece cabinet connector for large furniture items Used in MDF and chipboard in combination with wooden dowel with recommended thickness from 15-19mm

For concealed applications, only a Ø 6 mm drill hole for securing the connector is visible after installation



Article No.	For Installation with
262.11.117	RTA Connector, Ixconnect SC 8/60, plastic

Special Order

Stock Available

Bed Connectors

Bed Connectors: For beds with central tie bar/assembly de-mountable type.
Material: Steel
Installation: For screw-fixing

Supplied with (per unit)
1 supporting bracket
1 retaining plate

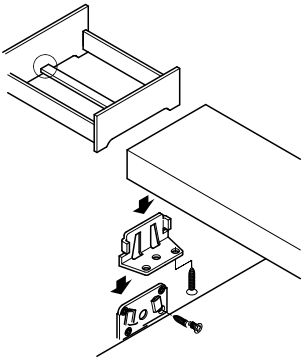

Article No.	Finish
273.03.515	Yellow chromatized

Special Order

Bed brackets: Steel
With 2 slots
Installation: For screw-fixing

Article No.	Finish
558.12.943	Nickel plated

Bed Connectors
With cranked hook-in part
Material: Steel
Installation: For screw-fixing

For Height: 100 mm

Article No.	Finish
271.03.511	Yellow chromatized
271.03.910	Chromatized

For Height: 130 mm

Article No.	Finish
271.03.531	Yellow chromatized
271.03.930	Chromatized



Stock Available

Bed Connectors

Bed fitting: With height adjustment feature
Material: Steel
Height adjustment: 4 attachment positions, triple height adjustment facility
Installation: For screw-fixing

Supplied with (per unit)
1 mounting plate
1 bracket

Article No.	Finish
273.41.550	Yellow chromatized

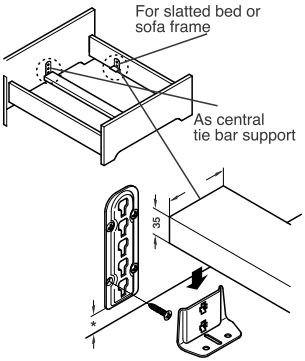

Bed Plinth Connector
For single and double beds
Material: Steel
Finish: Galvanised
Mounting: For right and left hand use
Installation: For screw-fixing

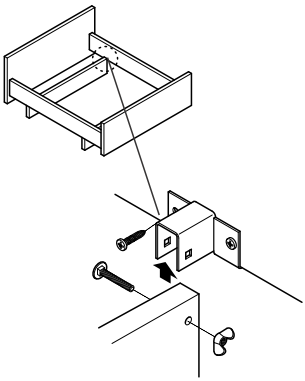

Article No.	Plinth thickness
273.07.937	19 mm
273.07.946	23 mm

Special Order

Stock Available

Connecting Screws

M4 Threaded Screw
With Combi slot for PZ 2 cross slot or flat blade screwdrivers
Material: Steel nickel plated



Article No.	Length
022.34.157	15 mm
022.34.255	25 mm
022.34.308	30 mm

Sleeve with M4 Internal Thread
With combi slot or flat blade screwdrivers
Finish: Steel, Nickel Plated



Article No.	L	Wood Thickness
267.01.715	27	28 mm - 36 mm
267.01.717	35	37 mm - 45 mm

Confirmat One-piece connector
With shank Ø 7
Head Ø 10 mm
Thread length 50 mm



Article No.	Finish
264.42.190	Steel Galvanised

Trim Cap: For Confirmat One-piece connector
Material: Plastic
Installation: Push fit



Article No.	Finish
045.01.704	White
045.01.008	Pine

Made of nickel-plated or black steel, with M6 thread
Connecting screw with sleeve
Drive: Cross slot PZ and longitudinal slot



Article No.	Length
267.05.703	36 mm - 46 mm

Special Order

Stock Available

Technical Information for Hinges

Drilling and fixing pattern



Cup for screw fixing:
Preferably with countersunk chipboard screws



Mounting plate for screw fixing: Preferably with countersunk chipboard screws or with pre-mounted special screws into 32 mm series drilled holes



Drilling pattern
Metallamat A series follow the drilling pattern of 48 x 6

Special Order

Stock Available

Technical Information for Hinges

Fixing door to carcase



Metallamat A series hinges are fitted onto the fixed mounting plate by sliding on

Adjustment options



Metallamat A hinges have 3 dimensional adjusting facility

A. Lateral adjustment:
Adjusting distance on concerned hinge +3 mm

B.Height adjustment:
This is done via the mounting plate adjusting distance +/- 2 mm

C. Depth adjustment:
Adjusting distance on concerned hinge +4 mm, -1 mm

Special Order

Stock Available

Technical Information for Hinges

Mounting pattern of hinges



Mounting methods: Generally there are 3 types of mounting



Full overlay mounting:
Recommended for Flush Doors



Half overlay mounting:
Recommended for Rebated Doors



Inset overlay mounting

Special Order

Technical Information for Hinges

Choice of mounting plate



Example: With door overlay of 10 mm and a distance to the cup of 3 mm, a mounting plate with distance 6 mm has to be choosen.

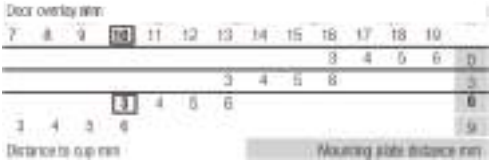

Determination of required minimum gap for half overlay



The required minimum gap depends on the type of hinge, distance to cup and door thickness. After the dimensions of distance to cup and door thickness has been determined, the minimum gap can be looked up in the application table.

Example: With a door thickness of 19 mm and a distance to cup of 4 mm a minimum gap of 2 mm is required.

Door thickness mm	Distance to cup mm			
	3	4	5	6
16	1.2	1.2	1.1	1.1
18	1.7	1.7	1.6	1.6
19	2.0	2.0	1.9	1.8
20	2.4	2.3	2.2	2.2
22	3.3	3.1	3.0	2.9
24	4.5	4.2	4.0	3.9
26– 32	Trial hanging is recommended			

Stock Available

Technical Information for Hinges

Recommendation with regard to the number of concealed hinges to be used per door panel: The number of concealed hinges per door depend on
a) door width
b) door height
c) door weight (kg.) &
d) door material (type of wood used).
Example: 3 concealed hinges have to be mounted on a door panel with a height of 1500 mm and a door weight of 9-12 kg, keeping in mind the door width of 500 mm.
Should the width increase then the number of hinges to be used will be 4 pieces.

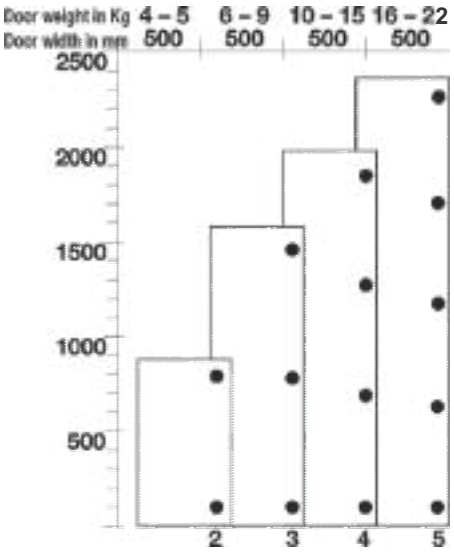

The number of concealed hinges shown in the diagram is just a recommendation though a fitting test is required.

Technical Information for Hinges

Recommendation for normal furniture hinges like the BUTT and ROLLED hinges per door panel: This depends on
a) door width
b) door height
c) door weight (kg.)
d) Door material (type of wood used)
Example: 2 furniture hinges have to be mounted on a door panel with a height of 900 mm and a door width of 600 mm considering a thickness of 19 mm

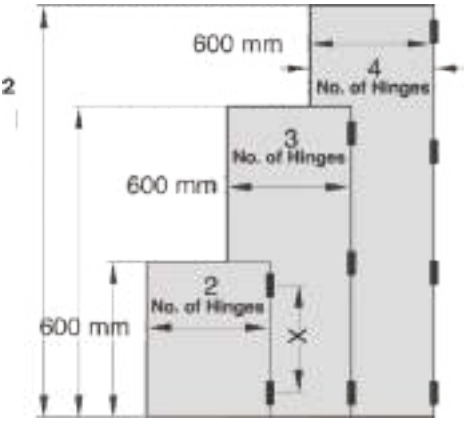

Eg. Two furniture hinges are recommended for a door height of 900 mm

The number of furniture hinges shown in the diagram is just a recommendation though a fitting test is required.

Special Order

Stock Available

Eco Metalla Hinge

Slide-on Mounting
Material: Steel
Finish: Nickel Plated
Passed 24 Hours Salt Spray Test
Cycle Testing: Passed 20,000 Cycles
3-Dimensional Adjustment
Opening Angle: 1100
Thickness of Hinge Arm: 11.3 mm
Diameter of Hinge cup: 35 mm
Door Thickness: 14-22 mm
4 hole mounting plate

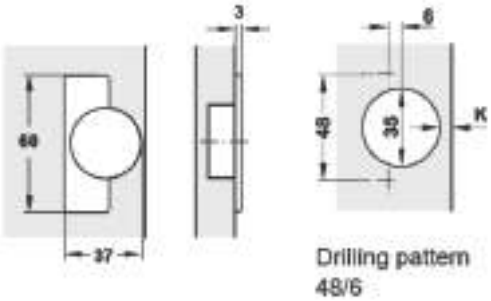

Drilling pattern
48/6

Finish: SS Polished

Article No.	Overlay
483.01.745	Full Overlay With 4 Hole Mounting Plate, Steel Nickel Plated
483.01.746	Half Overlay With 4 Hole Mounting Plate, Steel Nickel Plated
483.01.747	Inset With 4 Hole Mounting Plate, Steel Nickel Plated

Note: Article consists of 2 Hinges+2 Mounting Plates+ 12 fixing screws

Special Order

Stock Available

Metalla (Economical Range)

Metalla Concealed Hinges

Opening Angle 110°

Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility.
Door thickness: 14 - 22mm
Finish: Nickel Plate
Material: Steel

Cup dimensions



Drilling dimensions for cup fixing Screw fixing



Full overlay mounting

110° full overlay hinges with 0 mm mounting plate 2pcs each & screws 8 pcs.

Mounting plate distance



Article No.	Mounting
311.90.980	0 CRANK

Half overlay mounting

110° half overlay hinges with 0 mm mounting plate 2pcs each & screws 8 pcs.

Mounting plate distance



Article No.	Mounting
311.90.981	7 CRANK

Inset mounting

110° inset overlay hinges with 0 mm mounting plate 2pcs each & screws 8 pcs.

Mounting plate distance



Article No.	Mounting
311.90.982	16 CRANK

Note: Above hinges are set packed (2 pieces per packet) along with fixing screws for the pair of hinges.

Note: Not suitable for undersink application

Special Order

Stock Available

Metalla Concealed Hinges

Opening Angle 110°

Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility.
Door thickness: 14 - 22mm
Finish: Nickel Plate
Material: Steel
Mounting Plate: 4 holes

Cup dimensions



Drilling dimensions for cup fixing Screw fixing



Full overlay mounting

110° full overlay hinges with (4 holes) 0 mm mounting plate 1 pc each

Mounting plate distance



Article No.	Mounting
311.01.121	0 CRANK

Note: Not suitable for undersink application

(Please use nickel plated screws to avoid rusting)

Note: Screws are not part of BOM article.

Half overlay mounting

110° half overlay hinges with (4 holes) 0 mm mounting plate 1 pc each

Mounting plate distance



Article No.	Mounting
311.01.122	7 CRANK

Inset mounting

110° Inset hinges with (4 holes) 0 mm mounting plate 1 pc each

Mounting plate distance



Article No.	Mounting
311.01.123	16 CRANK

Note: We dont provide screws with these Articles

Special Order

Stock Available

Metalla (Economical Range)

Metalla Clip-on

Clip-on Metalla

Product Features:

- Mounting Plate with 4 holes for extra stability Clip-on Mounting
- Material: Steel
- Finish: Nickel Plated
- Passed 48 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 110°
- Thickness of Hinge Arm: 11.3 mm
- Door Thickness: 14-24 mm
- Drilling Pattern: A= 48 mm & B = 6 mm

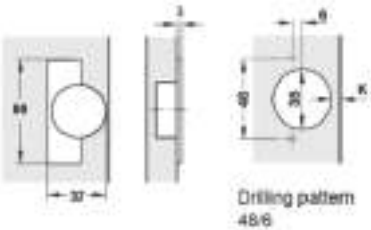

Drilling pattern 48/6



Article No.	Mounting
311.01.146	0 Crank 4 Hole MP
311.01.145	Half Crank 4 Hole MP
311.01.144	Inset 4 Hole MP

Note: Article consists of 2 hinges + 2 mounting plates + 12 screws

Special Order

Stock Available

Metalla Slide on

Slide-on Soft Close Hinge

Product Features:

- Slide-on Mounting
- Material: Steel
- Finish: Nickel Plated
- Passed 48 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 105°
- Thickness of Hinge Arm: 11.3 mm
- Diameter of Hinge cup: 35 mm
- Door Thickness: 14-24 mm
- Drilling Pattern: 48/6 mm

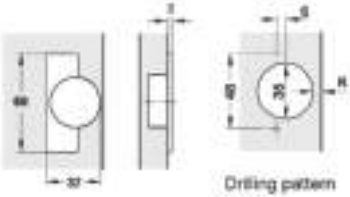

Drilling pattern
48/6

Article No.	Mounting
315.07.037	0 Crank 4 Hole MP
315.07.038	Half Crank 4 Hole MP
315.07.039	Inset 4 Hole MP

Note: Article consists of 2 hinges + 2 mounting plates + 12 screws

Special Order

Stock Available

Metalla (Soft Close Hinge)

Soft Closing - Damper Hinge

Features:
- Soft Close integrated into hinge arm
- Clip-on Mounting
- Material : Steel
- Finish : Nickel Plated
- Passed 48 hour salt test
- Material certified according to TUV Germany
- Cycle testing - Passed 40,000 cycles
- 3 Dimensional adjustment facility

Technical Information:
- Opening Angle : 110°
- Thickness of Hinge cup : 11.3 mm
- Diameter of Hinge cup : 35 mm
- Door Thickness : 14 - 24 mm

Full overlay mounting



Full overlay, Crank = 0

Article No.	Mounting
315.07.075	Full Overlay Mounting

Special Order

Half Overlay Mounting



Half overlay, Crank = 7

Article No.	Mounting
315.07.076	Half Overlay Mounting

Inset Mounting



Insert, Crank = 16

Article No.	Mounting
315.07.077	Insert Overlay Mounting

Note: Article consists of 2 Hinges+2 Mounting Plates+ 8 fixing screws

Stock Available

Thick Door Metalla Soft Close Hinge

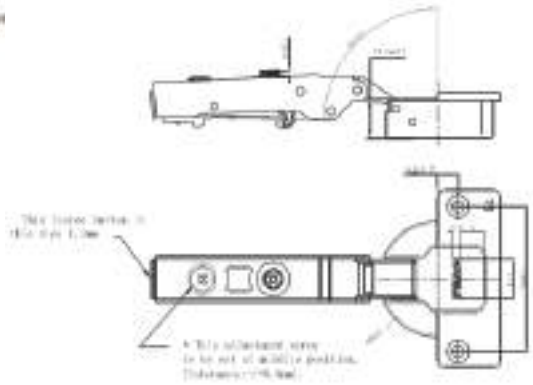

Specifications:
- Material: Steel
- Finish: Nickel Plated
- Anti Corrosion testing: Cleared 48 hours of salt testing
- Material Certification: TUV Certified
- Cycle Testing: Passed 40,000 Cycle test
- Opening Angle 95°
- Thickness of Hinge Cup 14.2 mm
- Diameter of Hinge Cup 40 mm
- Door Thickness 18-40 mm
- Drilling Pattern 52/7.5 mm

Finish: SS Polished

Article No.	Overlay
315.07.072	Thick door Metalla Soft Close hinge, Full Overlay, 40mm door thickness
315.07.073	Thick door Metalla Soft Close hinge, Half Overlay, 40mm door thickness
315.07.074	Thick door Metalla Soft Close hinge, Inset, 30 mm door thickness

Note: 1 set will consist of 1 hinge+1 mounting plate+4 fixing screws+ 1 hinge cup cap+1 hinge arm cap

Special Order

Stock Available

Metalla (Stainless Steel Soft Close Hinge)

Soft Closing Damper Hinge

Soft Close Integrated into Hinge arm
- Clip-on Mounting
- Material: Stainless Steel 304 (body)
- Finish: SS Polished
- Passed 96 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 104°
- Thickness of Hinge Arm: 11.3 mm
- Diameter of Hinge cup: 35 mm
- Door Thickness: 14-22 mm
- Drilling pattern: 48x6 mm

Product Application:
- Kitchen Under Sink Cabinets
- Coastal Areas

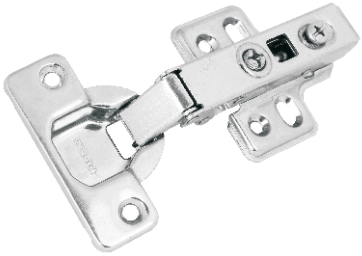

Finish: SS Polished

Article No.	Overlay
311.01.652	Full Overlay
311.01.653	Half Overlay
311.01.654	Inset Overlay

3 Dimensional Adjustment

Side adjustment: -3mm

Height adjustment: +/-2mm

Depth adjustment: +3/-1mm

Note: Article consists of 2 hinges + 2 mounting plates + 12 screws

Stock Available

Pie Cut Hinge

Specification:
Material: Cup-Steel, Hinge Arm & Mounting Plate- Zinc Alloy
Finish: Nickel Plated
Drilling pattern: 45/9.5 mm
Hinge cup dia: 35 mm
Drilling depth for cup: 11 mm
Door thickness: 14-24 mm
Opening angle: 135°
Partial opening angle: 65°
Full opening angle: 135°

Cup dimension and drilling pattern for cup fixing

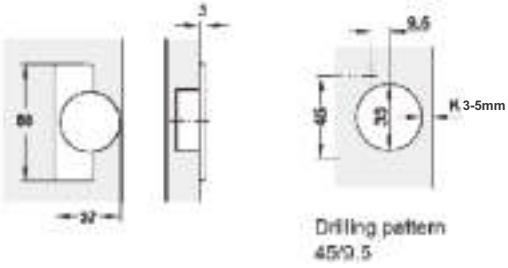

Finish: SS Polished

Article No.	Overlay
311.01.561	PIE CUT CORNER HINGE 135 DEGREE 48/6 MM

Note: (2 hinges+2 mounting plate+8 screws)

Special Order

Stock Available

Metallamat A Concealed Hinges

Opening angle 110°

Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility.
Door thickness: 16 to 19 mm



Drilling dimensions for cup fixing Screw Fixing



Full overlay mounting Opening angle 110°



Article No.	Mounting
316.30.500	0 CRANK

Half overlay mounting Opening angle 110°



Article No.	Mounting
316.30.501	9 mm CRANK

Inset mounting Opening angle 110°



Article No.	Mounting
316.30.502	18 mm CRANK

Mounting Plates for Metallamat Hinges: Screw fixing with chip board screws

Article No.	Thickness
316.51.502	2 mm

Note: Fixing screws not supplied with hinges. To be ordered separately.
(Please use nickel plated screws to avoid rusting)

Article No. : 015.35.824
4 x 15mm Hospa Chipboard Screws

Special Order

Stock Available

Metallamat A Concealed Hinges

Opening angle 92°

Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility.
Door thickness: 24 to 35 mm

Cup Dimension



Drilling dimensions for cup fixing Screw Fixing



Full overlay mounting Opening angle 92°

Mounting plate distance



Article No.	Mounting
316.31.500	0 CRANK

Half overlay mounting Opening angle 92°

Mounting plate distance



Article No.	Mounting
316.31.501	9mm CRANK

Inset mounting Opening angle 92°

Mounting plate distance



Article No.	Mounting
316.31.502	17mm CRANK

Mounting Plates for Metallamat Hinges: Screw fixing with chip board screws

Article No.	Thickness
316.51.502	2 mm

Note: Fixing screws not supplied with hinges. To be ordered separately.
(Please use nickel plated screws to avoid rusting)

Article No. : 015.35.824
4 x 15mm Hospa Chipboard Screws

Special Order

Stock Available

Metallamat Glass Door Hinges

Metallamat A Concealed Hinges

Glass doors thickness : 4 to 5 mm
Opening angle 92°

Cup dimensions



Drilling dimensions for cup fixing



Minimum gap for glass doors
Dimensions and gap specifications in drawings and tables are calculated.
• With factory settings

Inset mounting
Opening angle 92°

Mounting plate distance



Article No.	Cup fixing
317.02.502	Screw fixing 17.5 Crank

Cruciform Mounting Plates, Screw-Mounted
Screw fixing with chipboard screws

Article No.	Reinforcement
317.93.602	2 mm

Note: Fixing screws not supplied with hinges. To be ordered separately.

Article No. : 015.35.824
4 x 15mm Hospa Chipboard Screws

Front Plates: Straight-edged
Material: Plastic

Article No.	Finish
317.10.410	Chrome-plated, Polished

Front Plates: Round
Material: Plastic

Article No.	Finish
317.10.420	Chrome-plated, Polished

Special Order

Stock Available

DUOMATIC Concealed Hinges

DUOMATIC **Concealed hinge**
For profile doors up to 40 mm, opening angle 94°

Minimum distance between door and side panel

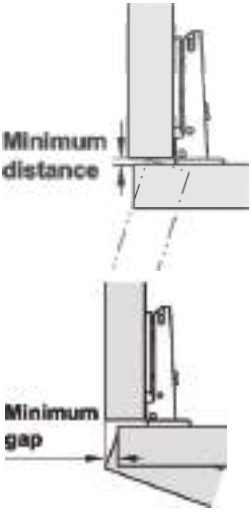

Drilling pattern for cup fixing for screw fixing



Full overlay mounting

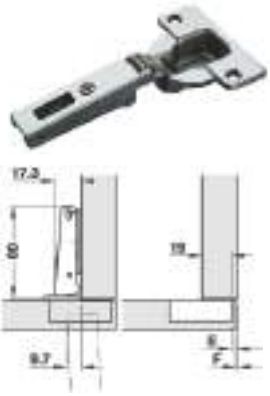

Article No.	Cup fixing
329.05.605	0 Crank

Half overlay mounting

Article No.	Cup fixing
329.05.614	11 Crank

Inset mounting

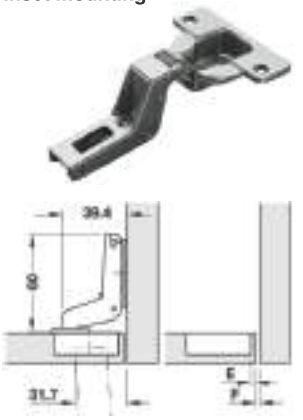

Article No.	Cup fixing
329.05.632	22 crank

DUOMATIC **Cruciform mounting plates**
Screw fixing with chipboard screws

Article No.	Thickness
329.73.502	2 mm

Note: Fixing screws not supplied with hinges. To be ordered separately.

Article No. : 015.35.824
4 x 15mm Hospa Chipboard Screws

Special Order

Stock Available

Furniture Hinges

Easy Mount Hinge: Screw-mounted
Side panel thickness from 16 to 22 mm
Opening angle 90°
Shutter Thickness from 16mm

Material: Steel

Article No.	
343.33.970	Galvanized

Flap Hinge: For use with Lid Stays for Bars, Study Tables etc.
Three-dimensional adjustable,
Opening angle 90°
Material: Zinc Alloy



a = side and depth adjustment
b = height adjustment: +2, -1 mm

Article No.	Finish
342.66.730	Nickel plated

Special Order

Stock Available

Kubikina Hinge

Area of application: For overlay or inset mounting
Opening angle: 180°
Material: Zinc alloy/plastic
Installation: For screw fixing
Adjustment facility: Height ± 1.5 mm, side ± 1 mm, depth ± 1.5 mm (with overlay mounting), height ± 1.5 mm, side ± 1.5 mm, depth ± 1 mm (with inset mounting)

3-dimensionally adjustable for shutter alignment with millimetre accuracy

Article No.	Finish
341.24.415	Chrome plated matt/ Grey

Chrome plated matt / Grey

Dimensions



Drilling pattern



With wood thickness 18 mm: A = 9 mm
With wood thickness >20 mm: A = 10 mm

Installation



Overlay door mounting

Inset door mounting

Number of hinges per door



Sample measurements for 20 mm thick wood
Hinge distance min. 500 mm
Door width up to 600 mm
The door's width must not exceed its height

Special Order

Stock Available

Technical Information for DUO & DUO Forte

Duo – The fitting with dual function

For flaps made of wood, glass or with aluminium frame

- Adjusting the arms (swanneck) turns the lid stay into a flap stay
- Less space required inside the cabinet
- Wear-resistant friction coupling with large adjusting range

Application

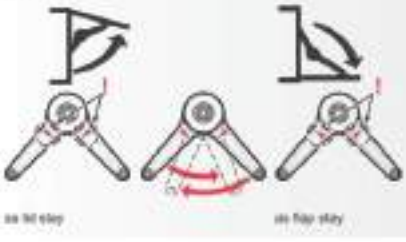

as lid stay as flap stay

Front adjustment facility

Height adjustment* | Side adjustment* | Tilting angle adjustment* | Holding power adjustment

* depends on the hinges that are installed

Holding power adjustment with SW4 Allen key
(Cat. No. 938.20.241)

Stronger holding power
= **locking** function
= flap locks in any position (multi-position stop)

Weaker holding power
= **braking** function
= lid stay closes softly/flap stay opens gently

Surfaces
Black, nickel-coloured or white

Lateral space requirement/ side distance (S) for screw-on bracket

S = 12 + door overlay

Minimum installation depth

Duo standard



Duo forte

Special Order

Stock Available

DUO

Lid Stays - Duo
With adjustable braking effect

Area of application: For wooden flaps and flaps with aluminium frame, also suitable as flap stays
For flaps with aluminium frame: width 20 mm or 45 mm
Opening angle: 75°, 90° or 110°
Version: With self-closing function
Mounting: For left and right hand use
Flap Height: upto 500mm
Weight: 2 to 15kg

Light version **HUWIL**

Article No.	Area of application
373.66.211	For flaps made of wood or with aluminium frame. Frame width 45 mm and above **Finish: Black**
373.66.611	For flaps made of wood or with aluminium frame. Frame width 45 mm and above **Finish: Nickel Plated**
373.66.261	For flaps made of wood or with aluminium frame. Frame width 45 mm and above **Finish: White**
373.66.621	For flaps with aluminium frame with frame width 20 mm **Finish: Nickel Plated**

Special Order

DUO Forte

Flap Stays / Duo Forte

- **Opening angle:** 75°, 90° or 110° (with different opening angles of hinges)
- **Mounting:** For left and right hand use
- The Flap locks in any position and it stops in end position when released by slight pressure
- Can be mounted on wooden door flaps and for door flaps with aluminum frame
- Gentle push helps in opening and closing of the Flap/Cabinet Door
- Made of Zinc alloy and the mounting bracket are made of steel
- Flap weight bearing capacity is from 3kg - 15kg

Flap Height: upto 700mm

Area of application: Also suitable for use as flap stays. Opening angle: 75°, 90° or 110°
Material: Stay: Zinc alloy
Mounting bracket: Steel
Finish: Black, Nickel plated & White
Version: With self mounting: For left and right hand use
Installation: Without tools (clip mounting system)
Distance from edge: 28 mm
Lock Function:
Locking: Flap locks in any position
Breaking function: Flap locks in end position, release by slight pressure

Article No.	Area of application
373.66.311	DUO Forte Flap Stay, **Black**, For Wood/ED = 28mm
373.66.631	DUO Forte Flap Stay, **Nickel Plated**, For Wood/ED = 28mm
373.66.371	DUO Forte Flap Stay, **White**, For Wood/ED = 28mm
373.66.641	DUO Forte Flap Stay, **Nickel Plated**, For Aluminium/ED = 28mm

Adapter: A must for all aluminium frame applications. (To be ordered separately)

Article No.	Finish
563.25.960	Nickel plated

Stock Available

DUO Installation

Installation as lid stay

Opening angle 75°

Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
250	7.0	15.0	9.0	15.0
300	6.0	12.0	7.5	15.0
350	5.0	10.0	6.5	13.0
400	4.5	9.0	6.0	11.5
450	4.0	8.0	5.0	10.0
500	3.5	7.0	4.5	9.0

Opening angle 90°



Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
250	6.0	12.0	7.5	15.0
300	5.0	10.0	6.5	13.0
350	4.5	8.5	5.5	11.0
400	4.0	7.5	5.0	10.0
450	3.5	6.5	4.5	8.5
500	3.0	6.0	4.0	7.5

Opening angle 110°

Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
200	6.0	12.0	8.0	15.0
250	5.0	9.5	6.0	12.0
300	4.0	8.0	5.0	10.0
350	3.5	7.0	4.0	9.0
400	3.0	6.0	4.0	7.5
450	2.5	5.5	3.5	7.0
500	2.0	5.0	3.0	6.0

Installation as flap stay (use 2 fittings)

Separate catch required

Separate catch is not required.
Application possible from a cabinet height of 300 mm (internal height min. 255 mm).
Space requirement for fitting inside the cabinet when the flap is being closed:
130 mm from front edge of cabinet

Cabinet height mm	Flap weight kg	
	Locking function 2 fittings	Braking function 2 fittings
200	15.0	15.0
250	12.0	15.0
300	10.0	13.0
350	8.5	11.0
400	7.0	10.0

Special Order

Stock Available

DUO Forte Installation

Installation as lid stay

Opening angle 75°

Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
300	9.0	15.0	12.0	15.0
350	8.0	15.0	11.0	15.0
400	7.0	14.0	9.0	15.0
450	6.0	12.5	8.0	15.0
500	5.5	11.0	7.0	15.0
550	5.0	10.0	6.5	13.0
600	5.0	9.5	6.0	12.0
650	4.0	8.5	5.5	11.0
700	4.0	8.0	5.0	10.5

Opening angle 90°



Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
300	7.5	15.0	9.0	15.0
350	6.5	13.5	8.0	15.0
400	6.0	12.0	7.5	15.0
450	5.5	11.0	7.0	14.0
500	5.0	9.5	6.0	12.0
550	4.5	8.5	5.5	11.0
600	4.0	8.0	5.0	10.0
650	3.5	7.0	5.0	9.5
700	3.0	7.0	4.0	9.0

Opening angle 110°



Cabinet height mm	Flap weight kg			
	Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
250	7.5	15.0	10.0	15.0
300	6.5	12.5	8.0	15.0
350	5.5	11.0	7.0	14.0
400	4.5	9.5	6.0	12.5
450	4.0	8.5	5.5	11.0
500	4.0	7.5	5.0	10.0
550	3.5	7.0	4.0	9.0
600	3.0	6.0	4.0	8.0
650	3.0	5.5	4.0	7.5
700	3.0	5.0	3.5	7.0

Special Order

Stock Available

GAS SPRING

	373.82.001	373.82.002	373.82.003	373.82.004	373.82.005
	∢ = 75°				
300	2,0 kg	2,7 kg	3,4 kg	4,1kg	4,7 kg
400	1,5 kg	2,0 kg	2,6 kg	3,1 kg	3,5 kg
500	1,2 kg	1,6 kg	2,0 kg	2,5 kg	2,9 kg
600	1,0 kg	1,4 kg	1,8 kg	2,0 kg	2,4 kg
	∢ = 90°				
300	1,8 kg	2,4 kg	3,0 kg	3,6 kg	4,7 kg
400	1,3 kg	1,8 kg	2,2 kg	2,7 kg	3,2 kg
500	1,1 kg	1,4 kg	1,8 kg	2,1 kg	2,5 kg
600	0,9 kg	1,2 kg	1,5 kg	1,8 kg	2,1 kg
	∢ = 110°				
300	1,6 kg	2,1 kg	2,6 kg	3,1 kg	3,5 kg
400	1,2 kg	1,6 kg	1,9 kg	2,3 kg	2,6 kg
500	0,9 kg	1,2 kg	1,6 kg	1,9 kg	2,2 kg
600	0,8 kg	1,0 kg	1,3 kg	1,6 kg	1,9 kg

Specifications:

- Application: For Wood & Aluminum Shutters
- Material: Steel with Power Coated
- Finish: Silver
- Center to Center: 245±2 mm
- Piston Capacity: 60,80,100,120,150 N
- Weight Capacity: Refer Chart
- Usage: For Lid Stay (upward opening)
- Max Panel Height: 600 mm
- Max Width: 900 mm

Article No.	Power of Gas Spring
483.98.060	60N equivalent to 6 kg
483.98.061	80N equivalent to 8 kg
483.98.062	100N equivalent to 10 kg
483.98.063	120N equivalent to 12 kg
483.98.064	150N equivalent to 15 kg



Opening Angle	Dim.mm		
	A	B	C
75°	260	80	25
90°	238	80	25
110°	225	70	25

Special Order

Stock Available

Gas Spring (Upward Opening)

Specifications:
Material: Steel with Power Coated
Finish: Silver
Center to Center: 254±2 mm
Capacity: 200 & 250 N



Article No.	Description
373.83.006	Gas Lift For Upward Opening C/c 254 mm 200 N
373.83.007	Gas Lift For Upward Opening C/c 254 mm 250 N

Special Order

Stock Available

GAS SPRING

Gas Spring (Downward Opening)

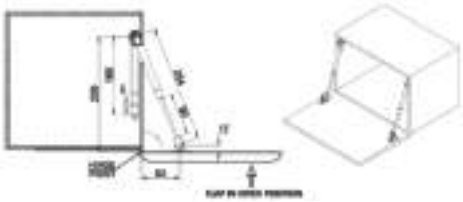

Specifications:
Material: Steel with Power Coated
Finish: Silver
Center to Center: 245±2 mm

Article No.	Description
373.84.001	Gas Lift For Downward Opening C/c 245 Mm

Special Order

Stock Available

Symo 3000 RIM Locks with Accessories

Rim Lock: For Drawer and Cabinet shutters.
Cylinder housing:
Length 22 mm/32 mm
Locking Direction: Left, Right or Drawer version.
Backset: 25 mm
Material & Finish: Zinc Alloy, Nickel Plated

Article No.	Length	Locking Direction
232.26.600	22 mm	Right
232.26.610	22 mm	Left
232.26.620	22 mm	Drawer Version
232.26.680	32 mm	Drawer Version

Cylinder core PLW for all Symo 3000 Locks.
Locking system: With 6 plate levers
(plate cylinder removable core)

Article No.	
210.40.600	Housing: Zinc Alloy Nickel-plated Plate Levers: Brass Supplied with 2 Keys

Cylinder Rosette

Article No.	Finish
219.19.677	Steel, Nickel-Plated

Striking plate for screw-mounting

Article No.	Finish
239.40.703	Steel, Nickel-Plated

Striking plate for screw-mounting

Article No.	Finish
239.41.013	Steel, Nickel-Plated

Removal-key Symo 3000

Article No.	Finish
210.11.090	Steel, Nickel-Plated

Ordering Information	
232.26.600	1 No.
210.40.600	1 No.
219.19.677	1 No.
239.40.703	1 No. OR
239.40.013	1 No.

Ordering Information	
232.26.610	1 No.
210.40.600	1 No.
219.19.677	1 No.
239.40.703	1 No. OR
239.40.013	1 No.

Ordering Information	
232.26.620	1 No.
210.40.600	1 No.
219.19.677	1 No.
239.40.703	1 No. OR
239.40.013	1 No.

Ordering Information	
232.26.680	1 No.
210.40.600	1 No.
219.19.677	1 No.
239.40.703	1 No. OR
239.40.013	1 No.

Special Order

Stock Available

Furniture Locks **Secure - T**

Secure -T Furniture Locks

Multi Purpose Lock

Finish : Chrome Polished
Installation : Screw Fixing
Material : Zinc Alloy
Supplied with: Two Metal Keys

Article No.	Thickness for Door
232.01.250	22mm
232.01.260	32mm

Push Lock

Article No.	Description
234.32.600	Sliding Door Push Lock

Cupboard Lock

Article No.	Description
230.17.221	Cupboard Lock (22mm)

Note: No. of key change 120

Special Order

Secure -T Furniture Locks

Drawer Pedestal Lock

Front Central Lock, with 600mm Aluminium Bar

Article No.	Description
234.99.260	Front Central Lock

Multipurpose Lock

Finish: Nickel Plated
Material: Zinc Alloy/Brass
Supplied With: 2 foldable key
Suitable for : 22 mm thickness of drawer

Article No.	No. of Key Change
232.01.280	1 to 240
232.01.990	Common key for this lock

Multipurpose lock for Drawers

Finish: Silver
Material: Lock Body - SS
Key - Brass
Supplied with: 11 pin brass dimple key
Suitable for: 20,25 and 30mm drawer panel
Key Combination: 1,00,000

Article No.	Thickness for drawer
223.64.001	20 mm
223.64.002	25 mm
223.64.003	30 mm

Multipurpose lock for Wardrobe

Finish: SS Matt
Material: Lock Body - SS
Key - Brass
Supplied with: 11 pin brass dimple key
Suitable for: 25,30 and 35mm door panel
Key Combination: 1,00,000

Article No.	Thickness for door
223.64.012	25 mm
223.64.013	30 mm
223.64.014	35 mm

Stock Available

Multipurpose Lock

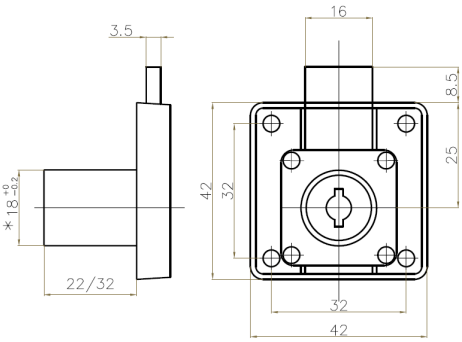

Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Size: 22 & 32 mm
- Key Combination: 960 numbers
- Master Key: Yes

Master Key

Article No.	Description
232.38.922	Multipurpose Lock 22 Mm Nickel Plated, 960 Key Combination
232.38.921	Multipurpose Lock 32 Mm Nickel Plated, 960 Key Combination
209.99.900	Master Key, Brass

Special Order

Stock Available

Pedestal Lock

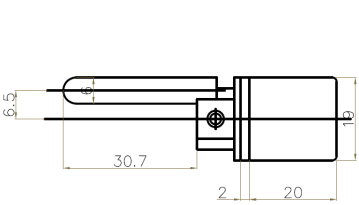



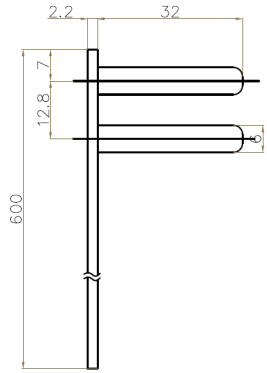

Product Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Key Combination: 960 numbers
- Master Key: Yes

Article Consists of:

- Lock body
- Brass keys (2 nos)
- Central locking rod (Aluminum bar) 600 mm
- Finish: Nickle Plated
- Rosette
- Bar guide (2 nos)
- Arresting pin (3 nos)

Special Order

Stock Available

Pedestal Lock

Master Key

Article No.	Description
234.99.961	Pedestal Front Lock D19x20 Mm Nickel Plated, 960 Key Combination
209.99.900	Master Key, Brass

Special Order

Stock Available

Espagnolette Lock

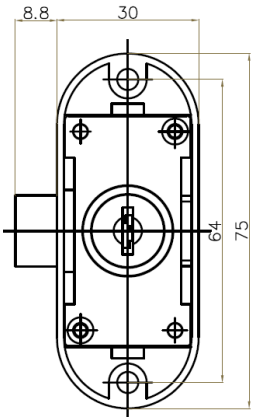

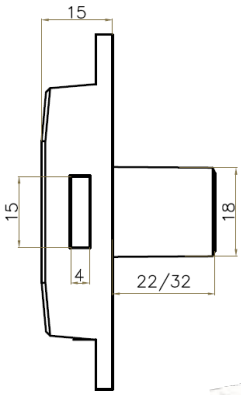

Master Key

Product Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Sizes: 22 & 32 mm
- Key Combination: 960 numbers
- Master Key: Yes
- Backset: 15 mm
- Rod: Need to order separately (2 Pcs per Lock)

Article Consists of:

- Lock body
- Brass keys (2 nos)
- Lock bolt (2 nos)
- Lock hook (2 nos)
- Bar guide big (2 nos)
- Bar guide small (2 nos)
- Strike plate
- Rosette

Note: Locking rod needs to be order separately (available for 1.5 m length)

Special Order

Stock Available

Espagnolette Lock

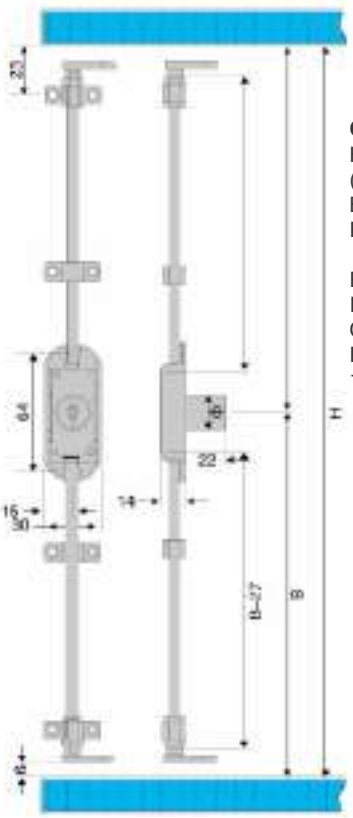

Calculation for Rod Cutting:
H: Internal height of cabinet
(should not exceed 3050 mm)
B: Center of Cabinet
Rod length: B-27 mm

E.G
Internal Cabinet height: 2700 mm (H)
Center of Cabinet: 1350 mm (B)
Rod length at each side:
1350-27 = 1323 mm

Article No.	Description
225.65.620	Espagnolette Lock 22 Mm Nicke Plated
225.65.621	Espagnolette Lock 32 Mm Nicke Plated
225.65.629	Rod For Espagnolette Lock 1.5 Meter Nickel Plated
209.99.900	Master Key, Brass

Special Order

Stock Available

Espagnolette Lock

Technical Details:

Lock Hook

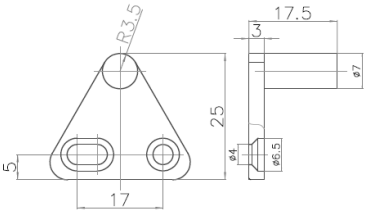

Bar guide (Small)



Bar guide (Big)



Lock Hook

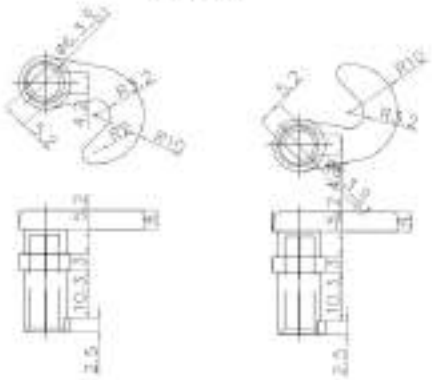

Strike Plate

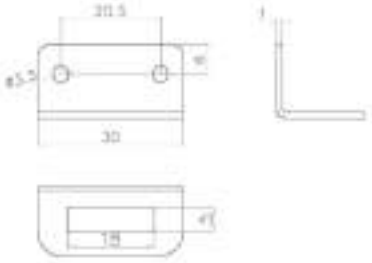

Special Order

Stock Available

Sliding Door Lock

Article No.	Description
232.20.206	Sliding lock for 2 Door Sliding Fitting
232.20.712	Anti-Levering Device
232.20.207	Sliding lock for 3 Door Sliding Fitting

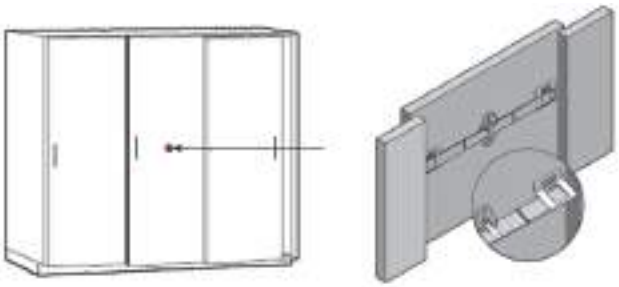

Special Order

Stock Available

Furniture Locks

Sliding Locks

Auto Latch Lock upto 20mm

Article No.	Finish
232.01.778	Zinc Nickel plated

Glass Door Lock upto 6mm

Article No.	Finish
232.01.777	Nickel plated

Note: Refer product communication for more details

Special Order

Stock Available

Furniture Catches

Automatic door catch, zinc

Article No.	Finish
245.58.754	Nickel plated

Magnetic Catch
For a panel weight of 4-5 kg.
Version: Movable housing
Supplied with counter piece

Article No.	Colour
246.29.105	Brown
246.29.301	Black
246.29.703	White

Magnetic double catch
For a panel weight of 6-8 kg.
Version: Movable housing
Supplied with counter piece

Article No.	Colour
246.84.713	White

Special Order

Furniture Catches

MINI LATCH Spring catch

Article No.	Finish
245.54.701	Nickel plated

Roller Catch Screw On, Nylon, Plastic Catch & Stop

Article No.	Finish
243.15.704	Plastic White

Twin Roller Catch, Plastic,white

Article No.	Finish
244.03.700	Plastic White

Sliding Locks

Recessed swivel bolt lock
Stoplock with plate cylinder
For Sliding Wardrobe/Filing/ Storage units should overlap by 28 mm.
Available: left and right handle with 5 plates = 200 different key changes possible
Cylinder: Zinc alloy, matt nickel-plated
Accessories supplied 2 Keys



Article No.	Dim. X	Direction
233.90.294	28 mm	Left
233.90.285	28 mm	Right

Stock Available

Bed Fitting Mechanism



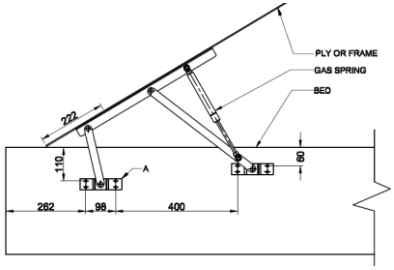

Specifications:

Material: Steel with Power Coated
Finish: Grey (Textured)

Article No.	Description	Weight of Wooden Mattress	Weight of Foam Mattress	Total Weight
274.52.032	Bed Fitting Mechanism 20 Inches Steel Silver Grey	-	-	-
274.52.033	Bed Fitting Mechanism 34 Inches Steel Silver Grey	-	-	-
274.52.034	Bed Fitting Mechanism 48 Inches Steel Silver Grey	-	-	-
274.52.035	Bed Fitting Mechanism 60 Inches Steel Silver Grey	-	-	-
274.52.040	Gas Spring 500 Mm Silver Grey 750 N	30 kg	20 kg	50 kg
274.52.041	Gas Spring 500 Mm Silver Grey 1000 N	35 kg	25 kg	60 kg
274.52.042	Gas Spring 500 Mm Silver Grey 1250 N	40 kg	30 kg	70kg
274.52.043	Gas Spring 500 Mm Silver Grey 1500 N	40 kg	40 kg	80 kg
274.52.044	Gas Spring 500 Mm Silver Grey 1750 N	50 kg	40kg	90 kg
274.52.045	Gas Spring 500 Mm Silver Grey 2000 N	60 kg	40 kg	100 kg

Special Order

Stock Available

Dining Folding Mechanism

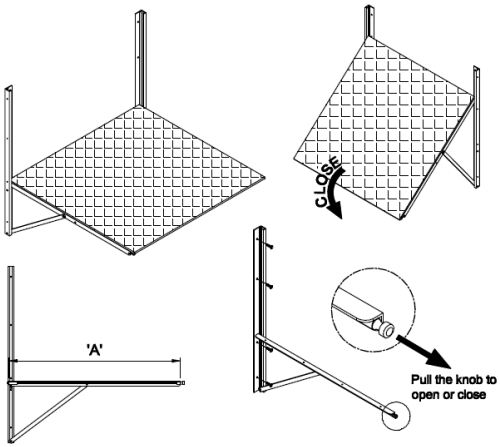

Specifications:

- Material: Steel with Power Coated
- Finish: Grey (Textured)
- Dimension: 915 mm depth

Article No.	Description
642.87.000	Dining & Folding Mechanism 915 Mm

Special Order

Stock Available

Drawer Runners

Ball Bearing Runner
Product Features:
Material: Mild Steel
Finish: Zinc Plated
Weight Bearing Capacity: Approx. 25 Kg
Extension: Full extension for all sizes
Available Sizes: 250 to 550 mm

Finish: Zinc Galvanized

Article No.	Length
420.55.900	250 mm
420.55.901	300 mm
420.55.902	350 mm
420.55.903	400 mm
420.55.904	450 mm
420.55.904	500 mm
420.55.906	550 mm

Finish: Black

Article No.	Length
420.55.300	250 mm
420.55.301	300 mm
420.55.302	350 mm
420.55.303	400 mm
420.55.304	450 mm
420.55.305	500 mm
420.55.306	550 mm

Special Order

Drawer Runners: Ball Bearing Slides Side Mounted Full Extension.Load bearing capacity: Up to 30 kg/pair
Finish: Zinc Galvanized, Black

Finish: Zinc Galvanized

Article No.	Length
422.87.900	250 mm
422.87.901	300 mm
422.87.902	350 mm
422.87.903	400 mm
422.87.904	450 mm
422.87.905	500 mm
422.87.906	550 mm

Finish: Black

Article No.	Length
422.87.300	250 mm
422.87.301	300 mm
422.87.302	350 mm
422.87.303	400 mm
422.87.304	450 mm
422.87.305	500 mm
422.87.306	550 mm

Ball Bearing Slides Full Extension, Side mounted
Features: Runner can be disengaged using release lever, with stay closed feature for holding in closed position.
Load bearing capacity: Up to 45 kg/pair
Finish: Zinc Galvanized, Black

Finish: Black

Article No.	Length
422.58.325	250 mm
422.58.330	300 mm
422.58.335	350 mm
422.58.340	400 mm
422.58.345	450 mm
422.58.350	500 mm
422.58.355	550 mm
422.58.360	600 mm
422.58.365	650 mm
422.58.370	700 mm

Stock Available

Drawer Runners

Finish: Zinc Galvanized

Article No.	Length
422.58.925	250 mm
422.58.930	300 mm
422.58.935	350 mm
422.58.940	400 mm
422.58.945	450 mm
422.58.950	500 mm
422.58.955	550 mm
422.58.960	600 mm
422.58.965	650 mm
422.58.970	700 mm

Special Order

Soft Close Ball Bearing Runner 40 Kg

Finish:Black

Article No.	Length
432.02.131	300 mm
432.02.132	350 mm
432.02.133	400 mm
432.02.134	450 mm
432.02.135	500 mm
432.02.136	550 mm
432.02.137	600 mm

Finish: Zinc Plated

Article No.	Length
432.02.191	300 mm
432.02.192	350 mm
432.02.193	400 mm
432.02.194	450 mm
432.02.195	500 mm
432.02.196	550 mm
432.02.197	600 mm

Push to open 40 Kg
Material: Mild Steel
Finish: zinc galvanized
Weight Bearing Capacity: upto 40kg / pair
Extension: Full extension for all sizes
Available sizes: 300 to 600mm

Finish: Zinc Plated

Article No.	Length
422.02.061	300 mm
422.02.062	350 mm
422.02.063	400 mm
422.02.064	450 mm
422.02.065	500 mm
422.02.066	550 mm
422.02.067	600 mm

Stock Available

Drawer Runners

Econo Box :
Self closing drawer System slide with double stop Single extension.
Load bearing capacity : 25 kg.
Finish : Steel, Duly epoxy coated Cream RAL9001.

Article No.	Height	Length
555.93.440	54 mm	400 mm
555.93.445	54 mm	450 mm
555.94.440	86 mm	400 mm
555.94.445	86 mm	450 mm
555.94.450	86 mm	500 mm
555.95.440	118 mm	400 mm
555.95.445	118 mm	450 mm
555.95.450	118 mm	500 mm

Special Order

Soft Close Mechanism
for Draw Runners & Meta Box

Area of application:
Roller runners, ball bearing runners without retainer retention, groove mounted runners, Metabox, Econobox.
Load Bearing capacity:
25 kg load bearing capacity, with 2 sided installation
Material: Plastic
Colour: Light grey and black
Installation: On one or both side, soft and self closing mechanism for scre fixing to side panel of cabinet, follower is fix to side panel of drawer.

smuso

Article No.	Runner Length
432.13.507	For ball bearing & Soft Roller Runners
432.13.508	For Single Wall Runners (Metabox & Econobox)

Stock Available

Furniture Castors

Tandema 50 twin wheel castor
with mounting plate
Load bearing capacity: 50 kg per castor
Wheel Diameter: 50 mm
Finish: Plastic, matt black

Without brake

With brake



Article No. Brake	Article No. Without Brake	Installation Height
660.08.321	660.07.321	63 mm

Twin Wheel Castor
with mounting plate but without brake
Wheel Diameter: 35 mm
Load bearing capacity: 25 kg per castor
Finish: Plastic, matt black



Article No.	Installation height
660.07.301	48 mm

Swivelling castor: Press fitted in a housing of Ø 40 mm
Load bearing capacity: 50 kg per castor
Finish: Plastic, Black
Castor: Hard Plastic

Article No.	Wheel Diameter
661.04.309	15 mm

Ball Castor: Recessed mounted
Material: Steel
Finish: Yellow Chromatized Housing, Chrome Plated Ball

Article No.	Recess Part Ø mm
661.02.210	16 mm
661.02.230	23.5 mm
661.02.250	33 mm

Castor: For forward/backward running only. Preferably for bed storage pull-outs
Load bearing capacity: 40 kg per castor
Finish: Steel housing Galvanized, white plastic wheel
Running surface: Hard Floors
Wheel Diameter: 35 mm

Article No.	Installation Height
660.98.904	41 mm

Special Order

Stock Available

Table top swivel fitting

Swivel Table

Width: max. 1200mm
Depth: max. 600mm
Panel Thickness:
Top Panel: ≥25mm
Side Panel: ≥28mm

Article No.	Size
646.31.000	Table top swivel fitting

Note:
Castors needs to order seperately
661.05.320 or 661.05.330

Special Order

Furniture Glides

Material: Plastic
Height: 5 mm
Colour: White
Diameter: 19-25 mm
Installation: Knocking in

Article No.	Diameter in mm
650.02.190	19 mm

Material: With Intermediate Plastic layer, Base in grey felt
Height: 9 mm
Diameter: 20 mm
Installation: Screw fixing

Article No.	Diameter in mm
650.20.720	20 mm

Material: Brown Felt
Colour: Brown
Installation: Glue fixing (self adhesive)

ROUND

Article No.	Diameter in mm
650.06.103	20 mm
650.06.105	24 mm

Material: Brown Felt
Colour: Brown
Installation: Glue fixing (self adhesive)

SQUARE

Article No.	Size in mm
650.06.121	20 x 20 mm

Stock Available

Brackets

TIKLA bracket: Folding upwards
Load bearing capacity:
500 kg per pair
Finish: Bright-galvanized
Dimension (A x B x C x D):
360 mm x 80 mm x 180 mm x 100 mm

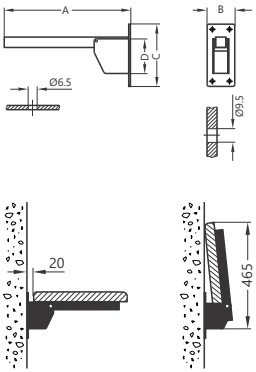

Article No.	Finish
287.53.936	Bright galvanized

Connecting Brackets

Load bearing capacity
100kgper pair

Material: Steel
Finish: Galvanized
Version: With locking mechanism

Article No.	Load bearing capacity
287.54.721	100 kg

HEBGO bracket: Folding upwards
Load bearing capacity: 500 kg per pair
With and Without pull-in spring
Finish: Hot-galvanized
Dimension (A x B x C x D):
380 mm x 80 mm x 180 mm x 100 mm

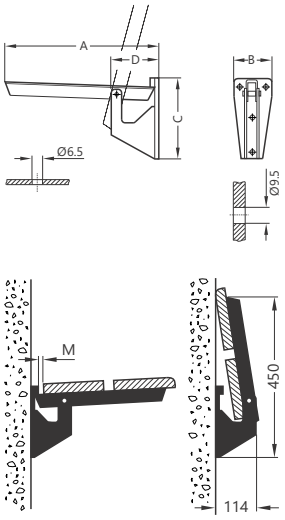

Without pull-in spring

Article No.	Finish
287.47.917	Hot galvanized

With pull-in spring

Article No.	Finish
287.47.920	Hot galvanized

Special Order

Stock Available

Fixing Screws

Hospa Chipboard Screws, Countersunk Head with Full Threading
Finish : Steel, Nickel Plated
MOQ: 1000 pcs



Article No.	Diameter x Length
015.35.637	3.5 mm x 15 mm
015.35.824	4.0 mm x 15 mm
015.35.833	4.0 mm x 17 mm
015.35.842	4.0 mm x 20 mm

Hospa Chipboard Screws, Countersunk Head with Full Threading
Finish : Steel, Galvanized
MOQ: 1000 pcs



Article No.	Diameter x Length
015.31.620	3.5 mm x 13 mm
015.31.657	3.5 mm x 20 mm
015.31.675	3.5 mm x 25 mm
015.31.684	3.5 mm x 30 mm
015.31.951	4.5 mm x 35 mm

Special Order

Hospa Chipboard Screws, Countersunk Head with Full Threading
Finish : Steel, Galvanized
MOQ: 1000 pcs



Article No.	Diameter x Length
015.31.255	2.5 mm x 16 mm
015.31.335	3.0 mm x 15 mm
015.31.540	3.0 mm x 17 mm
015.31.639	3.5 mm x 15 mm
015.31.648	3.5 mm x 17 mm
015.31.853	4.0 mm x 25 mm
015.31.871	4.0 mm x 35 mm
015.31.942	4.5 mm x 30 mm

Hospa Chipboard Screws, Countersunk Head with Partly Threading
Finish : Steel, Galvanized
MOQ: 1000 pcs



Article No.	Diameter x Length
015.41.886	4.0 mm x 40 mm
015.41.966	4.5 mm x 40 mm

Flat Head Combination Cross Slot Screw
Finish : Steel, Galvanized
MOQ: 1000 pcs

Article No.	Diameter x Length
022.35.252	4 mm x 25 mm
022.35.305	4 mm x 30 mm

Hospa Chipboard Screws, Countersunk Head with Partly Threading
Finish : Steel, Yellow chromatized
MOQ: 1000 pcs



Article No.	Diameter x Length
015.44.341	6.0 mm x 50 mm

Hospa Chipboard Screws, Pan Head with Full Threading
Finish: Steel, Galvanized
MOQ: 1000 pcs



Article No.	Diameter x Length
015.71.633	3.5 mm x 15 mm
015.71.848	4.0 mm x 20 mm
015.71.857	4.0 mm x 25 mm
015.71.875	4.0 mm x 35 mm
015.71.884	4.0 mm x 40 mm
015.71.928	4.5 mm x 20 mm

Hospa Chipboard Screws, Countersunk Head with Partly Threading
Finish : Steel, Galvanized
MOQ: 5000 pcs



Article No.	Diameter x Length
017.01.944	4.5 mm x 30 mm
017.01.971	4.5 mm x 45 mm

Stock Available

Unitool

Multi Drilling Jig: For precision drilling of Minifix connectors, concealed hinges, Mounting plates, System 32 mounting panels

Supplied with
1 Basic jig with stop plate and drilling sleeves for Ø 5 mm drill holes
1 Replaceable drilling jig for System 32
1 Drill guide for drilling holes in edges of 16/19/22 mm
1 Drill guide for drilling holes in edges of 15/18/18 mm
4 Drilling sleeves Ø 8 mm
2 Marking pins for depth gauge
1 Allen key SW 2

Article No.	
001.25.000	Unitool multi drilling jig
Also order	
001.25.031	Drill guide for Ø 35mm
001.25.023	Drill guide for Minifix 15, d=34 mm
001.28.129	Depth gauge

Special Order

Stock Available

Sliding Solutions

HÄFELE

Classic IF 45

PAGE 80

Classic IF 50

PAGE 83

Classic 50 VF SR (ST-18)

PAGE 86

Classic 80 W

PAGE 90

Classic 60 W Smuso

PAGE 93

Design Ergo 80

PAGE 96

ECHO Sliding Door

PAGE 100

Classic IF 45





Straight sliding system for wooden wardrobe and furniture doors.

Hardware Specification:

- Vertical adjustment mechanism which enable adjustment up to 6 mm
- For doors within 16 and 19 mm thickness
- Rolling system with ball bearing wheels
- For single or double guide applications

Article No.: 405.21.100

Sliding door kit consists of

- 2 Rollers with Bracket
- 1 Bottom Guide

Note: If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Special Order

Stock Available

Classic IF 45

Product Name	Article No.	L mm	
Silver Anodized Aluminium Top Single Track (Note: Track to be ordered separately)	**405.21.603**	3000 mm	
Silver Anodized Aluminium Top Single Track (Note: Track to be ordered separately)	**405.21.613**	3000 mm	
Brake Stop (Note: Brake stop to be ordered separately)	**405.21.300**		

BOM LIST

Description	Article No.
Classic IF 45 with 3m track for single door	**401.29.004**
Classic IF 45 with 3m track for double door	**401.29.005**
Classic IF 45 - single track 1 door kit with 3m track & Smuso	**405.21.000**
Classic IF 45 - double track 2 door kit with 3m track & Smuso	**405.21.001**

Single Door

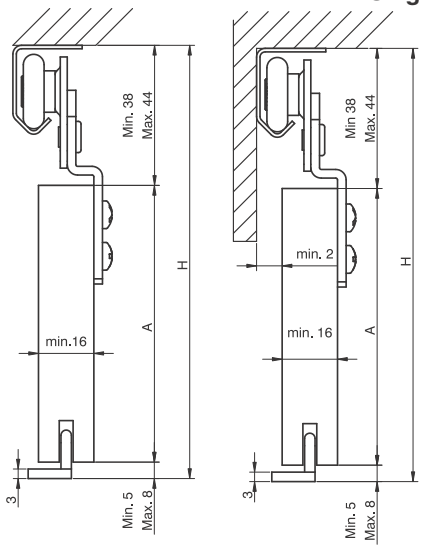

A Min. = H- 52 (max.)
A Max. = H - 43 (min.)

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

Classic IF 45

Double Door

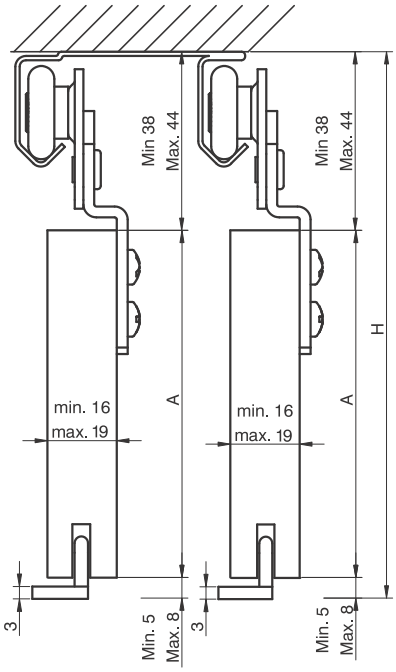

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

Classic IF 50





Infront sliding system for wooden wardrobe and furniture doors.

Hardware Specification:

- Bottom running rollers for smooth and effortless movement.
- The pre-drilled holes are oblong in shape to provide for adjustability and alignment of panels.
- The top and bottom (common) tracks are extruded anodized Aluminium profiles for smooth movement of the roller.
- Very easy to install and ensures running stability for bottom running sliding.

Special Order

Stock Available

Classic IF 50

Complete accessories set for 1 door
Article No.: 404.24.000
Sliding door kit consists of
- 2 Runners
- 2 Bottom Guides
- 2 End Stoppers

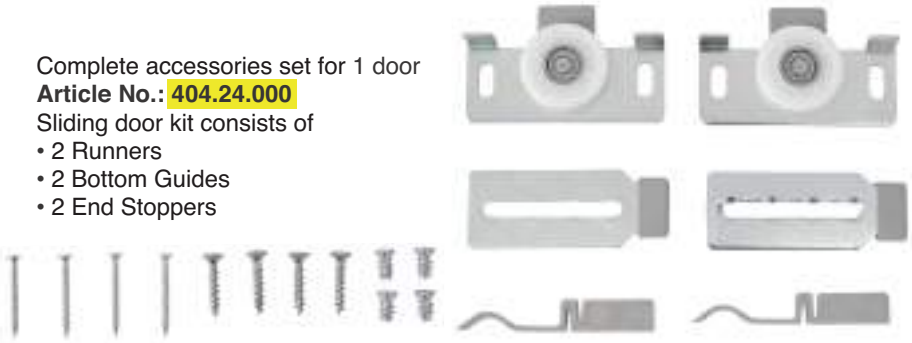

Note: If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Product Name	Article No.	L mm	
Extruded Aluminium Top Track (Note: Track to be ordered separately)	**404.24.901**	3000 mm	

Description	Article No.
Track width 1500 with 2 panels	
Fitting Set **Classic IF 50 (Slyde 50)** Kit with Extruded Aluminium Top Track for **2 Doors** 3000 mm Track - 2 Pcs. Each	**401.29.006**
Consisting of	
Fitting Set **Classic IF 50 (Slyde 50)** Kit for **1 Door** - 2 sets	**404.24.000**
Extruded Aluminium Top Track Profile - 3000 mm- 2 Pcs.	**404.24.901**
Track width 2000 with 2 panels	
Fitting Set **Classic IF 50 (Slyde 50)** Kit with Extruded Aluminium Top Track for **2 Doors** 3000 mm Track - 3 Pcs. Each	**401.29.007**
Consisting of	
Fitting Set **Classic IF 50 (Slyde 50)** Kit for **1 Door** - 2 sets	**404.24.000**
Extruded Aluminium Top Track Profile - 3000 mm- 3 Pcs.	**404.24.901**
Track width 2000 with 3 panels	
Fitting Set **Classic IF 50 (Slyde 50)** Kit with Extruded Aluminium Top Track for **3 Doors** 3000 mm Track - 3 Pcs. Each	**401.29.008**
Consisting of	
Fitting Set **Classic IF 50 (Slyde 50)** Kit for **1 Door** - 3 sets	**404.24.000**
Extruded Aluminium Top Track Profile - 3000 mm- 3 Pcs.	**404.24.901**

Special Order

Stock Available

Classic IF 50

Section: A, B, C, D, E : TOP AND BOTTOM COMMON TRACK

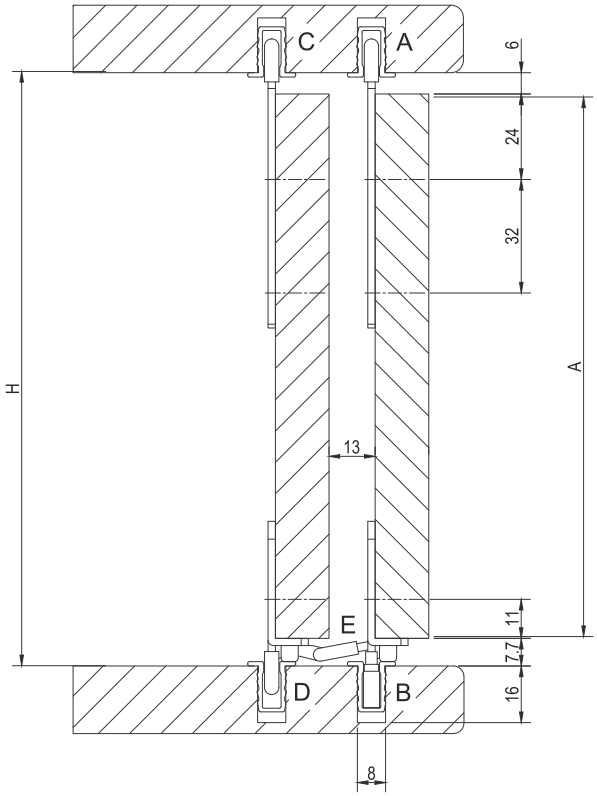

A = H - 14.7

Special Order

Stock Available

Classic 50 VF SR (ST-18)

NEW

Vorfront sliding system for wooden wardrobe and furniture doors.

Hardware Specification:

- Smooth and effortless Sliding Doors.
- Easy Installation.
- Suitable for 2 door and 3 door applications

Note: If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Special Order

Stock Available

Classic 50 VF SR (ST-18)

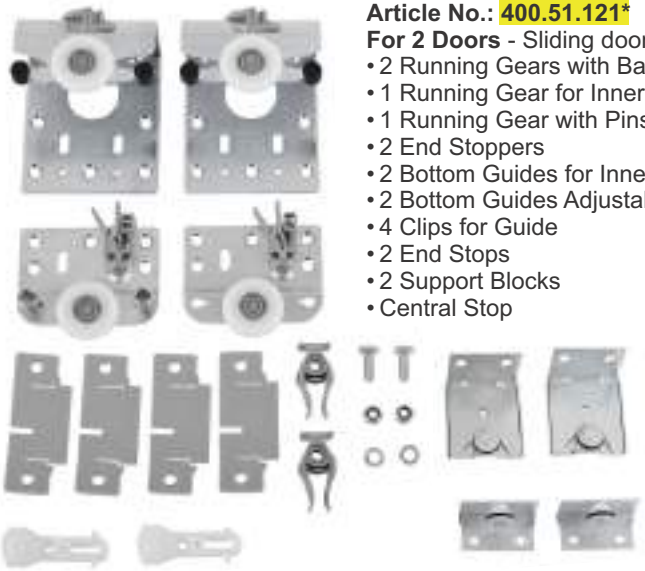

Article No.: 400.51.121*
For 2 Doors - Sliding door kit consists of
- 2 Running Gears with Ball Bearing
- 1 Running Gear for Inner Door
- 1 Running Gear with Pins
- 2 End Stoppers
- 2 Bottom Guides for Inner Door
- 2 Bottom Guides Adjustable
- 4 Clips for Guide
- 2 End Stops
- 2 Support Blocks
- Central Stop

Article No.: 400.51.123*
For 3 Doors - Sliding door kit consists of
- 2 Running Gears with Ball Bearing
- 2 Running Gears for Inner Door
- 2 Running Gears with Pins
- 2 End Stoppers
- 4 Bottom Guides for Inner Door
- 2 Bottom Guides Adjustable
- 6 Clips for Guide
- 2 End Stops
- 2 Support Blocks
- 1 Central Stop

*2 Door Alternate Article No.: 400.51.167 for 400.51.121 (Applicable soon)
*3 Door Alternate Article No.: 400.51.168 for 400.51.123 (Applicable soon)

Special Order

Stock Available

Classic 50 VF SR (ST-18)

Product Name	Article No.	L mm	
Silver Anodized Aluminium Top Track (Note: Track to be ordered separately)	**400.52.026**	2500 mm	
	400.52.036	3500 mm	
Silver Anodized Aluminium Bottom Track (Note: Track to be ordered separately)	**400.52.952**	2500 mm	
	400.52.953	3500 mm	

BOM LIST	
Description	**Article No.**
Classic 50 VF (ST-18) with 2.5 m track	**401.29.011**
Classic 50 VF (ST-18) with 3.5 m track	**401.29.012**

For 3 Doors: Order to be based on specifications and needs of the customer.

Section View:
Installation dimensions with roller runner

A = Door height (Calculation: A = IH + N + 23.5 mm)
IH = Internal cabinet height + Top panel thickness
N = Cabinet base panel thickness

Special Order

Stock Available

Classic 50 VF SR (ST-18)

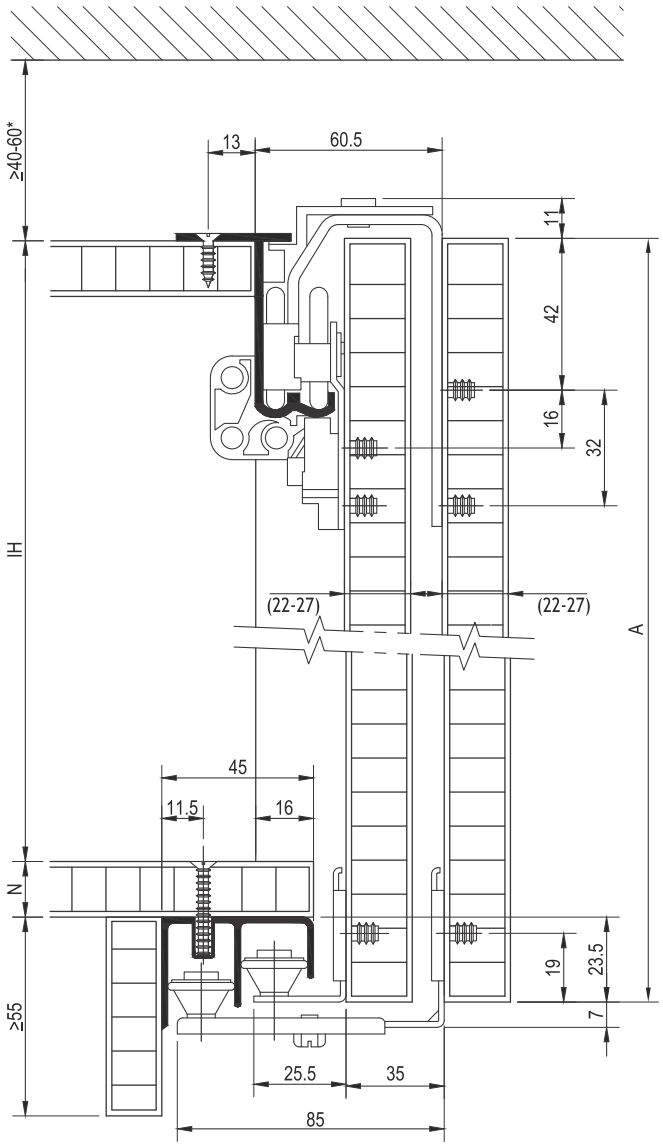

Special Order

Stock Available

Classic 80 W



Straight sliding system for wooden doors.

Hardware Specification:

- Ideal for dividers and internal doors
- An elegantly designed top quality system
- Concealed lower guide
- Rollers come with an elastic system for absorbing the irregularities of profile (If any)
- High quality Zamak aluminium body
- Proven smooth and silent rolling, thanks to our special anti-dust ball bearing system
- Rollers for long lasting rolling durability

Special Order

Stock Available

Classic 80 W

Article No.: 409.79.020
Sliding door kit consists of
- 2 Rollers with Bracket
- 1 Bottom Guide
- 2 Adjustable Stoppers and other fittings

Note: If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Product Name	Article No.	L mm	
Aluminium anodized top track	**409.50.602**	2100 mm	
Aluminium anodized top track	**941.27.432**	3000 mm	

OPTIONAL

Product Name	Article No.	Thickness	
Mounting bracket	**940.66.060**	3 mm	

Special Order

Stock Available

Classic 80 W

BOM LIST	
Description	**Article No.**
Classic 80 W with 2.1 m track	**940.99.304**
Classic 80 W with 3 m track	**940.99.305**

Section View:

Wall Mounting

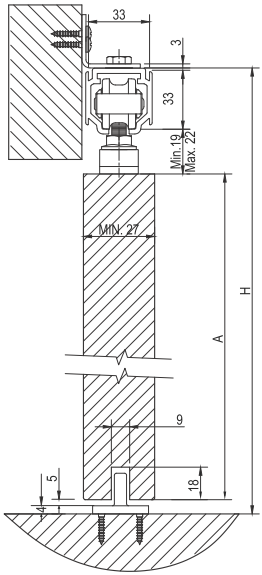

Ceiling Mounting

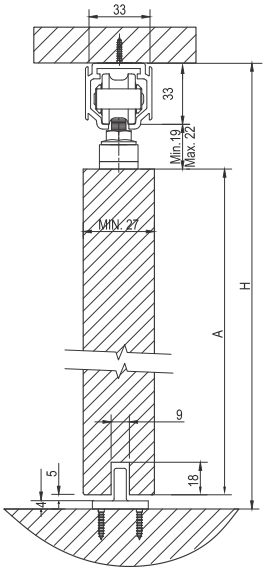

Door Height (A) = Total Height Clearance (H) - [Track Height (Non Concealed) + Desired Gap (Top+ Bottom)]

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

Classic 60 W SMUSO

NEW



Straight sliding system with soft close for wooden doors

Special Order

Stock Available

Classic 60 W SMUSO

Hardware Specification:

- Highly efficient Double-sided Soft Close technology embedded into the track
- Good quality Zamak (zinc alloy) roller, hanger and carriage set body
- Ground shielded ball bearings around the wheel for silent and smooth sliding
- High tech two-way suspension brackets made of zink coated steel.
  The suspension screw can be inserted from the front or the side for easy installation
- Open structure of the rail – prevents dust accumulation
- Compact form of stopper does not afflict the roller wheels – so the wheels do not get damaged when the roller set hits the stopper
- Adjustable bottom (up to 2 mm towards the left or right) for perfect alignment

Article No.: 941.10.026

Sliding door kit consists of:

- Rollers
- Adjustable Stopper
- Bottom Guide
- Two-way Suspension Brackets
- 2 Single–Sided Smuso
- Fixing Accessories
- Instruction Manual

Product Name	Article No.	L mm	
Top Track	409.50.603	2000 mm	
	409.50.604	2400 mm	
	409.50.605	3000 mm	
	409.50.606	3600 mm	

Special Order

Stock Available

Classic 60 W SMUSO

Section View
Wall Mounting

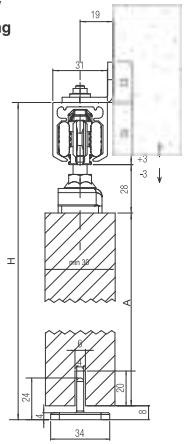

Ceiling Mounting



Door Height (A) = Total Height Clearance (H) - [Track Height (Non Concealed) + Desired Gap (Top+ Bottom)]

Elevation View

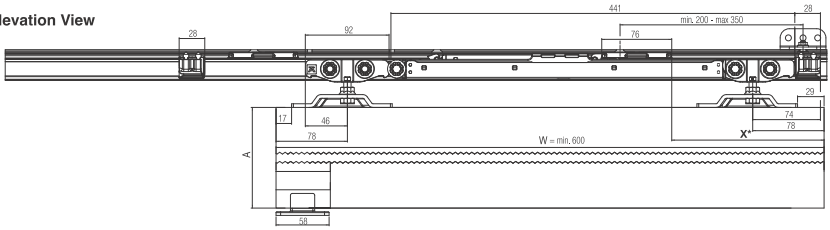

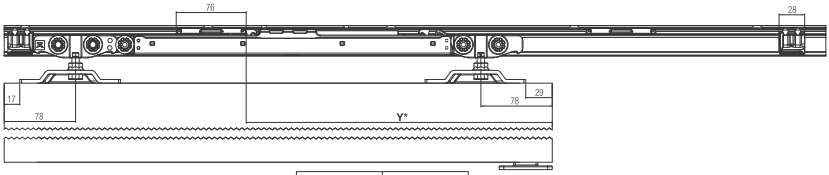

0-100 kg	≥ 100 kg
X* = 166	X* = 151
Y* = 334	Y* = 349

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

Design Ergo 80 NEW



Straight sliding system for glass doors.

Special Order

Stock Available

Design Ergo 80

Hardware Specification:

- Ideal for dividers and internal doors
- An elegantly designed top quality system
- Concealed lower guide
- Rollers come with an elastic system for absorbing the irregularities of profile (If any)
- High quality Zamak aluminium body
- Proven smooth and silent rolling, thanks to our special anti dust ball bearing system
- Rollers for long lasting rolling durability

Glass Clamp Specification:

- Material: Ss304
- Finish: Silver Polish
- Glass thickness: 10/12 mm
- Adjustable Plastic bottom guide

Article No.: 941.10.037

Sliding door kit consists of:

- 2 Rollers with Bracket
- 1 Bottom Guide
- 2 Adjustable Stoppers and other fittings
- 2 Glass Clamps
- 4 Seals

Special Order

Stock Available

Design Ergo 80

Product Name	Article No.	L mm	
Aluminium anodized top track	**409.50.602**	2100 mm	
Aluminium anodized top track	**941.27.432**	3000 mm	

OPTIONAL

Product Name	Article No.	Thickness	
Ergo Sliding Patch-22mm diameter Finish: SS Polished, SS 304	**941.10.101**		
Mounting bracket	**940.66.060**	3 mm	

Special Order

Stock Available

Design Ergo 80

Section View:

Wall Mounted

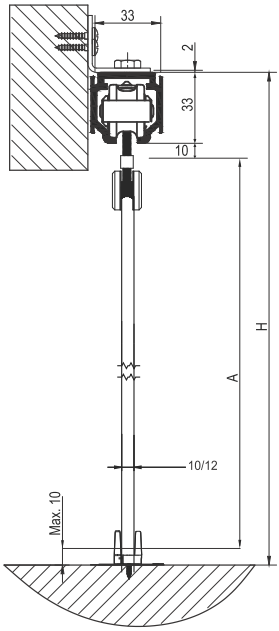

Ceiling Mounted

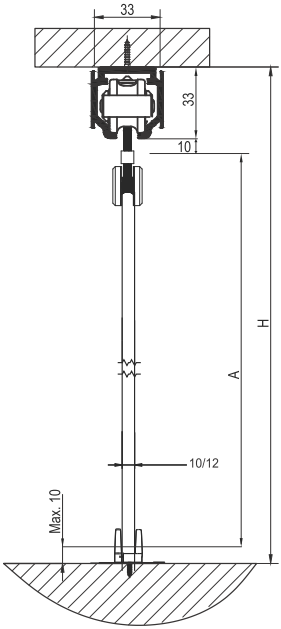

A= H- 53

Cut-out Dimensions:

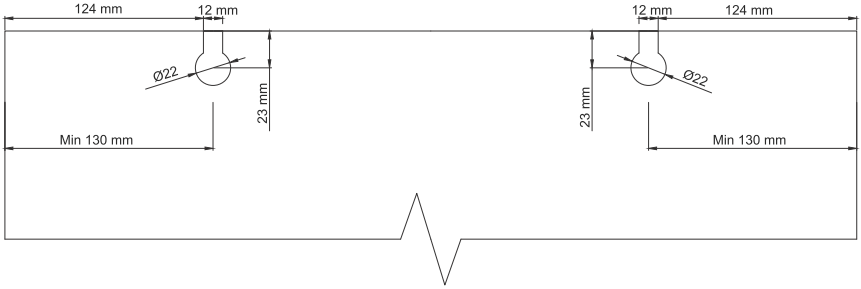

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

ECHO Sliding Door System

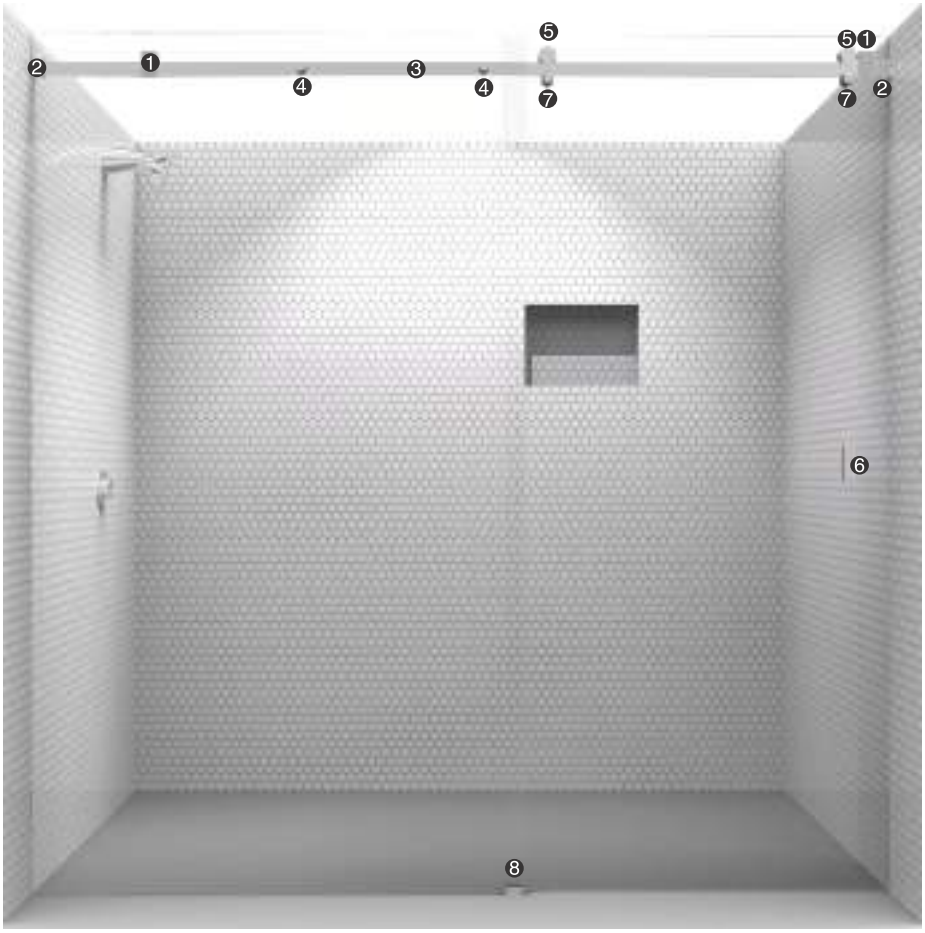

Special Order

Stock Available

Complete set of fittings without track

Finish	Article No.
SS Polish	981.20.314
SS Matt	981.20.315

Door Handle

Finish	Article No.
SS Polish	981.20.302
SS Matt	981.20.309

Roller

Finish	Article No.
SS Polish	981.20.300
SS Matt	981.20.307

Anti-Derail

Finish	Article No.
SS Polish	981.20.301
SS Matt	981.20.308

Track Support

Finish	Article No.
SS Polish	981.20.316
SS Matt	981.20.318

Special Order

Stock Available

Roller Stopper

Finish	Article No.
SS Polish	981.20.303
SS Matt	981.20.310

Wall Support

Finish	Article No.
SS Polish	981.20.304
SS Matt	981.20.311

Floor Guide

Finish	Article No.
SS Polish	981.20.306
SS Matt	981.20.313

Track

Size	Finish	Article No.
30 x 2000mm	SS Polish	981.20.316
30 x 1600mm	SS Polish	981.20.317

Size	Finish	Article No.
30 x 2000mm	SS Matt	981.20.318
30 x 1600mm	SS Matt	981.20.319

Special Order

Stock Available

ECHO Sliding Door System

GLASS CUTOUT DETAILS 1.6 METER TRACK

* Cutout details not to scale

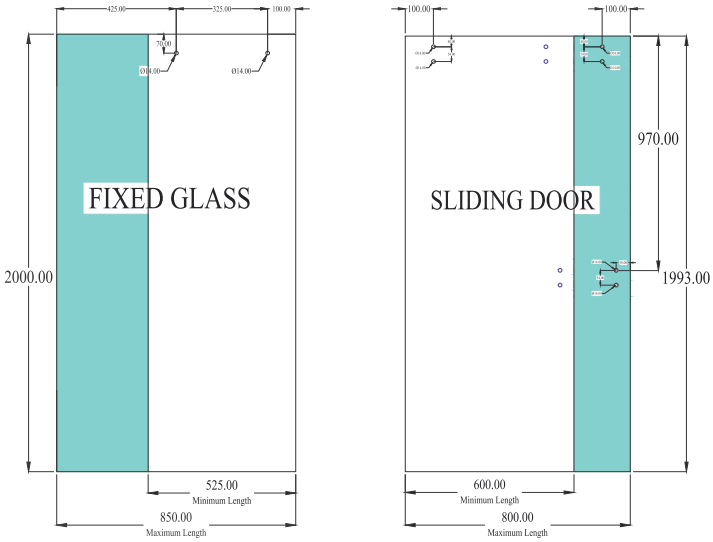

GLASS CUTOUT DETAILS 2 METER TRACK

* Cutout details not to scale

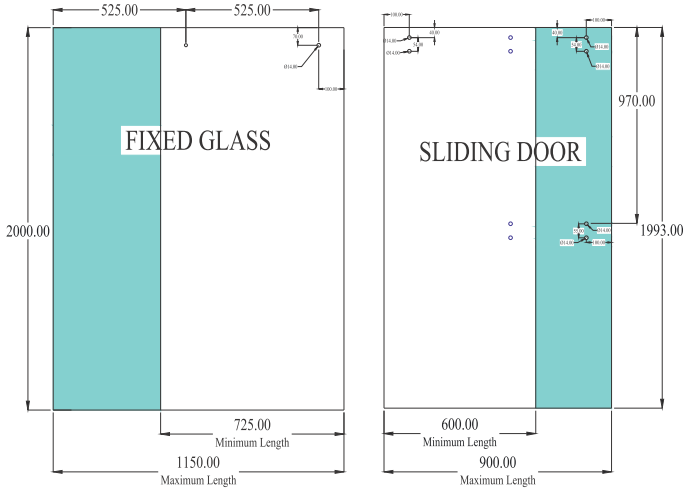

Note: The track has to be cut from the sliding end, as there is a pre drill on fixed side of the track.

Special Order

Stock Available

ECHO Sliding Door System

Ordering Information

Material Description	TYPE	QTY to be ordered	Article No.
Echo Shower Sliding System. 2 Rollers, 2 Anti De-rail, 2 Wall Supports, 2 Door Stop, 2 Track Supports, 1 Floor Guide & 1 Slide Pull Handle, **SS Polished**	Main Product	1	**981.20.314**
OR			
Echo Shower Sliding System. 2 Rollers, 2 Anti De-rail, 2 Wall Supports, 2 Door Stop, 2 Track Supports, 1 Floor Guide & 1 Slide Pull Handle, **SS Matt**	Main Product	1	**981.20.315**
Track			
Echo Rectangular Track, 30 x 2000, **SS Polished**	Track	1	**981.20.316**
Echo Rectangular Track, 30 x 1600, **SS Polished**	Track	1	**981.20.317**
OR			
Echo Rectangular Track, 30 x 2000, **SS Matt**	Track	1	**981.20.318**
Echo Rectangular Track, 30 x 1600, **SS Matt**	Track	1	**981.20.319**
Additional Articles to complete the installation			
Connectors			
Wall to Glass or Floor to Glass Bracket/ Connector, 8-12 mm, SS Polished	For fixed glass	2	**981.20.231**
Wall to Glass L Bracket/ Connector, 8-12 mm, SS Polished	For fixed glass	2	**981.20.241**
OR			
Wall to Glass or Floor to Glass Bracket/ Connector, 8-12 mm, SS Matt	For fixed glass	2	**981.20.230**
Wall to Glass L Bracket/ Connector, 8-12 mm, SS Matt	For fixed glass	2	**981.20.240**
Seals (to be ordered as per glass thickness used)			
Weather Seal for 8mm Glass used between Door & Side Panel opp. Hinge End, Size 2400mm	For sliding door		**950.50.403**
Weather Seal for 10mm Glass used between Door & Side Panel opp. Hinge End, Size 2400mm	For sliding door		**950.50.404**
Weather Seal for 12mm Glass used between Door & Side Panel opp. Hinge End, Size 2400mm	For sliding door		**950.50.405**
Sliding Door Seal For Fixed Panel, 8mm, 2400mm	Gap between fixed glass and door		**950.50.406**
Sliding Door Seal For Fixed Panel, 10mm, 2400mm			**950.50.407**
Sliding Door Seal For Fixed Panel, 12mm, 2400mm			**950.50.408**
Spares			
Echo Roller Ø 40 x 24 mm, SS Polished	Spares		**981.20.300**
Echo Anti De Rail 25 x 24 mm, SS Polished	Spares		**981.20.301**
Echo Sliding Door Handle 25 x 80 mm, SS Polished	Spares		**981.20.302**
Echo Sliding Roller Stopper 14 x 58 x 34 mm, SS Polished	Spares		**981.20.303**
Echo Sliding Wall Support 18 x 50 mm, SS Polished	Spares		**981.20.304**
Echo Sliding Rectangular Floor Guide 20 x 21 x 40 mm, SS Polished	Spares		**981.20.305**
Echo Sliding Track Support 20 x 10 mm, SS Polished	Spares		**981.20.306**
Echo Roller Ø 40 x 24 mm, SS Matt	Spares		**981.20.307**
Echo Anti De Rail 25 x 24 mm, SS Matt	Spares		**981.20.308**
Echo Sliding Door Handle 25 x 80 mm, SS Matt	Spares		**981.20.309**
Echo Sliding Roller Stopper 14 x 58 x 34 mm, SS Matt	Spares		**981.20.310**
Echo Sliding Wall Support 18 x 50 mm, SS Matt	Spares		**981.20.311**
Echo Sliding Rectangular Floor Guide 20 x 21 x 40 mm, SS Matt	Spares		**981.20.312**
Echo Sliding Track Support 20 x 10 mm, SS Matt	Spares		**981.20.313**

Special Order

Stock Available

Kitchen Fittings

Blum TANDEM Runner

PAGE 107

Cutlery Tray & Plate Organiser

PAGE 112-113

Detergent Rack Holder

PAGE 114

Waste Bins

PAGE 116

Mid Way System

PAGE 117

Plinth Fittings

PAGE 119

Corner Unit

PAGE 122

Aluminium Profile

PAGE 124

Blum TANDEM concealed runners with integrated BLUMOTION for wooden drawers

Brings perfect motion to wooden drawers and pull-outs

- Allows the rich finish of wood to be preserved in applications
- Ensures smooth running action even with heavily loaded drawers and pull-outs
- Easy to remove and clean due to its operational locking device

Special Order

Stock Available

Blum TANDEM concealed runners with integrated BLUMOTION for wooden drawers

Article No.	Description
423.53.727	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 270 mm - 30 kgs
423.53.730	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 300 mm - 30 kgs
423.53.735	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 350 mm - 30 kgs
423.53.740	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 400 mm - 30 kgs
423.53.745	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 450 mm - 30 kgs
423.53.750	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 500 mm - 30 kgs
423.53.755	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 550 mm - 30 kgs

Special Order

Stock Available

Blum TIP-ON for TANDEM

With TIP-ON for TANDEM, the new opening feature for drawer fronts without pulling, you get drawers that open with just a light touch. This is a great addition to the smooth running action of TANDEM runners.

Article No.	Description
423.53.275	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 270 mm - 30 kgs
423.53.300	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 300 mm - 30 kgs
423.53.355	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 350 mm - 30 kgs
423.53.408	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 400 mm - 30 kgs
423.53.453	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 450 mm - 30 kgs
423.53.506	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set Nominal length: 500 mm - 30 kgs
423.53.551	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 550 mm - 30 kgs
423.53.659	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 650 mm - 30 kgs

Special Order

Stock Available

Blum TIP-ON for TANDEM

Tandem Tip-on set

Side Stabilization kit

Front adjuster bracket

Semicircular shaft (optional for >600mm wide drawers).

Synchronisation - Pinion (optional for >600mm wide drawers) 2 per drawer

Special Order

Stock Available

Blum TIP-ON for TANDEM

Article No.	Description
423.53.061	TANDEM TIP -ON set for 30kg single extension runners
423.53.014	TANDEM single extension cut to size side stabilisation kit for a nominal length = 410mm and cabinet width = 1400mm
423.53.017	TANDEM single extension cut to size side stabilisation kit for a nominal length = 650mm and cabinet width = 1400mm
430.90.035	Front adjuster bracket
423.53.067	Synchronisation - Pinion
423.53.066	Semicircular Shaft

Special Order

Stock Available

Ergo-Fit Plastic Cutlery Organisers for Tandembox

Ergo-fit Smart

The Ergo-fit Smart cutlery organiser series grabs attention on account of its high level of convenience in providing storage space for all commonly used kitchen utensils.



Cutlery tray for 600mm



Cutlery tray for 900mm





Article No.	Description
556.72.528	Ergo-Fit, Smart Cutlery Tray for 600 mm Drawer Silver Grey
556.72.531	Ergo-Fit, Smart Cutlery Tray for 900 mm Drawer Silver Grey

Special Order

Stock Available

Ergo-Fit Plastic High-Fronted Organisers for Tandembox & Legrabox

Ergo-Fit EASYFlex

Wave goodbye to loud noises and say hello to better stability with Häfele's Ergo-fit EasyFlex Drawer Organisers. These organisers easily expand on all four sides to fit any kitchen drawer and help create multiple compartments within the drawers.

Ergo Fit -Frame Organiser

Article No.	Description
556.81.281	Ergo-Fit, Easyflex Frame Organiser, Alu Grey 237-335mm x 237-335mm x 119mm
556.81.482	Ergo-Fit, Easyflex Frame Organiser, Dark Grey 237-335mm x 237-335mm x 119mm

Special Order

Stock Available

Detergent Rack Holder

Hafele's new pull-out and storage systems add convenience and functionality to your kitchens. The new detergent storage systems from Hafele fit snugly into your under-sink cabinets and prove to be an ideal solution for storing detergents and other cleaning agents.

Bottom Mounted Detergent Pull-out:
This Detergent Pull-out is fixed on the base of the under-sink cabinet and comes with an integrated dampened self-closing technology. The mild steel wire baskets are chrome-plated and can carry weight loads up to 30 kgs. The frame and rails are grey-powder coated and perfectly complement the baskets in finish and elegance.

Bottom Mounted Detergent Rack

Special Order

Stock Available

Detergent Rack Holder

Specifications:
- Ideal for Cabinet width of 400 mm (minimum cabinet width: 300 mm)
- Load Carrying Capacity: 30 kgs
- Finish: Wire Basket: Chrome plated
- Frame: Grey-powder coated

Side Mounted Detergent Pull-out:
An alternate option to choose is the side-mounted detergent storage baskets.
These baskets can be fixed either on the left or right vertical of the under-sink cabinet with the help of fixing brackets. The mild steel wire baskets are chrome-plated and can carry weight loads up to 30 kgs. You can also choose to mount this system on runners and convert the application into a pull-out system (runners included).

Specifications:
- Ideal for Cabinet Width of 300 mm
- Load Carrying Capacity: 30 kgs
- Finish: Chrome plated

Side Mounted Detergent Rack

Article No.	Description
549.35.271	Bottom Mounted Detergent Rack for Cabinet Width of 400 mm 466 x 286 x 475
520.24.200	Side Mounted Detergent Rack for Cabinet width of 300MM 470 x 235 x 390

Special Order

Stock Available

Shutter Mounted Waste Bin

Shutter Mounted Waste Bins /
Sliding Mechanism Cap

Cabinet Width: 400mm
Capacity: 13 Ltr
Mechanism: Sliding System
Dimensions: W303 x D294 x H348mm
Material: Stainless Steel
Colour of Plastic: Metalic Gray
Box Content: 12

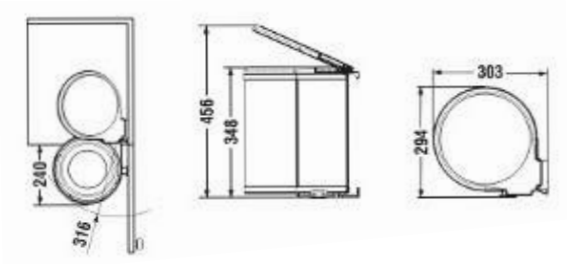

Article No.	Description
503.31.002	Shutter Mounted Waste Bins / Sliding Mechanism Cap

Special Order

Stock Available

Mid-Way Systems

New Midway Systems will help you multitask like a pro! These systems encompass functionality and practicality and can snugly fit into the space between the work top and wall units. You can efficiently store regularly used items on these systems rather than having to rummage the depths of a cabinet. These stylishly wired midway systems enable you to optimise your kitchen storage space and easily blend in with your kitchen aesthetics thanks to their popular, sleek chrome finish.

Specifications:
- Material: Mild Steel
- Finish: Chrome Plated

Special Order

Stock Available

Mid-Way Systems

Mid-Way System I
- Width: 705 mm
- Consists of:
- 2 x 342.5 mm chrome tube [15 (H) x15 mm (D)]
- 2 x end caps
- 1 x connecting bush
- 3 x wall fixings
- 3 x caps
- 1 x multipurpose rack (width: 325 mm)
- 1 x spice rack and kitchen roll holder (width 310 mm)

Mid-Way System II
- Width: 1500 mm
- Consists of:
- 2 x 750 mm chrome tube rails(ø 16 mm)
- 3 x rail supports
- 3 x wall fixings
- 2 x end caps
- 5 x hooks
- 1 x multipurpose rack (Width: 451 mm)
- 1 x 3 tier food wrap holder (Width: 325 mm)
- 1 x spice rack (Width: 355 mm)
- 1 x connecting bush

Article No.	Description
522.48.203	Mid-Way System I, H200x W705x D150
522.48.202	Mid-Way System II, H350x W1500x D170

Special Order

Stock Available

Plinth Fittings And Accessories

Skirting Panels: Plinth Fittings Range

They are available in two heights of 100 mm and 150 mm.

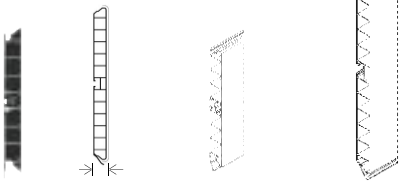

Special Order

Stock Available

Plinth Fittings And Accessories

Skirting Panels

Specifications:
- Length 3000 mm
- Thickness 12 mm

Article No.	Finish
713.55.323	Dark Bronze

- Height : 100 mm

Article No.	Finish
713.57.323	Dark Bronze

- Height : 150 mm

Adjustable Angle Connector

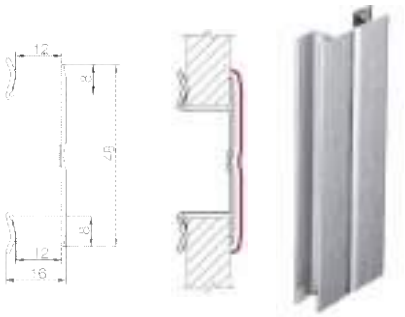

Article No.	Finish
713.55.330	Dark Bronze

- Height : 100 mm

Article No.	Finish
713.57.330	Dark Bronze

- Height : 150 mm

Special Order

90° Two Side Connector

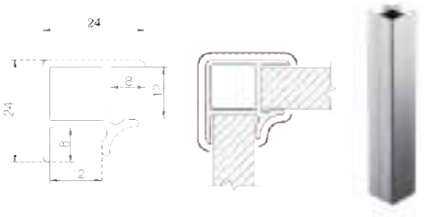

The 90° Two Side Connector (finish on both sides) joins two Skirting Panels at a standard right angle.

Article No.	Finish
713.55.360	Dark Bronze

- Height : 100 mm

Article No.	Finish
713.57.360	Dark Bronze

- Height : 150 mm

Standard Clip

Article No.	Finish
637.87.330	Black

- Material: Metal

Stock Available

Plinth Leg With Round Base





- Material: Thermoplastic
- Weight Bearing Capacity 200 kg / leg

Article No.	Finish
637.29.751	Black

- Height : 100 mm

Article No.	Finish
637.29.730	Black

- Height : 150 mm

Special Order

Stock Available

Kitchen Corner Unit

Fits exactly into every kitchen Corner Unit

A timeless design, robust technology and an unrivaled variety of shape and size options means that eco is already a classic for kitchen corners. The compact construction allows simple and precise fitting in any corner cabinet and offers a cost effective solution for symmetrical or asymmetrical layouts.

Special Order

Stock Available

Kitchen Corner Unit

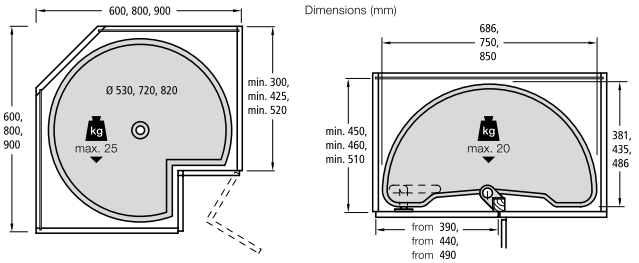

Corner Unit trays for symmetrical and asymmetrical corner cabinets
– Optimum use of the storage space in every kitchen corner
– Easy access to the stored items thanks to extractable or revolving trays
– High load capacity thanks to solid underside ribbing
– Wide fitting range available for all established cabinet heights and different corner conditions
– Compatible with the mondo corner cabinet system

Finishes
– Shape: Semi circle, ¾ circle,
– Colours: Aluminium grey, White
– Fitting: Tube fitting (incl. catch), Brake fitting (synchronously rotating trays)

Article No. White	**Article No.** Aluminium grey	**Description**	**Cabinet Width**
541.54.860	**541.54.360**	Set including 2 half trays 750 mm	900 mm
	541.54.350	Set including 2 half trays 686 mm	800 mm
541.40.870	**541.40.370**	Set including 2 trays 3/4 circle 720 mm	800 x 800 mm
541.40.880	**541.40.380**	Set including 2 trays 3/4 circle 820 mm	900 x 900 mm

Special Order

Stock Available

Wide Aluminium Profiles for Kitchen Shutters

With the changing trend from wooden shutters to aluminum profile shutters, here is the new range of Hafele wide aluminum profiles. These profiles are available in four trendy finishes of silver anodized, stainless steel hairline, silver polished and champagne brushed. The profiles come in length of 3 meters, which can be cut to size as per the requirement. The profiles can be installed with 4 mm glass using the transparent plastic sleeve. For rigidity and long life, the profiles are connected with steel corner connectors. These profiles are easy to clean and install.

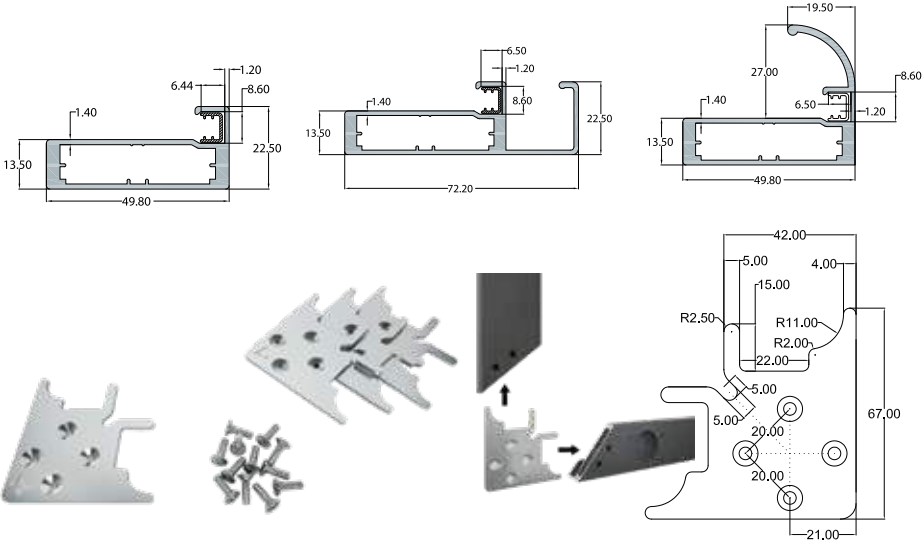

Special Order

Stock Available

Wide Aluminium Profiles for Kitchen Shutters

Article No.	Description
563.47.903	Aluminium frame profile, Finish: Silver Anodized, Dimension: 3000 (L) x 50 (W)x 22 (H) mm
563.47.003	Aluminium frame profile, Finish: S. S. Hairline, Dimension: 3000 (L) x 50 (W)x 22 (H) mm
563.47.103	Aluminium frame profile, Finish: Silver Polished, Dimension: 3000 (L) x 50 (W)x 22 (H) mm
563.47.803	Aluminium frame profile, Finish: Anodized Brushed Champagne, Dimension: 3000 (L) x 50 (W)x 22 (H) mm
563.47.913	Aluminium frame profile with Handle, Finish: Silver Anodized, Dimension: 3000 (L) x 72 (W)x 22 (H) mm
563.47.013	Aluminium frame profile with Handle, Finish: S. S. Hairline, Dimension: 3000 (L) x 72 (W)x 22 (H) mm
563.47.113	Aluminium frame profile with Handle, Finish: Silver Polished, Dimension: 3000 (L) x 72 (W)x 22 (H) mm
563.47.813	Aluminium frame profile with Handle, Finish: Anodized Brushed Champagne, Dimension: 3000 (L) x 72 (W)x 22 (H) mm
563.47.923	Aluminium frame profile with Handle, Finish: Silver Anodized, Dimension: 3000 (L) x 50 (W)x 40 (H) mm
563.47.023	Aluminium frame profile with Handle, Finish: S. S. Hairline, Dimension: 3000 (L) x 50 (W)x 40 (H) mm
563.47.123	Aluminium frame profile with Handle, Finish: Silver Polished, Dimension: 3000 (L) x 50 (W)x 40 (H) mm
563.47.823	Aluminium frame profile with Handle, Finish: Anodized Brushed Champagne, Dimension: 3000 (L) x 50 (W)x 40 (H) mm
563.47.990	Corner connector for 50mm wide aluminum profile compatible for hinge & mounting plate drilling (4 corner connectors & 16 mmx10mm machine thread screws, Finish: Zinc Galvanised, Dimension: 67 (L) x 67 (W)x 2.5 (H) mm

Special Order

Stock Available

Mumbai Design Centre:
Haji Moosa Patrawala Ind.(SOBO)
Estate, Near Famous Studio,
Mahalaxmi (West),
Mumbai - 400 011.
Tel.: 022 6264 7100.

Mumbai Design Centre:
#2 Filix Building, Opp. Asian Paints,
L.B.S. Marg, Bhandup (West),
Mumbai - 400 078.
Tel.: 022 2596 9660/
2596 9787/2594 7305

New Delhi Design Centre:
D-89 , Ist Floor, Okhla Phase-I,
New Delhi - 110 020.
Tel.: 011-66574999 •
Fax: 011-41605482.

Bangalore Design Centre:
No. 2/1, "Shiv Manor",
Langford Road, Shanthi Nagar,
Bangalore – 560 027.
Tel.: 080 4132 6116 •
Fax: 080 4132 6226.

Hyderabad Design Centre:
SJR Building - # 1-57/89/1 &
1-57/89/2, Opp Allahabad Bank,
Gachibowli, Hyderabad - 500032
Tel.: 040 29557578 •

Kolkata Design Centre:
PS PACE, Premises No. 1/1A,
Mahendra Roy Lane, Topsia,
Kolkata - 700 046.
Tel.: 033 40086814 / 40089268
Fax: 033 24988020.

Chennai Design Centre:
First Floor No.24, College Road,
Nungambakkam, Chennai 600 006.
Tel.: 044 - 4215 1542 •
Fax: 044 2446 0922.

Pune Design Centre:
Showroom no. 2, Ground floor,
F P no. 403, A/2, ICC Trade tower,
Senapati Bapat Marg, Shivaji Nagar,
Pune -411016
Tel.: 020 2563 3301
Fax: 020 2563 3302

Pune Office:
Office No. 12, Vastushree Complex,
Survey No.587,
Near Hyde Park, Gultekdi,
Market Yard, Pune - 411 037.
Tel.: 020 2426 6264
Fax: 020 2426 6274.

Ahmedabad Office:
Hafele India Pvt. Ltd., Office No.
302, Third Floor, Shangrila Arcade,
Near Shyamal Cross Road, Satellite,
Ahmedabad - 380015.
Phone: +91 79695 55505 /
8866220505.

Sri Lanka:
Hafele Design Centre:
448, Galle Road, Rawathawatta,
Moratuwa, Sri Lanka.
Tel: +94 112 644 600.

Hafele Design Centre:
52, Nandana Gardens
(On Duplication Road),
Colombo 04.
Tel: +94 112 500 501.
Fax: 0094 112 500 553.
Hafele Boutique:
747A, Sirimawo Bandaranayaka
Mawatha, Mulgampola,
Kandy, Sri Lanka.
Tel: +94 812 223 338.

Bangladesh Office:
2nd Floor, House – 181, Road – 2,
Mohakhali DOHS, Dhaka – 1206.
Phone – 01844018431/
01844018432/ 01844018433/
01844018437.

Bangladesh Design Center:
House – 106, Road – 12,
Block – E, Banani, Dhaka – 1213
Phone – 02-48810380-81

Nepal:
Monika Home Decor
Kathmandu Plaza, Kamaldhi,
Kathmandu, Nepal
Tel.: 00 9851 030 556 /
00 977 9818496082 / 9851030556

Bhutan:
S C & K Marketing and Sales
First Floor, Hotel 89 Building
Chorten Lam, Thimphu, BHUTAN
Tel.: 975 2 333419 / 77114228 /
17600663

HÄFELE

Mumbai Corporate Office:
Office No. 3, Building “A”, BETA,
I Think Techno Campus, Off J.V.L.R,
Opp. Kanjurmarg East, Mumbai – 400 042.
Tel.: 022 6142 6100 I Fax: 022 6702 0531.

For Enquiries SMS “HAFELE” to 56070
Toll Free Customer Care: 1800 266 6667
Customer Care WhatsApp: +91 97691 11122
customercare@hafeleindia.com
info@hafeleindia.com

Follow us on

Distribution_Vol 1_10/07/2020