

Distribution Channel

**The**

---

**Complete**

---

**Häfele**

---

**Compact**





# Introduction

Dear Customer,

We are happy to present to you the very first edition of a fully exclusive product catalogue for our Distribution Channel. As you can see it comes in a handy format and is structured clearly so that you can find the fitting you are looking for easier and faster. You will find all the products across different categories in this new catalogue - the majority of which are available in our Logistics & Distribution Centres located in different parts of South Asia. These are attractive, hard wearing and reliable products which will perform their function well for many years to come - we guarantee it!

The Furniture and Hardware Industry has grown rapidly in the last few years in India. We at Häfele have understood the growing needs of the industry and have taken up the challenge to be the best suppliers of quality fittings and accessories, which are not only aesthetically beautiful but give our customers the functionality that they need.

Häfele India has grown beyond our wildest dreams with regional offices and design showrooms in all major metros in India. The company also has an established presence in Sri Lanka and Bangladesh by way of

branch offices and Design Showrooms; and runs operations in other regions of South Asia like Bhutan, Nepal and Maldives. Our employee base has only multiplied in the last few years with a competent sales presence across South Asia. We will continue to grow our team in the coming years to provide better and more services to our customers.

So please enjoy this handy guide for quality hardware fittings and let us have any recommendations in regard to products which you want us to add or any other improvements you would like to see in the services we provide.

As always the HÄFELE Team is looking forward to being at your service.

Warmest regards

Jürgen Wolf  
Managing Director  
Häfele South Asia

# Hafele Reassuring Expertise



"For over 9 decades, we've been helping people make more of their homes.

Established in Germany, and now operating worldwide, we specialise in the fittings, hardware and systems that improve the way your home, works. So when you choose our products as part of your new or reformed home, you know you're getting the benefit of extensive knowledge and decades of experience.

And we're still a family business, owned and managed by family members who really care about the products and service we provide. You can rely on our commitment to the highest standards of quality and reliability, founded on a long tradition of German engineering where attention to detail is second nature.

All our home improvement ideas are built to last – day in, day out – we want you to get the very best from every corner of your home, for many years to come."



# Hafele Worldwide



With its origin in 1923 in a small town named 'Nagold' from the Swabian region of Germany that nurses a passion for hardware technology, it is no surprise that Häfele has lived up to its roots through a successful presence in the architectural and furniture hardware industry for over 9 decades now. Today, Häfele's worldwide penetration includes 38 subsidiaries across Europe, America, Asia, Australia and New Zealand. With these subsidiaries and numerous other sales organisations, Häfele operates in over 150 countries. The Häfele headquarters, 4 manufacturing units and 10 sales offices are located within Germany; while 1 manufacturing unit is located at Budapest, Hungary. The company also owns one of the largest and most sophisticated warehouses in its home country. The Häfele worldwide workforce is empowered by a base of over 8100 employees.

The group services over 150,000 customers across the globe through its extensive range of hardware products and a comprehensive logistics system. In addition to this, Häfele also provides consultative services to its customers, educating and advising them about buying the correct hardware as per their requirements. With this level of market penetration and ability to handle worldwide demand, it comes as no surprise that the company is an authority in the segment of home interior solutions; what is pleasantly surprising, though, is that in spite of its size, Häfele still remains a family owned and run business with a unique, friendly and value-centric work culture which is strongly followed among all its subsidiaries.

## About Häfele India



Häfele India is a wholly-owned subsidiary of the Häfele Global network and has been operating in India since 2003 under the leadership of Mr. Jürgen Wolf (Managing Director). The ability of the company to understand the diverse Indian market has made it an authority in the field of architectural hardware, furniture and kitchen fittings and accessories. The company also has a strong presence in synergized product categories namely Home Appliances, Furniture Lighting, Sanitary and Surfaces catering to the focused demand from these industries.




The subsidiary has a strong nation-wide presence with offices in Mumbai, Pune, Ahmedabad, Bangalore, Chennai, Hyderabad, Delhi, Kolkata and Cochin. It has full-scale operations in Sri Lanka and Bangladesh with Regional offices and Design Showrooms in both the countries; and has also spread its operations to other

regions of South Asia including Nepal, Bhutan and Maldives.

Häfele's design showrooms are hubs of international home interior trends and cutting edge designs presented in a world-class environment, where customers can see home solutions in their inherent applications. These showrooms function as a one-stop-shop for all home interior and improvement needs - from providing in-depth technical advice to kitchen and wardrobe designing services through a team of experts stationed at the showroom.

Häfele India services its customers with a base of over 1300 employees, a well-networked Franchise base of over 130 shops along with over 1000 dealers situated across South Asia. The subsidiary has a sophisticated Logistics centre in Mumbai along with distribution centres in Delhi, Bangalore, Kolkata and Colombo respectively.

# One Stop Shop

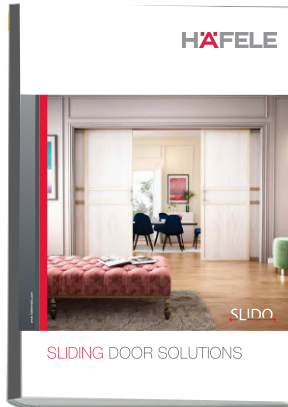

Amidst the chaotic yet fast growing hardware market; Häfele stands apart as a complete solution provider and not just a brand that sells hardware. We introduced related product segments like lighting, appliances, bathroom fittings and home surfaces to our customers so that they could get everything from one source and at their expected standards of quality and functionality. Today, these are established product verticals that are contributing to our Brand image of a "complete solution provider" by each passing day.

This proposition of being a "complete solution provider" is strongly backed by our service-oriented approach which includes anything from designing (in case of kitchens and wardrobes) to technical advice, hardware scheduling, training, warranties and most importantly after-sales support. This allows us to walk the length of the entire project duration by aiding and supporting our customers at every stage. We can execute the most abstract solutions in any interior space by integrating functionality with cutting-edge designs, ably backed by our unified service network to ensure continued support.

## CONTENTS

### Architectural Hardware

---

PAGE



9-25

---

### Furniture Fittings

---

PAGE



26-90

---

### Sliding Fittings

---

PAGE



91-139

---

### Kitchen Fittings

---

PAGE



140-156

---



# Architectural Hardware

## Door Closers

PAGE 11



## Lever Handles

PAGE 15



## Pull Handles

PAGE 18



## Hinges

PAGE 19



## Mortise Locks

PAGE 20



## Euro Profiles Cylinder

PAGE 22



## Door Accessories

PAGE 23





## Door Closers

### HS 1100 Surface Mounted EN 2 - 4 Door Closer



#### Technical Data :

- Adjustable Size : 2-4 for Doors with Width from 850mm to 1000mm and Weight from 45kg to 80kg
- Finish:** Silver

Article No.	Description
931.84.749	HS 1100 with Standard Arm
931.84.759	HS 1100 with Hold-Open Arm

### DCL-30 Concealed Door Closer



- Door Weight Max.: 80 kg.
- Door Width: 950-1100 mm
- Min. Door Thickness : 40 mm
- Closing Force EN 4
- Material and Finish: Aluminium
- Opening Angle Max.: 120°
- Hold Open Angle: 90°
- Adjustable Closing and Latching Speeds:
  - Closing Speed: 120° - 15°
  - Latching Speed: 15° - 0°
- Application: Wooden and Metal-framed doors
- Compatible: DIN Left and Right
- Installation: Door and Transom Mount
- Cycle Testing: 5,00,000 Cycles

Article No.	931.84.921
-------------	------------

### DCL 15 Surface Mounted EN 2 - 4 Door Closer



CE Marked Fire tested  
EN 1154:1996 + A1:2002

#### Technical Data :

- 500,000 Cycle Tested
- Closing Force complying with EN 1154 2 - 4
- Max. Door Leaf Width 1100mm
- Max. Door Opening Angle approx. 180°
- Max. Door Leaf Weight 80 kg
- **Finish:** Aluminium

Article No.	Description
931.84.629	With Standard Arm Assembly
931.84.639	With Hold-Open Arm

### DIY78 Surface Mounted



CE Marked Fire tested

#### Technical Data

- 5,00,000 Cycle Tested
- Closing Force Compliant with EN 1154 2-4
- Max Door Leaf Width 1100mm
- Max Door Opening Angle - Approx. 180°
- Max Door Leaf Weight - 80kg
- **Finish:** Aluminium

Article No.	Description
499.30.002	With Standard Arm, Size 2/3/4, for up to 80 kg
499.30.003	With Hold Open Arm, Size 2/3/4, for up to 80 kg

**Note for hold open device:**The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available

Door Closer

DCL 21 Surface Slide Arm  
Door Closer



Technical Data

- 5,00,000 Cycle Tested
- Closing Force EN 2-4
- Max Door Leaf Width 1100mm
- Max Door Opening Angle - Approx. 180°
- Max Door Leaf Weight - 80kg
- **Finish:** Aluminium

Article No.	Description
931.84.129	With Hold Open

DCL 35  
CAM Efficient Concealed Door Closer



Features

- 10,00,000 Cycle Tested
- Closing Force Complying with EN 1154
- Size - 2-4
- Min. Door Thickness: 40mm
- Max Door Leaf Width: 1100mm
- Max Door Opening Angle: 120°
- Max Weight: 80 kg
- **Finish:** Aluminium

Article No.	Description
931.46.069	DCL 35 with Standard Arm
931.46.239	DCL 35 with Hold-open Arm

**Note for hold open device:**The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available



## Door Closer

### DCL 55

Surface Door Closer





- 5,00,000 Cycle Tested
- Size 2-6
- Door Weight: Max.120kg
- Door Width: Max.1400mm
- In Compliance with EN 1154:1996/a1:2002
- Max. Door Opening Angle Approx. 180°
- **Finish:** Aluminium

CE Marked  Fire tested

Article No.	Description
<b>931.84.769</b>	DCL 55 with Standard Arm
<b>931.84.819</b>	DCL 55 with Hold-open Arm

### DCL 71

CAM- Efficient Concealed Door Closer

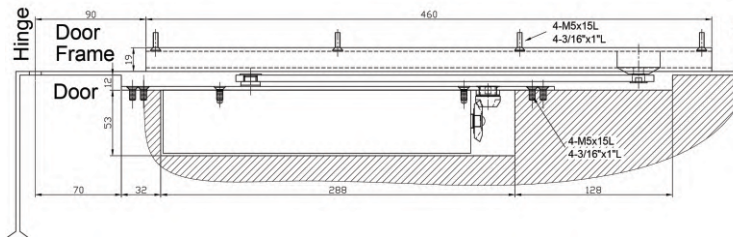

### Technical Data & Features

- Closing Force: Adjustable EN 2-5
- Opening Application: Non-handed
- Standard Door Width: Up to 1250 mm
- Maximum Door Weight: Up to 120 kg
- Closing Angle: 115°-15° (Adjustable by Valve)
- Latching Angle: 15°-0° (Adjustable by Valve)
- Maximum Door Opening Angle: Approx. 115°
- Min Door Thickness: 50 mm

Article No.	Description
<b>931.84.469</b>	Non Hold Open
<b>931.84.409</b>	With Hold Open


**Note for hold open device:** The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available

**Door Closer**

**DCL 70**  
**CAM-Efficient Concealed Door Closer**

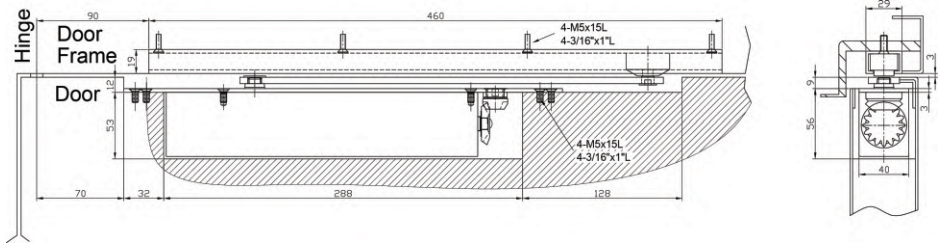

**Technical Data & Features**

- Closing Force: Adjustable EN 3-6
- Opening Application: Non-handed
- Standard Door Width: Up to 1400 mm
- Maximum Door Weight: Up to 150 kg
- Closing Angle: 115°-15° (Adjustable by Valve)
- Latching Angle: 15°-0° (Adjustable by Valve)
- Maximum Door Opening Angle: Approx. 115°
- Min Door Thickness: 55 mm

Article No.	Description
931.84.399	Non Hold Open
931.84.389	With Hold Open

**Note for hold open device:**The use of a hold open device on fire resistant and smoke control doors is not permitted.

Special Order

Stock Available

## Stainless Steel Lever Handles SS 304

### Features:

- Complies to EN 1906: 2010, Grade 2
- Suitable for fire resistant & smoke control doors
- Door thickness 38 - 55mm
- 100000 cycle tested

### Hollow Lever Handles

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.556	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.566	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.576	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.646	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.586	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.596	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.606	SS Matt

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.616	SS Matt

### Solid Lever Handles

Lever Handle on Rose & Cylinder Escutcheon



Article No.	Finish
903.92.686	SS Matt

Special Order

Stock Available

## Zinc Lever Handles

1 Year Surface Finish Warranty  
5 Years Operational Warranty

### ALPHA

Lever handle on Square Rose and Escutcheon



Article No.	Finish
901.79.843	Satin Nickel

### ZETA

Lever handle on Square Rose and Escutcheon



Article No.	Finish
901.79.851	Satin Nickel

### AVIOR

Lever handle on Square Rose and Escutcheon



Article No.	Finish
901.79.569	Satin Nickel
901.79.570	Antique Brass
901.79.571	Matt Black

### GAMMA

Lever handle on Square Rose and Escutcheon



Article No.	Finish
901.79.845	Satin Nickel

### BETA

Lever handle on Round Rose and Escutcheon



Article No.	Finish
901.79.853	Satin Nickel

### VEGA

Lever handle on round Rose and Escutcheon



Article No.	Finish
901.79.576	Satin Nickel / Chrome Plating
901.79.577	Chrome Plating / White
901.79.578	Chrome Plating / Black

### DELTA

Lever handle on Square Rose and Escutcheon



Article No.	Finish
901.79.847	Satin Nickel

### VEGA - COMBO

Lever handle Combiset with 8" long back plate with 60mm T/Turn EPC and 7" Mortise lock (Key and T/Turn)



Article No.	Finish
901.79.579	Satin Nickel / Chrome Plating

Special Order

Stock Available

## Zinc Lever Handles

1 Year Surface Finish Warranty  
5 Years Operational Warranty

### SPICA

Lever handle on Round Rose and Escutcheon



Article No.	Finish
901.79.584	Satin Nickel
901.79.585	Antique Brass
901.79.586	Chrome Plating
901.79.587	Matt Black

Special Order

### RIGEL

Lever handle on Round Rose and Escutcheon



Article No.	Finish
901.79.581	Satin Nickel / Chrome Plating
901.79.582	Silver Plating / White
901.79.583	Chrome Plating / Black

### ENIF

Lever handle on Square Rose and Escutcheon



Article No.	Finish
901.79.588	Satin Nickel
901.79.589	Antique Brass
901.79.590	Chrome Plating
901.79.591	Matt Black

Stock Available

## SS Pull Handles SS 304

Pull Handle Back to Back Fixing

Application: For glass & wooden doors

Max. Door Thickness: 55 mm, Glass cut out for fix bolt Ø13mm

Finish: SS Matt



Article No.	Size (mm)	Finish
903.11.470	25 Dia x 300 C/C x 325 O/A	SSM
903.11.471	25 Dia x 450 C/C x 475 O/A	SSM
903.11.472	25 Dia x 600 C/C x 625 O/A	SSM
903.11.480	25 Dia x 300 C/C x 325 O/A	SSM+SSP
903.11.481	25 Dia x 450 C/C x 475 O/A	SSM+SSP

## SS Pull Handles

Pull Handle Back to Back Fixing, Drilling Hole 13mm Ø for glass doors.

Application: For glass & wooden doors

Max. Door Thickness: 55 mm

Finish: SS Matt



Article No.	Size (mm)	Finish
903.11.450	25 Dia x 220 C/C x 300 O/A	SSM
903.11.451	25 Dia x 305 C/C x 450 O/A	SSM
903.11.452	25 Dia x 450 C/C x 600 O/A	SSM
903.11.491	32 Dia x 305 C/C x 450 O/A	SSM
903.11.460	25 Dia x 220 C/C x 300 O/A	SSM+SSP
903.11.461	25 Dia x 305 C/C x 450 O/A	SSM+SSP
903.11.462	25 Dia x 450 C/C x 600 O/A	SSM+SSP

Special Order

Stock Available

Hinges

Ball Bearing Butt Hinge



Features

- For Wooden Doors
- 2 High Performance Ball Bearings
- Suitable for DIN Left & DIN Right Hand

Technical Data

- Maximum Door Weight for 3 Hinges: 120 kg
- Knuckle Diameter 14mm
- Finish: SS Matt

Article No.	Sizes of Hinges	Timber Door	Metal Door	Square Corner
* 926.20.810	4"x3"x3 mm	•		•
926.32.110	3"x2.5"x2.5 mm	•		•
926.32.160	4"x3"x3 mm	•		•
926.32.280	5"x3"x3 mm	•		•
926.32.290	5"x3.5"x3 mm	•		•
* 926.20.811	5"x 3"x3 mm		•	•

\* Supplied Without Screws

Special Order

Stock Available

## Mortise Locks

Mortise Cylinder Lock, 55mm Backset, 24mm Forend, 72mm Centre to Centre



- Heavy Duty Springing
- Anti Corrosive Plating
- Double Throw Deadbolt
- Case Size: 84 x 165mm
- Stainless Steel Dead Bolt & Latch

Article No.	Finish
911.02.124	SS Matt

Mortise Cylinder Deadlock, 55mm Backset, 24mm Forend



- Anti Corrosive Plating
- Case Size: 84 x 95mm
- Stainless Steel Dead Bolt

Article No.	Finish
911.22.551	SS Matt

Mortise Cylinder Lock, 24mm Forend, 85mm Centre to Centre



Fire tested

- Heavy Duty Springing
- Anti Corrosive Plating
- Double Throw Deadbolt
- Case Size:
  - 74 x 170mm for 45mm BS
  - 89 x 170mm for 60mm BS
- Stainless Steel Dead Bolt & Latch

Article No.	Finish	Backset
911.02.165	SS Matt	45mm
911.02.161	SS Matt	60mm

## Sliding Mortise Locks



### Feature

- For Wooden Doors
- Prepared for Profile Cylinder
- With Hook Bolt
- Backset 50mm

Article No.	Finish
911.26.096	Nickel Plated

## Economic Series

### Mortise Locks

- For Flush Timber Doors
- Latch Operated with Lever Handle or Key Action
- Stainless Steel Forend
- Deadbolt 1-turn
- Reversible latch

### Technical data

- Lever follower 8mm, Split Spindle



Article No.	C to C	Backset
911.02.783	72 mm	55mm
911.25.381	85 mm	60mm
911.25.383	85 mm	45mm
<b>Multi Bolt</b>		
911.56.181	85 mm	60mm

Special Order


Stock Available



## Knob Lockset

### Knob Lockset for Entrance and Office Doors

Outside: Key Knob with Cylinder  
Inside: Knob with Push Button



Inside and Outside  
Knobs - SS 304

Strike Plate - SS  
Forend - SS  
Latch - Zinc Alloy with  
Stainless Steel Plating  
For flush Timber or steel doors  
Suitable for door  
thickness 30 - 45 mm  
Brass cylinder with 5 pin tumblers

Technical Data  
Backset - 60 mm  
Rosette Diameter - 75mm

Entrance Function -  
One Key and One Button

Privacy Function -  
Button and Coin Turn

Article No.	Discription
911.83.680	Entrance Function
911.83.681	Privacy Function

Special Order

## Rim Latch Locks

Secure Vertibolt Lock with  
Dimple Key, 5 Keys



Article No.	Door Thickness (mm)	Finish
911.58.250	30-85	Satin
911.58.251	30-85	Antique Brass

Hale Safety Latch Lock with  
Regular Key, 3 Keys



Article No.	Door Thickness (mm)	Finish
911.58.254*	30-85	Satin
911.58.255*	30-85	Antique Brass
911.58.245*	30-85	Satin
911.58.246*	30-85	Antique Brass

\* Inside Opening

\* Outside Opening

Gallant Premium Night Latch Lock  
with Dimple Key, 5 Keys



Article No.	Door Thickness (mm)	Finish
911.58.262	30-85	Satin
911.58.263	30-85	Antique Brass

Vigor Night Latch Lock with Knob  
on Inside with Regular Key, 3  
Keys



Article No.	Door Thickness (mm)	Finish
911.58.266	30-85	Satin
911.58.267	30-85	Antique Brass

Vigor Night Latch Lock with Knob  
on Inside with Dimple Key, 5 Keys



Article No.	Door Thickness (mm)	Finish
911.58.258	30-85	Satin
911.58.259	30-85	Antique Brass

Stock Available

## Euro Profile Cylinders

Euro Profile Double Cylinder,  
Keyed Different



• Master keyed Cylinder are  
available on request

Article No.	Finish	Size (mm)
916.96.006	Nickel Matt	63
916.96.016	Nickel Matt	71
916.96.026	Nickel Matt	80
916.96.036	Nickel Matt	90
916.96.046	Nickel Matt	100

Euro Profile Single Cylinder,  
Keyed Different (Key One Side)



• Master keyed Cylinder are  
available on request

Article No.	Finish	Size (mm)
916.96.106	Nickel Matt	40
916.96.116	Nickel Matt	45
916.96.126	Nickel Matt	50
916.96.136	Nickel Matt	55
916.96.146	Nickel Matt	60

Special Order

Euro Profile Single Cylinder with  
Thumb Turn (No Key)



Article No.	Finish	Size (mm)
916.96.206	Nickel Matt	40
916.96.216	Nickel Matt	45
916.96.226	Nickel Matt	50
916.96.236	Nickel Matt	55
916.96.246	Nickel Matt	60

Euro Profile Thumb Turn Cylinders,  
Keyed Different (Key Outside +  
Thumb Turn Inside)



• Master keyed Cylinder are  
available on request


Article No.	Finish	Size (mm)
916.96.306	Nickel Matt	60
916.96.316	Nickel Matt	71
916.96.326	Nickel Matt	80
916.96.336	Nickel Matt	90
916.96.346	Nickel Matt	100

Euro Profile Toilet Cylinder (No Key)  
Thumb Turn Inside + Emergency  
Release Outside)



Article No.	Finish	Size (mm)
916.96.406	Nickel Matt	60
916.96.416	Nickel Matt	71
916.96.426	Nickel Matt	80
916.96.436	Nickel Matt	90
916.96.446	Nickel Matt	100

**ECO Series**, Euro Profile Thumb  
Turn Cylinders, Keyed Different  
(Key Outside + Thumb Turn Inside)



• Master keyed Cylinder are  
available on request

Article No.	Finish	Size (mm)
916.96.521	Nickel Matt	63
916.96.523	Nickel Matt	71

Stock Available

## Door Accessories

### Wall Mounted Door Stopper SS 304



Article No.	Finish
937.13.530	SS Matt

### Door Viewer




Article No.	Finish
959.00.027	Satin Nickel (160°)
959.00.040	Satin Nickel (180°)
959.00.090	Satin Nickel (200°)

Special Order

Stock Available

Door Accessories

Kanone Brass Tower Bolts

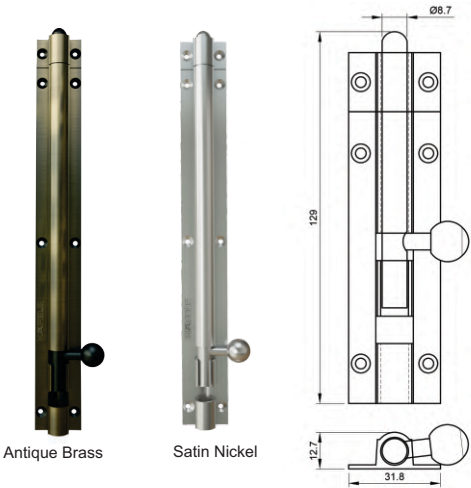

Specifications:

- Body: Brass
- Rod: Brass rod with a solid knob and a rod keeper
- Finish options: Antique Brass, Satin Nickel
- Size Options: 4", 6", 8", 10" & 12"
- Rod Diameter: 8.7 mm

Article No.	Size (Inches)	Finish
911.81.573	4"	Satin Nickel
911.81.575	4"	Antique Brass
911.81.576	6"	Satin Nickel
911.81.578	6"	Antique Brass
911.81.579	8"	Satin Nickel
911.81.581	8"	Antique Brass
911.81.582	10"	Satin Nickel
911.81.584	10"	Antique Brass
911.81.585	12"	Satin Nickel
911.81.587	12"	Antique Brass

Special Order


Stock Available

## Window Friction Hinges

### Standard Top Hung and Side Hung




Top Hung



Side Hung

#### Features:

- Manufacture from high grade austenitic SS304
- Composite Steel/Plastic slider for strength
- Durability and smooth operation
- Mainly used for light top projecting style domestic windows

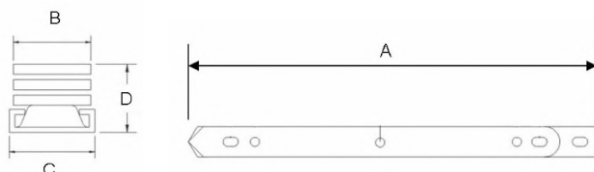

#### • Top Hung Windows

Article No.	Size	A mm	B mm	C mm	D mm/ Stack height	Max. width	Max. height	Max. weight	Open. Angle
972.05.001	203mm (8")	203	16	18	14	1200	350	11kg	60°
972.05.002	255mm (10")	255	16	18	14	1200	400	16kg	84°
972.05.003	305mm (12")	305	16	18	14.5	1200	550	18kg	85°
972.05.004	356mm (14")	356	16	18	15.5	1200	650	20kg	87°
972.05.015	406mm (16")	406	19	22	16	1200	750	40kg	87°
972.05.017	509mm (20")	509	19	22	16	1200	1000	45kg	42°
972.05.019	609mm (24")	609	19	22	16	1200	1200	50kg	45°

#### • Side Hung Windows

Article No.	Size	A mm	B mm	C mm	Dmm/ Stack height	Max. width	Max. height	Max. weight	Open. Angle
972.05.003	305mm (12")	305	16	18	14.5	600	1200	18kg	85°
972.05.004	356mm (14")	356	16	18	15.5	650	1200	20kg	87°
972.05.015	406mm (16")	406	19	22	16	700	1200	40kg	87°

Special Order

Stock Available



# Furniture Fittings

## Furniture Handles

PAGE 28



## Connectors

PAGE 33



## Hinges

PAGE 40



## Locks

PAGE 67



## Bed Fitting

PAGE 77



## Wardrobe Fittings

PAGE 78



## Drawer Runner

PAGE 84




## Table & Desk Fittings

PAGE 87



## Screws

PAGE 89



## Furniture Handles: Stainless Steel Matt

### 8 mm Round Bar Handle



Article No.	C to C
116.10.051	96 mm
116.10.052	128 mm
116.10.053	160 mm
116.10.055	224 mm
116.10.058	320 mm

### 10 mm Round Bar Handle



Article No.	C to C
117.40.051	96 mm
117.40.052	128 mm
117.40.053	160 mm
117.40.055	224 mm

### 10 mm Round Bar Handle



Article No.	C to C
115.77.051	96 mm
115.77.052	128 mm
115.77.053	160 mm
115.77.055	224 mm
115.77.058	320 mm

### 12 x 12 mm Square Handle & 6mm thickness



Article No.	C to C
100.68.001	96 mm
100.68.002	128 mm
100.68.003	160 mm
100.68.005	224 mm
100.68.008	320 mm

Special Order

Stock Available



## Furniture Handles (Stainless Steel 304)

### Furniture Handles: Stainless Steel Matt

#### 10 mm Round Bow Handle



Article No.	C to C
100.69.001	96 mm
100.69.002	128 mm
100.69.003	160 mm
100.69.005	224 mm

#### 10 x 10 mm Bow Handle



Article No.	C to C
100.55.001	96 mm
100.55.002	128 mm
100.55.003	160 mm
100.55.005	224 mm
100.55.008	320 mm

#### 10 mm Round Rail Bar Handle



Article No.	C to C
101.20.071	96 mm
101.20.072	128 mm
101.20.073	160 mm
101.20.075	224 mm
101.20.078	320 mm

#### 8 mm Round x 12 mm Square Pull Handle



Article No.	C to C
100.67.006	256 mm

#### 10 x 10 mm Furniture Handle Height : 24mm



Article No.	C to C
115.68.002	128mm
115.68.004	192mm
115.68.008	320mm
115.68.014	640mm

#### 25 x 12 mm Furniture Handle Height : 40mm



Article No.	C to C
115.46.002	128mm
115.46.004	192mm
115.46.008	320mm
115.46.014	640mm

#### Dia 14 mm, Stainless Steel Matt Hollow Bar Handle,




Article No.	C to C
109.85.034	96mm
109.85.036	160mm
109.85.038	224mm
109.85.039	320mm

Special Order

Stock Available


## Inset Handles

Finish: Silver Anodized




Article No.	Length
126.20.905	2500 mm

Finish: Silver Anodized



Article No.	Length
126.21.902	2500 mm

Finish: Silver Anodized




A= 43mm  
B= 20mm  
C=1.6mm

Article No.	Length
126.27.907	3000 mm

Special Order

## Inset Handles



Finish: Silver Anodized

Article No.	Length
126.07.933	3000 mm

Finish: Stainless Steel Hairline

Article No.	Length
126.07.033	3000 mm




Finish: Silver Anodized

Article No.	Length
126.27.906	3000 mm

## Flush Handle

Profile Handle for Wood Sliding Door



Material : Aluminium


Finish : Silver anodized

Article No.	Length
126.12.900	2500 mm

Stock Available


## Gola Profile Handles

**Finish:** Silver Anodized




Article No.	Length
126.35.945	2500 mm

**Finish:** Silver Anodized




Article No.	Length
126.39.925	2500 mm

**Finish:** Silver Anodized  
End Cap For 126.39.925  
Plastic Silver Coloured




Article No.	
126.39.997	RHS
126.39.998	LHS

Grip Profile Handle  
**Material:** Aliminium Anodized




Article No.	Length
126.34.925	2500 mm

Grip Profile Handle  
**Material:** Aliminium Anodized



Article No.	Length
126.20.902	3000 mm

Grip Profile Handle  
**Material:** Aliminium Anodized




Article No.	Length
126.27.908	3000 mm

Special Order

Stock Available

### Gola Profile Handles

**Finish:** Silver Anodized



Article No.	Length
126.37.911	3000 mm

**Finish:** White Coloured



Article No.	Length
126.37.700	2500 mm

**Finish:** Black Coloured



Article No.	Length
123.37.301	2500 mm

Special Order

Cover Cap for L Shape  
Gola Profile




**RHS Cap**

Article No.	Finish
126.37.997	Silver Coloured
126.37.977	White Coloured
126.37.937	Black Coloured

**LHS Cap**

Article No.	Finish
126.37.998	Silver Coloured
126.37.978	White Coloured
126.37.938	Black Coloured

**Finish:** Silver Coloured



Article No.	Length
126.36.900	2500 mm

**Finish:** White Coloured



Article No.	Length
126.36.700	2500 mm

**Finish:** Black Coloured



Article No.	Length
126.36.300	2500 mm

Cover Cap for C Shape  
Gola Profile



Article No.	Finish
126.37.996	Silver Coloured
126.37.976	White Coloured
126.37.936	Black Coloured

Fixing Bracket for Gola Profile



Article No.	Finish
126.37.990	Stainless Steel Matt

Fixing Bracket for Ceiling



Article No.	Finish
126.37.988	Stainless Steel Matt


Stock Available

## Minifix Connectors

### Minifix 15

Connector Housing for wood thickness from 12 to 23mm

**Finish:** Zinc Alloy,



Article No.	Finish
262.26.532	15 dia/ wood 15 mm Nickel Plated
262.26.534	15 dia/ wood 18 mm Nickel Plated
262.26.036	15 dia / wood 23 mm Zinc Bright

### Econo S Bolt

Steel Galvanized with clip-on plastic sleeve, 5 mm Euro thread. Thread length 11mm.  
Sleeve-Polystyrene Red.



Article No.	Drilling distance
262.27.679	24 mm

### Econo Bolt- Machine Thread

Steel Galvanized 5 mm machine thread. Thread length 11mm.



Article No.	Drilling distance
262.28.643	34 mm

### Econo Bolt-Machine Thread (Steel Galvanized M6x9 mm)



Article No.	Drilling distance
262.28.319	34 mm

### Econo Bolt - Euro Thread

Steel Galvanized 5 mm Euro thread. Thread length 11mm.



Article No.	Drilling distance
262.28.624	34 mm

## Cover Cap

**Dowel:** Nylon Socket for Machine Thread Econo Bolts



Article No.	Dia. x Length
039.33.268	10.8 x 11.5mm

**Dowel:** Nylon Socket for Econo S Bolts and Euro threaded Bolts

Article No.	Dia. x Length
039.32.050	10 x 12 mm

**Glue-in Dowel:** Plastic socket for M6 threaded bolt

Article No.	Dia. x Length
039.33.462	8 mm x 11 mm
039.33.266	10 mm x 11 mm

**Cover Cap** for Minifix 15 housing, for **Thickness** from 13 to 29 mm  
**Diameter:** 17 mm  
**Material:** Plastic



For wood thickness  
16 - 29 mm

Article No.	Colour
262.24.751	White for 16mm - 29mm

**Cover cap,** Plastic, self-adhesive, Ø 18 mm







Article No.	Colour
245.25.500	Light grey
245.25.310	Beech

Special Order





Stock Available

## Minifix Connectors

### Ordering Information

	Article No.	2 Piece Connector	3 Piece Connector	4 Piece Connector
	Minifix casing			
	262.26.532	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.26.534			
	262.26.264			
	Connecting Bolt			
	262.27.679	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.28.624			
	Dowel			
	039.32.050		1 no.	as per requirement
	Cover Cap			
	262.24.064	—	—	1 no. as per requirement
	262.24.055			
	262.24.751			
	262.24.153			

### Ordering Information

	Article No.	2 Piece Connector	3 Piece Connector	4 Piece Connector
	Minifix casing			
	262.26.532	1 no. as per requirement	1 no. as per requirement	1 no. as per requirement
	262.26.534			
	262.26.264			
	Machine Thread Connecting Bolt			
	262.28.643	1 no.	1 no.	as per requirement
	262.28.319	1 no.	1 no.	as per requirement
	Dowel			
	039.33.268	—	1 no.	as per requirement
	Cover Cap			
	262.24.064	—	—	1 no. as per requirement
	262.24.055			
	262.24.751			
	262.24.153			

Special Order


Stock Available

## Spreading Sleeve

### Minifix Spreading Sleeve Strip of Sleeves

For drilled hole Ø 5 mm

Material : Nylon



Article No.	Length
042.98.051	12 mm

**Dowel:** Made of white birch wood




Article No.	Dia. & Length
267.89.854	8 x 40 mm

### Minifix sleeve

#### M6 glue-in Sleeves

For drilled hole Ø 10 mm

Material : Nylon



Article No.	Length
039.35.064	13 mm

## Rafix Connectors

### Rafix - SE Connecting Bolts

Steel with Special threading (EURO)

for Drilled hole Ø 5 mm

Thread length 12 mm

Drive: Cross slot Pz2



Article No.	Finish
263.20.981	Galvanised

### Rafix - SE 32: Connector housing

Finish: Plastic



For wood thickness 19 mm

Article No.	Colour
263.12.105	Brown

Special Order

Stock Available

Panel Connectors

**KEKU - Suspension  
Fittings Screw Fixing  
Type**

**Area of application:**

For fastening panels  
to frame structures

**Material:** Plastic

**Colour:** Black



**EH - Frame component**

**For screw-fixing to  
substructures**

**Installation:** With  
Ø 4 mm chipboard  
screws or VARIANTA  
Ø 3 mm or 5 mm  
special screws



Article No.	For Installation with
-------------	-----------------------

262.49.365	Chipboard screws with countersunk head 4.0 mm
------------	---

**Panel component**

**Installation:**

For screw-fixing  
to panels with Ø 4 mm  
chipboard screws or  
VARIANTA Ø 3 mm or  
5 mm special screws



With lip

Article No.	For Installation with
-------------	-----------------------

262.49.356	Chipboard screws with countersunk head 4.0 mm
------------	---

**KEKU - Push-in fittings**

**Area of application:**

For fastening panels to frame  
structures

**Material:** Plastic

**Colour:** Black



**AS - Frame component**

**For screw-fixing to**

**substructures**

**Installation:** With Ø 4 mm  
chipboard screws or VARIANTA  
Ø 3 mm or 5 mm special  
screws



Article No.	For Installation with
-------------	-----------------------

262.50.368	Chipboard screws with countersunk head 4.0 mm
------------	---

**AS - Panel component**

**Installation:** With Ø 4 mm  
chipboard screws or VARIANTA  
Ø 3 mm or 5 mm special  
screws



Article No.	For Installation with
-------------	-----------------------

262.50.359	Chipboard screws with countersunk head 4.0 mm
------------	---

Special Order

Stock Available



## IXCONNECT Spreading connector


### Ixconnect SC 8/25



One piece cabinet connector for small furniture items & drawers

For concealed, not removable cabinet connections

Used in MDF and chipboard in combination with wooden dowel with recommended thickness from 15-19mm




Article No.	For Installation with
262.11.111	RTA Connector, Ixconnect SC 8/25, plastic

### Ixconnect SC 8/60



One piece cabinet connector for large furniture items Used in MDF and chipboard in combination with wooden dowel with recommended thickness from 15-19mm

For concealed applications, only a Ø 6 mm drill hole for securing the connector is visible after installation



Article No.	For Installation with
262.11.117	RTA Connector, Ixconnect SC 8/60, plastic

Special Order

Stock Available

Bed Connectors

**Bed brackets:** Steel  
With 2 slots  
**Installation:** For screw-fixing



Article No.	Finish
558.12.943	Nickel plated

**Bed Connectors**  
With cranked hook-in part  
**Material:** Steel  
**Installation:** For screw-fixing




**For Height:** 100 mm

Article No.	Finish
271.03.511	Yellow chromated
271.03.910	Chromated

**For Height:** 130 mm

Article No.	Finish
271.03.531	Yellow chromated
271.03.930	Chromated



Special Order


Stock Available

## Connecting Screws

### M4 Threaded Screw

With Combi slot for PZ 2 cross slot or flat blade screwdrivers

**Material:** Steel nickel plated





Article No.	Length
022.34.157	15 mm
022.34.255	25 mm
022.34.308	30 mm

### Sleeve with M4 Internal Thread

With combi slot or flat blade screwdrivers

**Finish:** Steel, Nickel Plated




Article No.	L	Wood Thickness
267.01.715	27	28 mm - 36 mm
267.01.717	35	37 mm - 45 mm

### Confirmat One-piece connector

With shank Ø 7

Head Ø 10 mm

**Thread length 50 mm**




Article No.	Finish
264.42.190	Steel Galvanised

**Trim Cap:** For Confirmat One-piece connector

**Material:** Plastic

**Installation:** Push fit




Article No.	Finish
045.01.704	White
045.01.008	Pine

**Made of nickel-plated or black steel, with M6 thread**

**Connecting screw with sleeve**

**Drive:** Cross slot PZ and longitudinal slot




Article No.	Length
267.05.703	36 mm - 46 mm

Special Order

Stock Available


## Technical Information for Hinges

### Drilling and fixing pattern




#### Cup for screw fixing:

Preferably with countersunk chipboard screws



**Mounting plate for screw fixing:** Preferably with countersunk chipboard screws or with pre-mounted special screws into 32 mm series drilled holes



#### Drilling pattern


Metallamat A series follow the drilling pattern of 48 x 6

Special Order


Stock Available

## Technical Information for Hinges


### Mounting pattern of hinges




**Mounting methods:** Generally there are 3 types of mounting



**Full overlay mounting:**  
Recommended for Flush Doors




**Half overlay mounting:**  
Recommended for Rebated Doors



**Inset overlay mounting**

### Choice of mounting plate



**Example:** With door overlay of 10 mm and a distance to the cup of 3 mm, a mounting plate with distance 6 mm has to be chosen.


Door overlay mm

7	8	9	10	11	12	13	14	15	16	17	18	19	
									3	4	5	6	0
													3
													6
													9
3	4	5	6										

Distance to cup mm

Mounting plate distance mm

### Determination of required minimum gap for half overlay



The required minimum gap depends on the type of hinge, distance to cup and door thickness. After the dimensions of distance to cup and door thickness has been determined, the minimum gap can be looked up in the application table.

**Example:** With a door thickness of 19 mm and a distance to cup of 4 mm a minimum gap of 2 mm is required.


Door thickness mm	Distance to cup mm			
	3	4	5	6
16	1.2	1.2	1.1	1.1
18	1.7	1.7	1.6	1.6
19	2.0	2.0	1.9	1.9
20	2.4	2.3	2.2	2.2
22	3.3	3.1	3.0	2.9
24	4.5	4.2	4.0	3.9
26–32	Trial hanging is recommended			

Special Order

Stock Available


## Technical Information for Hinges

### Fixing door to carcass




Metallamat A series hinges are fitted onto the fixed mounting plate by sliding on

### Adjustment options



Metallamat A hinges have 3 dimensional adjusting facility



#### A. Lateral adjustment:

Adjusting distance on concerned hinge +3 mm



#### B. Height adjustment:

This is done via the mounting plate adjusting distance +/- 2 mm



#### C. Depth adjustment:

Adjusting distance on concerned hinge +4 mm, -1 mm

## Technical Information for Hinges


### Recommendation with regard to the number of concealed hinges to be used per door panel:

The number of concealed hinges per door depend on

- a) door width
- b) door height
- c) door weight (kg.) &
- d) door material (type of wood used).

**Example:** 3 concealed hinges have to be mounted on a door panel with a height of 1500 mm and a door weight of 9-12 kg, keeping in mind the door width of 500 mm.

Should the width increase then the number of hinges to be used will be 4 pieces.

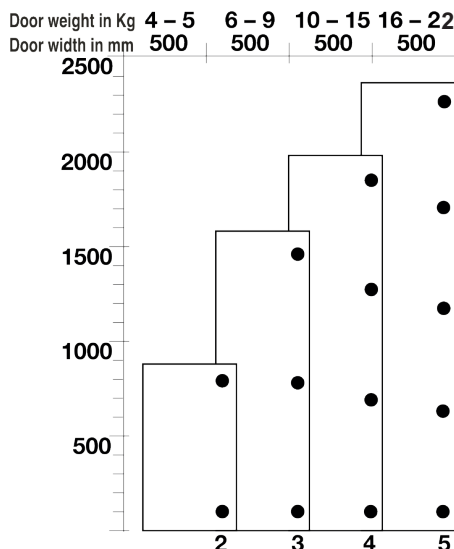


The number of concealed hinges shown in the diagram is just a recommendation though a fitting test is required.

### Recommendation for normal furniture hinges like the BUTT and ROLLED hinges per door panel: This depends on

- a) door width
- b) door height
- c) door weight (kg.)
- d) Door material (type of wood used)

**Example:** 2 furniture hinges have to be mounted on a door panel with a height of 900 mm and a door width of 600 mm considering a thickness of 19 mm

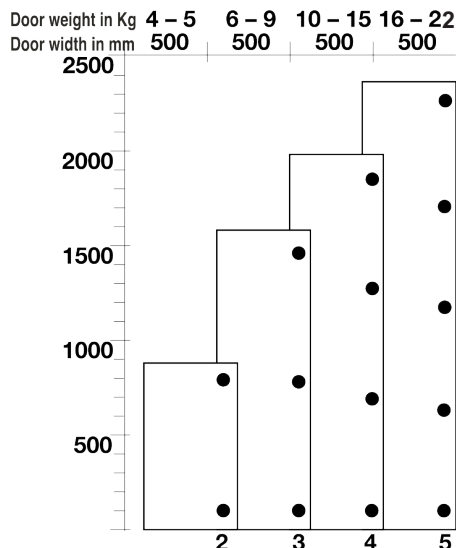


Eg. Two furniture hinges are recommended for a door height of 900 mm

The number of furniture hinges shown in the diagram is just a recommendation though a fitting test is required.

## Eco Metalla Hinge



Slide-on Mounting  
Material: Mild Steel  
Finish: Nickel Plated  
Passed 24 Hours Salt Spray Test  
Cycle Testing: Passed 20,000 Cycles  
3-Dimensional Adjustment  
Opening Angle: 110°  
Thickness of Hinge Arm: 11.3 mm  
Diameter of Hinge cup: 35 mm  
Door Thickness: 14-22 mm  
4 hole mounting plate

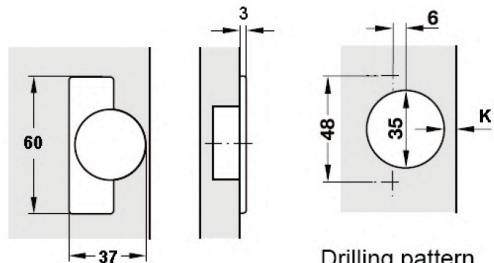

Drilling pattern  
48/6

### Finish: SS Polished

Article No.	Overlay
483.01.745	Full Overlay With 4 Hole Mounting Plate, Steel Nickel Plated
483.01.746	Half Overlay With 4 Hole Mounting Plate, Steel Nickel Plated
483.01.747	Inset With 4 Hole Mounting Plate, Steel Nickel Plated

### Note:

- Not suitable for undersink application
- Article consists of 2 Hinges+2 Mounting Plates+ 12 fixing screws

Special Order

Stock Available




## Metalla Concealed Hinges

### Opening Angle 110°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility  
Door thickness: 14-22mm  
Finish: Nickel Plate  
Material: Mild Steel

#### Cup dimensions



#### Drilling dimensions for cup fixing screw fixing




### Full overlay mounting

110° full overlay hinges with 0 mm mounting plate 2pcs each & screws 8 pcs.




#### Mounting plate distance




Article No.	Mounting
311.90.980	0 CRANK

### Half overlay mounting

110° half overlay hinges with 0 mm mounting plate 2pcs each & screws 8 pcs.



#### Mounting plate distance




Article No.	Mounting
311.90.981	7 CRANK

### Inset mounting

110° inset overlay hinges with 0 mm mounting plate 2pcs each & screws 8 pcs.



#### Mounting plate distance



Article No.	Mounting
311.90.982	16 CRANK

#### Note:

- Not suitable for undersink application
- Article consists of 2 Hinges+2 Mounting Plates+ 8 fixing screws

Special Order

Stock Available


## Metalla Concealed Hinges (With 4 Holes Mounting Plate)

### Opening Angle 110°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility  
Door thickness: 14-22mm  
Finish: Nickel Plated  
Material: Mild Steel  
Mounting Plate: 4 holes

### Cup dimensions



### Drilling dimensions for cup fixing screw fixing




### Note:

- Not suitable for undersink application
- BOM article consist of 2 Hinges + 2 Mounting Plates
- We dont provide screws with these Articles, (Please use nickel plated screws to avoid rusting)

Special Order

### Full overlay mounting

110° full overlay hinges with (4 holes) 0 mm mounting plate




Article No.	Mounting
311.01.121	0 CRANK

### Half overlay mounting

110° half overlay hinges with (4 holes) 0 mm mounting plate



### Mounting plate distance




Article No.	Mounting
311.01.122	7 CRANK

### Inset mounting

110° Inset hinges with (4 holes) 0 mm mounting plate



### Mounting plate distance



Article No.	Mounting
311.01.123	16 CRANK



Stock Available

## Metalla Clip-on (Economical Range)



### Product Features:

- Mounting Plate with 4 holes for extra stability Clip-on Mounting
- Material: Mild Steel
- Finish: Nickel Plated
- Passed 48 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 110°
- Thickness of Hinge Arm: 11.3 mm
- Door Thickness: 14-24 mm
- Drilling Pattern: A= 48 mm & B = 6 mm

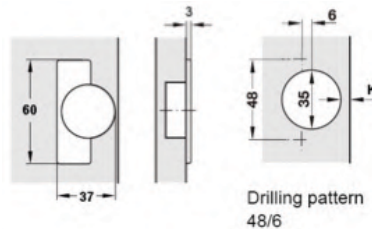

Article No.	Mounting
311.01.146	0 Crank 4 Hole MP
311.01.145	Half Crank 4 Hole MP
311.01.144	Inset 4 Hole MP

### Note:

- Not suitable for undersink application
- Article consists of 2 hinges + 2 mounting plates + 12 screws

Special Order

Stock Available


## Metalla Slide on

### Slide-on Soft Close Hinge



#### Product Features:

- Slide-on Mounting
- Material: Mild Steel
- Finish: Nickel Plated
- Passed 48 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 105°
- Thickness of Hinge Arm: 11.3 mm
- Diameter of Hinge cup: 35 mm
- Door Thickness: 14-24 mm
- Drilling Pattern: 48/6 mm



Article No.	Mounting
315.07.042	0 Crank
315.07.043	Half Crank
315.07.044	Inset


#### Note:

- Not suitable for undersink application
- Article consists of 2 hinges + 2 mounting plates + 8 screws

Special Order

Stock Available

## Metalla Soft Closing - Damper Hinge




### Features:

- Soft Close integrated into hinge arm
- Clip-on Mounting
- Material : Mild Steel
- Finish : Nickel Plated
- Passed 48 hour salt test
- Material certified according to TUV Germany
- Cycle testing - Passed 40,000 cycles
- 3 Dimensional adjustment facility

### Technical Information:


- Opening Angle : 110°
- Thickness of Hinge cup : 11.3 mm
- Diameter of Hinge cup : 35 mm
- Door Thickness : 14 - 24 mm

### Full overlay mounting



Article No.	Mounting
<b>315.07.075</b>	Full Overlay Mounting


### Half Overlay Mounting



Half overlay, Crank = 7

Article No.	Mounting
<b>315.07.076</b>	Half Overlay Mounting

### Inset Mounting



Article No.	Mounting
<b>315.07.077</b>	Insert Overlay Mounting


### Note:

- Not suitable for undersink application
- Article consists of 2 Hinges+2 Mounting Plates+ 8 fixing screws

Special Order

Stock Available

## Thick Door Metalla Soft Close Hinge

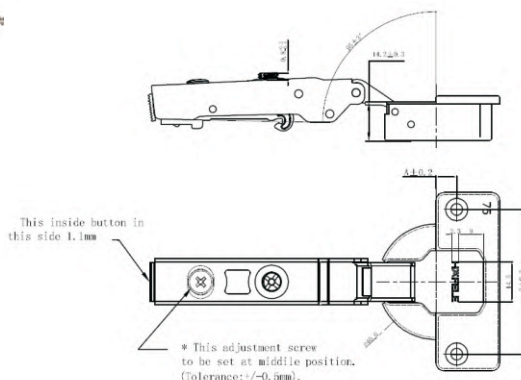

### Specifications:

- Material: Mild Steel
- Finish: Nickel Plated
- Anti Corrosion testing: Cleared 48 hours of salt testing
- Material Certification: TUV Certified
- Cycle Testing: Passed 40,000 Cycle test
- Opening Angle 95°
- Thickness of Hinge Cup 14.2 mm
- Diameter of Hinge Cup 40 mm
- Door Thickness 18-40 mm
- Drilling Pattern 52/7.5 mm

### Finish: SS Polished

Article No.	Overlay
<b>315.07.072</b>	Thick door Metalla Soft Close hinge, Full Overlay, 40mm door thickness
<b>315.07.073</b>	Thick door Metalla Soft Close hinge, Half Overlay, 40mm door thickness
<b>315.07.074</b>	Thick door Metalla Soft Close hinge, Inset, 30 mm door thickness

### Note:

- Not suitable for undersink application
- 1 set consist of 2 hinges+2mounting plates +8 fixing screws +2 hinge cup caps +2 hinge arm cap


Special Order

Stock Available

## Metalla Stainless Steel 304 Soft Close Damper Hinge


Soft Close Integrated into Hinge arm

- Clip-on Mounting
- Material: Stainless Steel 304 (body)
- Finish: SS Polished
- Passed 96 Hours Salt Spray Test
- Cycle Testing: Passed 40,000 Cycles
- 3-Dimensional Adjustment
- Opening Angle: 104°
- Thickness of Hinge Arm: 11.3 mm
- Diameter of Hinge cup: 35 mm
- Door Thickness: 14-22 mm
- Drilling pattern: 48x6 mm

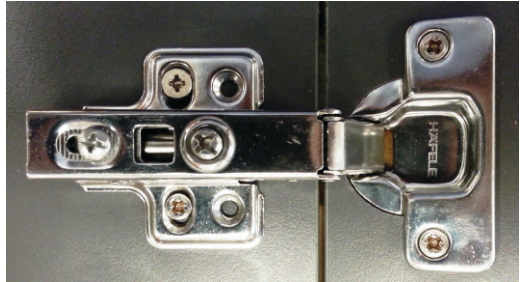


Finish: SS Polished


Article No.	Overlay
311.01.652	Full Overlay
311.01.653	Half Overlay
311.01.654	Inset Overlay

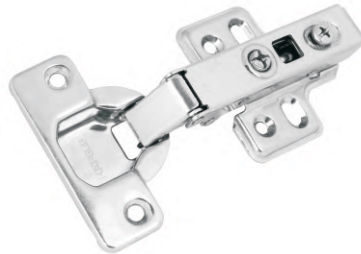

### 3 Dimensional Adjustment



Side adjustment: -3mm



Height adjustment: +/-2mm



Depth adjustment: +3/-1mm

### Note:

- Article consists of 2 hinges + 2 mounting plates + 12 screws

### Product Application:

- Kitchen Under Sink Cabinets
- Coastal Areas

Special Order

Stock Available


## Pie Cut Hinge



### Specification:

Material: Cup-Mild Steel, Hinge Arm & Mounting Plate- Zinc Alloy  
 Finish: Nickel Plated  
 Drilling pattern: 45/9.5 mm  
 Hinge cup dia: 35 mm  
 Drilling depth for cup: 11 mm  
 Door thickness: 14-24 mm  
 Opening angle: 135°  
 Partial opening angle: 65°  
 Full opening angle: 135°

### Cup dimension and drilling pattern for cup fixing

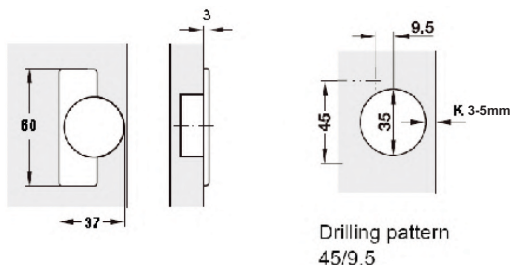

### Finish: SS Polished

Article No.	Overlay
311.01.561	PIE CUT CORNER HINGE 135 DEGREE 48/6 MM

### Wide Angle Soft Close Hinge

Opening angle: 165°  
 Drilling pattern: 48/6 mm  
 Material: Steel  
 Finish: Nickel Plated



Article No.	Mounting
315.07.012	0 mm CRANK

### Note:

- Not suitable for undersink application
- 2 hinges +2 mounting plate +8 screws
- Pie Cut hinge is compatible with wide angle hinges.

Special Order

Stock Available




## Metallamat A Concealed Hinges

### Opening angle 110°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility. Door thickness: 16 to 19mm


#### Cup Dimension



#### Drilling dimensions for cup fixing Screw Fixing




### Full overlay mounting Opening angle 110°




Article No.	Mounting
316.30.500	0 CRANK

### Half overlay mounting Opening angle 110°



Article No.	Mounting
316.30.501	9 mm CRANK

### Inset mounting Opening angle 110°



Article No.	Mounting
316.30.502	18 mm CRANK

### Mounting plates for Metallamat Hinges: Screw fixing with chip board screws



Article No.	Thickness
316.51.502	2 mm

### BOM Ordering Information:

Article No.	Mounting
316.30.580	0 mm CRANK
316.30.581	9 mm CRANK
316.30.582	17 mm CRANK

#### Note:

- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately
- Metallamat A hinge 1 + 1 Mounting Plate 2mm

Special Order

Stock Available


## Metallamat A Concealed Hinges Thick Door / Profile Door Hinge

Opening angle 92°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility. Door thickness: 24 to 35mm

Cup Dimension




Drilling dimensions for cup fixing  
Screw Fixing



### Note:


- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately
- Metallamat A hinge 1 + 1 Mounting Plate 2mm

Full overlay mounting  
Opening angle 92°

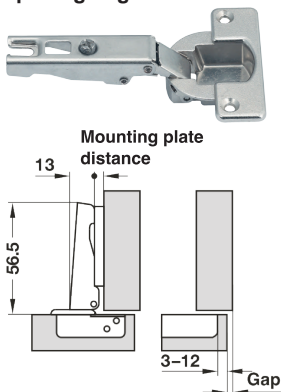


Article No.	Mounting
316.31.500	0 CRANK

Half overlay mounting  
Opening angle 92°

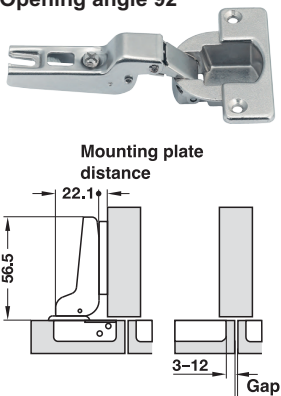

Article No.	Mounting
316.31.501	9mm CRANK

Inset mounting  
Opening angle 92°

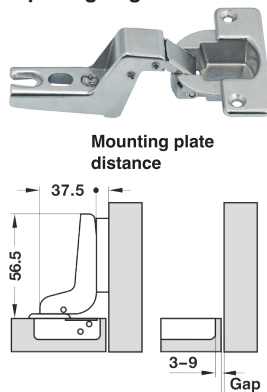

Article No.	Mounting
316.31.502	17mm CRANK

Mounting plates for  
Metallamat Hinges: Screw  
fixing with chip board screws



Article No.	Thickness
316.51.502	2 mm

### BOM Ordering Information:

Article No.	Mounting
316.31.510	0 mm CRANK
316.31.511	9 mm CRANK
316.31.512	17 mm CRANK

Special Order

Stock Available


Special Order

## Glass Door Hinges - Metallamat A Concealed Hinges


Glass doors thickness :  
4 to 5 mm  
Opening angle 92°



Cup dimensions



Drilling dimensions for cup fixing



Minimum gap for glass doors


Dimensions and gap specifications in drawings and tables are calculated.

• With factory settings

Inset mounting  
Opening angle 92°



Mounting plate  
distance



Article No. Cup fixing

317.02.502 Screw fixing 17.5 Crank

Cruciform mounting plates  
Screw-mounted



Article No. Reinforcement

317.93.602 2 mm

Front plates: Straight-edged  
Material: Plastic



Article No. Finish

317.10.410 Chrome-plated, Polished

Front plates: Round  
Material: Plastic



Article No. Finish

317.10.420 Chrome-plated, Polished

### Note:

- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately
- Article No: 015.35.824, 4 x 15mm Hospa Chipboard Screws

Special Order

Stock Available


## Metallamat A Concealed Hinges Wide Angle Hinge

Opening angle 175°




Slide-on hinges with automatic closing spring, with 3 dimensional adjusting facility.  
Door thickness: 20 to 26 mm


Cup Dimension



Drilling dimensions for cup fixing  
Screw Fixing




Full overlay mounting  
Opening angle 175°



Article No.	Mounting
316.32.600	0 CRANK

Half overlay mounting and  
inset mounting  
Opening angle 175°



Article No.	Mounting
316.32.601	12 mm CRANK

Mounting Plates for  
Metallamat Hinges: Screw  
fixing with chip board screws



Article No.	Thickness
316.51.502	2 mm

Article No. : 015.35.824  
4 x 15mm Hospa Chipboard  
Screws

### Note:

- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately

Special Order


Stock Available

## DUOMATIC Concealed Hinges Thickness up to 40 mm


DUOMATIC Concealed hinge  
For profile doors up to 40mm  
Opening angle 94°



Minimum distance between  
door and side panel




Minimum  
distance



Minimum  
gap


Drilling pattern for cup fixing  
for screw fixing



### Note:


- Not suitable for undersink application
- Fixing screws not supplied with hinges. To be ordered separately
- Duomatic Hinge 1 + 1 Mounting Plate 2 mm

### Full overlay mounting




Article No.	Cup fixing
329.05.605	0 Crank

### Half overlay mounting



Article No.	Cup fixing
329.05.614	11 Crank

### Inset mounting



Article No.	Cup fixing
329.05.632	22 crank

DUOMATIC Cruciform  
mounting plates  
screw fixing with chipboard  
screws



Article No.	Thickness
329.73.502	2 mm

### Ordering Information:

Article No.	Mounting
329.05.609	Full Overlay
329.05.619	Half Overlay
329.05.634	Inset

Special Order

Stock Available


## Furniture Hinge

**Easy Mount Hinge:** Screw-mounted

Side panel thickness from 16 to 22 mm

**Opening angle 90°**

**Shutter Thickness from 16mm**




**Material:** Mild Steel



Article No.	Finish
<b>343.33.970</b>	Galvanized

## Kubikina Hinge



Chrome plated matt / Grey

**Area of application:** For overlay or inset mounting

**Opening angle:** 180°

**Material:** Zinc alloy/plastic


**Installation:** For screw fixing

**Adjustment facility:** Height  $\pm 1.5$  mm, side  $\pm 1$  mm, depth  $\pm 1.5$  mm (with overlay mounting), height  $\pm 1.5$  mm, side  $\pm 1.5$  mm, depth  $\pm 1$  mm (with inset mounting)

3-dimensionally adjustable for shutter alignment with millimetre accuracy

Article No.	Finish
<b>341.24.415</b>	Chrome plated matt/ Grey


### Drilling pattern



With wood thickness 18 mm: A = 9 mm

With wood thickness >20 mm: A = 10 mm

### Dimensions




Sample measurements for 20 mm thick wood

Hinge distance min. 500 mm

Door width up to 600 mm

The door's width must not exceed its height

### Number of hinges per door



Special Order

Stock Available

## Technical Information for DUO & DUO Forte




### Duo – The fitting with dual function

For flaps made of wood, glass or with aluminium frame


#### A

- Adjusting the arms (overshear) turns the lid stay into a flap stay.
- Less space required inside the cabinet
- Wear-resistant friction coupling with large adjusting range

#### Application

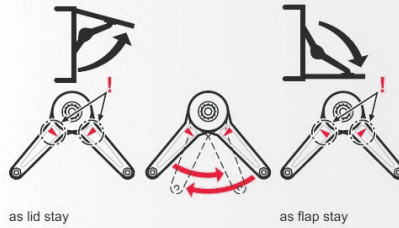

#### Front adjustment facility



Height adjustment\*

Side adjustment\*

Tilting angle adjustment\*

Holding power adjustment

\* depends on the hinges that are installed

#### Holding power adjustment with SW4 Allen key

(Cat. No. 008.28.241)



Stronger holding power  
= **locking** function  
= flap locks in any position  
(multi-position stop)


Weaker holding power  
= **braking** function  
= lid stay closes softly/flap stay  
opens gently

#### Surfaces

Black, nickel-coloured or white




#### Lateral space requirement/ side distance (S) for screw-on bracket




$S = 12 + \text{door overlay}$

#### Minimum installation depth



Duo standard



Duo forte

Special Order

Stock Available



## DUO

### Lid Stays - Duo With adjustable braking effect



**Area of application:** For wooden flaps and flaps with aluminium frame, also suitable as flap stays

**For flaps with aluminium**

**frame:** width 20 mm or 45 mm

**Opening angle:** 75°, 90° or 110°

**Version:** With self-closing function

**Mounting:** For left and right hand use

**Flap Height:** upto 500mm

**Weight:** 2 to 15kg



Light version

HUWIL

Article No.	Area of application
373.66.211	For flaps made of wood or with aluminium frame. Frame width 45 mm and above <b>Finish: Black</b>
373.66.611	For flaps made of wood or with aluminium frame. Frame width 45 mm and above <b>Finish: Nickel Plated</b>
373.66.261	For flaps made of wood or with aluminium frame. Frame width 45 mm and above <b>Finish: White</b>
373.66.621	For flaps with aluminium frame with frame width 20 mm <b>Finish: Nickel Plated</b>

Special Order

## DUO Forte

### Flap Stays / Duo Forte



- **Opening angle:** 75°, 90° or 110° (with different opening angles of hinges)

- **Mounting:** For left and right hand use

- The Flap locks in any position and it stops in end position when released by slight pressure

- Can be mounted on wooden door flaps and for door flaps with aluminum frame

- Gentle push helps in opening and closing of the Flap/ Cabinet Door

- Made of Zinc alloy and the mounting bracket are made of steel

- Flap weight bearing capacity is from 3kg - 15kg

**Flap Height:** upto 700mm

**Area of application:** Also suitable for use as flap stays. Opening angle: 75°, 90° or 110°

**Material:** Stay: Zinc alloy

**Mounting bracket:** Steel

**Finish:** Black, Nickel plated & White

**Version:** With self mounting:

For left and right hand use

**Installation:** Without tools (clip mounting system)

**Distance from edge:** 28 mm

**Lock Function:**

Locking: Flap locks in any position

**Breaking function:** Flap locks in end position, release by slight pressure

Article No.	Area of application
373.66.311	DUO Forte Flap Stay, <b>Black</b> , For Wood/ED = 28mm
373.66.631	DUO Forte Flap Stay, <b>Nickel Plated</b> , For Wood/ED = 28mm
373.66.371	DUO Forte Flap Stay, <b>White</b> , For Wood/ED = 28mm
373.66.641	DUO Forte Flap Stay, <b>Nickel Plated</b> , For Aluminium/ED = 28mm

**Adapter: A must for all aluminium frame applications. (To be ordered separately)**



Article No.	Finish
563.25.960	Nickel plated


Stock Available



## DUO Installation


### Installation as lid stay

#### Opening angle 75°




Cabinet height mm	Flap weight kg Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
250	7.0	15.0	9.0	15.0
300	6.0	12.0	7.5	15.0
350	5.0	10.0	6.5	13.0
400	4.5	9.0	6.0	11.5
450	4.0	8.0	5.0	10.0
500	3.5	7.0	4.5	9.0

#### Opening angle 90°




Cabinet height mm	Flap weight kg Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
250	6.0	12.0	7.5	15.0
300	5.0	10.0	6.5	13.0
350	4.5	8.5	5.5	11.0
400	4.0	7.0	5.0	10.0
450	3.5	6.5	4.5	8.5
500	3.0	6.0	4.0	7.5

#### Opening angle 110°




Cabinet height mm	Flap weight kg Locking function		Braking function	
	1 fitting	2 fittings	1 fitting	2 fittings
200	6.0	12.0	8.0	15.0
250	5.0	9.5	6.0	12.0
300	4.0	8.0	5.0	10.0
350	3.5	7.0	4.0	9.0
400	3.0	6.0	4.0	7.5
450	2.5	5.5	3.5	7.0
500	2.0	5.0	3.0	6.0

### Installation as flap stay (use 2 fittings)



Separate catch required



Separate catch is not required.

Application possible from a cabinet height of 300 mm (internal height min. 255 mm).

Space requirement for fitting inside the cabinet when the flap is being closed:

130 mm from front edge of cabinet

Cabinet height mm	Flap weight kg Locking function	Braking function
	2 fittings	2 fittings
200	15.0	15.0
250	12.0	15.0
300	10.0	13.0
350	8.5	11.0
400	7.0	10.0


Special Order

Stock Available

## DUO Forte Installation


### Installation as lid stay

#### Opening angle 75°




Cabinet height mm	Flap weight kg		Braking function	
	Locking function		1 fitting	2 fittings
	1 fitting	2 fittings	1 fitting	2 fittings
300	9.0	15.0	12.0	15.0
350	8.0	15.0	11.0	15.0
400	7.0	14.0	9.0	15.0
450	6.0	12.5	8.0	15.0
500	5.5	11.0	7.0	15.0
550	5.0	10.0	6.5	13.0
600	5.0	9.5	6.0	12.0
650	4.0	8.5	5.5	11.0
700	4.0	8.0	5.0	10.5

#### Opening angle 90°



Cabinet height mm	Flap weight kg		Braking function	
	Locking function		1 fitting	2 fittings
	1 fitting	2 fittings	1 fitting	2 fittings
300	7.5	15.0	9.0	15.0
350	6.5	13.5	8.0	15.0
400	6.0	12.0	7.5	15.0
450	5.5	11.0	7.0	14.0
500	5.0	9.5	6.0	12.0
550	4.5	8.5	5.5	11.0
600	4.0	8.0	5.0	10.0
650	3.5	7.0	5.0	9.5
700	3.0	7.0	4.0	9.0

#### Opening angle 110°



Cabinet height mm	Flap weight kg		Braking function	
	Locking function		1 fitting	2 fittings
	1 fitting	2 fittings	1 fitting	2 fittings
250	7.5	15.0	10.0	15.0
300	6.5	12.5	8.0	15.0
350	5.5	11.0	7.0	14.0
400	4.5	9.5	6.0	12.5
450	4.0	8.5	5.5	11.0
500	4.0	7.5	5.0	10.0
550	3.5	7.0	4.0	9.0
600	3.0	6.0	4.0	8.0
650	3.0	5.5	4.0	7.5
700	3.0	5.0	3.5	7.0

Special Order

Stock Available

## GAS SPRING



### Specifications:


- Application: For Wood & Aluminum Shutters
- Material: Steel with Powder Coating
- Finish: Silver
- Center to Center: 245±2 mm
- Piston Capacity: 60,80,100,120,150 N
- Weight Capacity: Refer Chart
- Usage: For Lid Stay (upward opening)
- Max Panel Height: 600 mm
- Max Width: 900 mm

Weight for 1 pair of gas springs					
Max. lid weight (kg) with 75° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	
60	4	3	2.4	2	
80	5.4	4	3.2	2.8	
100	6.8	5.2	4	3.4	
120	8.2	6.2	5	4	
150	9.4	7	5.8	4.8	
Max. lid weight (kg) with 90° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	
60	3.6	2.6	2.2	1.8	
80	4.8	3.6	2.8	2.4	
100	6	4.4	3.6	3	
120	7.2	5.4	4.2	3.6	
150	8.2	6.4	4.6	4.2	
Max. lid weight (kg) with 110° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	
60	3.2	2.4	1.8	1.6	
80	4.2	3.2	2.4	2	
100	5.2	3.8	3.2	2.6	
120	6.2	4.6	3.8	3.2	
150	7	5.2	4.4	3.8	



All mounting plates included in the packet

Article No.	Power of Gas Spring
483.98.060	60N equivalent to 6 kg
483.98.061	80N equivalent to 8 kg
483.98.062	100N equivalent to 10 kg
483.98.063	120N equivalent to 12 kg
483.98.064	150N equivalent to 15 kg



Mounting dimensions when using hinges for full overlay mounting

Opening Angle	Dimensions (mm)		
	A	B	C
75°	260	80	25
90°	238	80	25
110°	215	70	25

Special Order

Stock Available

## Gas Spring (Upward Opening)



### Specifications:

Material: Steel with Powder Coating


Finish: Silver

Center to Center:  $254 \pm 2$  mm

Capacity: 200 & 250 N

Opening Angle	Dim. mm		
	A	B	C
75	249	82	15
90	226	60	15
110	269	102	15


All mounting plates included in the packet



Special Order

Stock Available

## Gas Spring (Upward Opening)

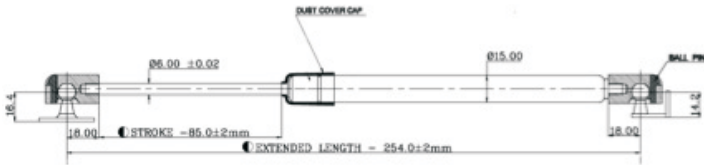

Article No.	Description
373.83.006	Gas Lift For Upward Opening C/c 254 mm 200 N
373.83.007	Gas Lift For Upward Opening C/c 254 mm 250 N

### Weight for 1 PC of gas spring


Max. lid weight (kg) with 75° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	700
200	8.1	6	5	4.2	3.8
250	10.5	7.9	6.5	5.4	5
Max. lid weight (kg) with 90° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	700
200	8.1	5.5	4	3.6	3.1
250	10.5	7.2	5.1	4.7	4
Max. lid weight (kg) with 110° application					
Spring Force	Lid Height in mm				
N	300	400	500	600	700
200	6	4.5	3.8	3.3	3
250	7.9	5.9	5	4.3	3.8

Special Order

Stock Available

## GAS SPRING

### Gas Spring (Downward Opening)

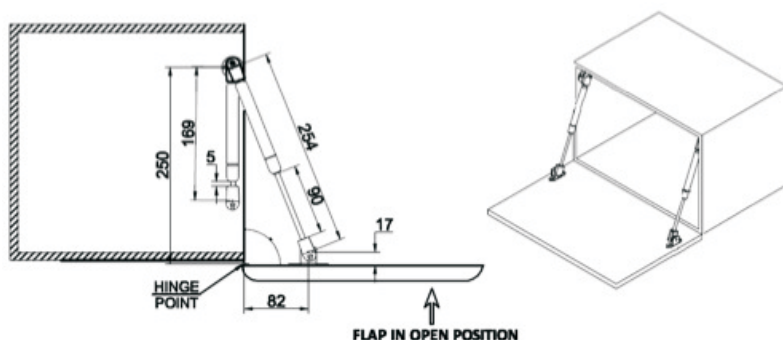

#### Specifications:

Material: Steel with Powder Coating  
 Finish: Silver  
 Center to Center:  $245 \pm 2$  mm  
 Capacity: 0 N

Article No.	Description
373.84.001	Gas Lift For Downward Opening C/c 245 Mm


Special Order

Stock Available

## Secure -T Furniture Locks

### Multi Purpose Lock

Finish : Chrome Polished  
Installation : Screw Fixing  
Material : Zinc Alloy  
Supplied with: Two Metal Keys



Article No.	Thickness for Door
232.01.250	22mm
232.01.260	32mm

Note: No. of key change 120

### Drawer Pedestal Lock

Front Central Lock, with  
600mm Aluminium Bar



Article No.	Description
234.99.260	Front Central Lock

### Multipurpose Lock

Finish: Nickel Plated  
Material: Zinc Alloy/Brass  
Supplied With: 2 foldable key  
Suitable for : 22 mm thickness  
of drawer



Article No.	No. of Key Change
232.01.280	1 to 240
232.01.990	Common key for this lock

## Multipurpose lock for Drawers

Finish: Silver  
Material: Lock Body - SS  
Key - Brass  
Supplied with: 11 pin brass  
dimple key  
Suitable for: 20,25 and 30mm  
drawer panel  
Key Combination: 1,00,000



Article No.	Thickness for drawer
223.64.001	20 mm
223.64.002	25 mm
223.64.003	30 mm

### Multipurpose lock for Wardrobe

Finish: SS Matt  
Material: Lock Body - SS  
Key - Brass  
Supplied with: 11 pin brass  
dimple key  
Suitable for: 25,30 and 35mm  
door panel  
Key Combination: 1,00,000




Article No.	Thickness for door
223.64.012	25 mm
223.64.013	30 mm
223.64.014	35 mm

Special Order

Stock Available

## Multipurpose Lock

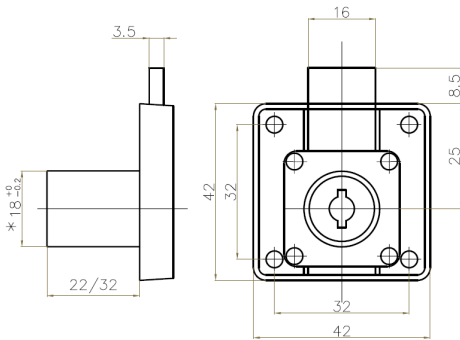

### Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickel Plated
- Size: 22 & 32 mm
- Key Combination: 960 numbers
- Master Key: Yes


Master Key



Article No.	Description
<b>232.38.922</b>	Multipurpose Lock 22 mm Nickel Plated, 960 Key Combination
<b>232.38.921</b>	Multipurpose Lock 32 mm Nickel Plated, 960 Key Combination
<b>209.99.900</b>	Master Key, Brass



## Pedestal Lock

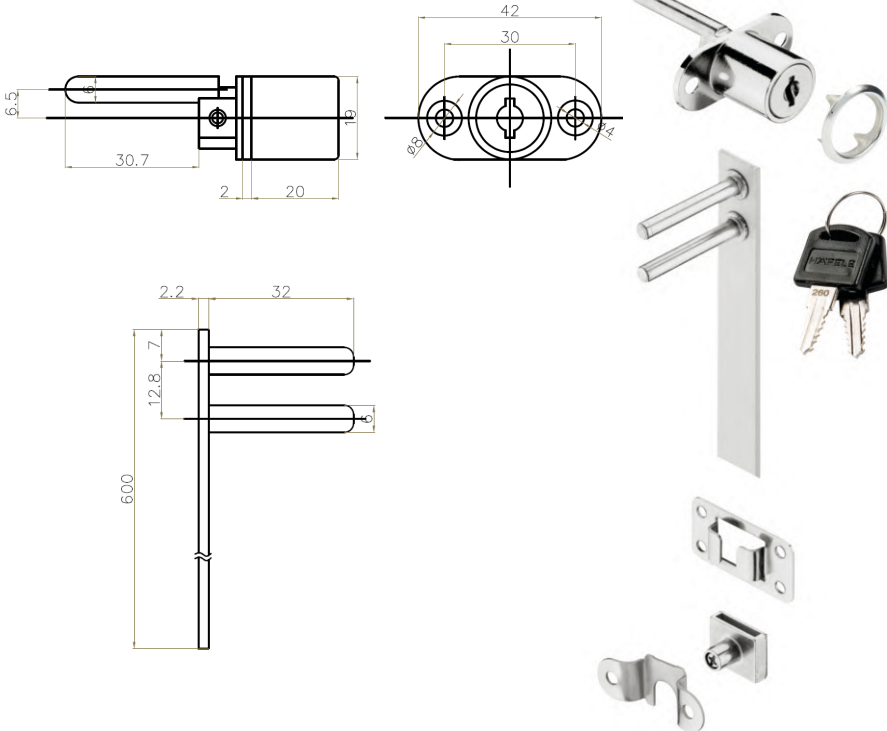

### Product Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Key Combination: 960 numbers
- Master Key: Yes


### Article Consists of:

- Lock body
- Brass keys (2 nos)
- Central locking rod (Aluminum bar) 600 mm
- Finish: Nickle Plated
- Rosette
- Bar guide (2 nos)
- Arresting pin (3 nos)

Special Order

Stock Available

## Pedestal Lock

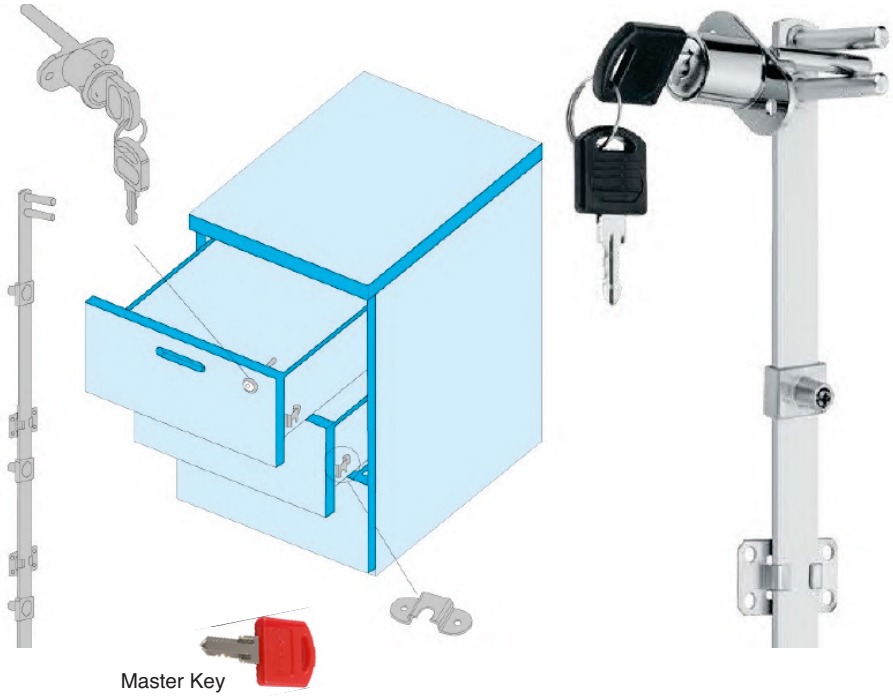


Article No.	Description
<b>234.99.961</b>	Pedestal Front Lock D19x20 Mm Nickel Plated, 960 Key Combination
<b>209.99.900</b>	Master Key, Brass

Special Order

Stock Available

## Espagnolette Lock

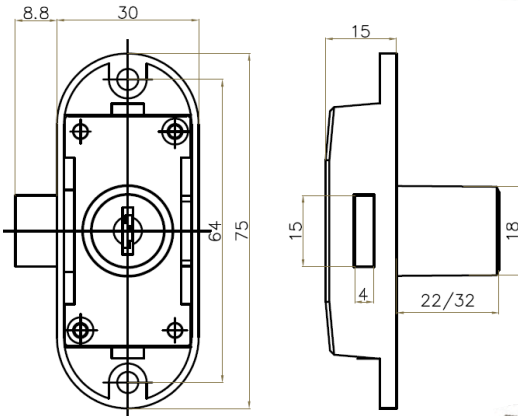

Master Key



### Product Features:

- Zinc Alloy Casing
- Brass Cylinder & Key
- Finish: Nickle Plated
- Sizes: 22 & 32 mm
- Key Combination: 960 numbers
- Master Key: Yes
- Backset: 15 mm
- Rod: Need to order separately (2 Pcs per Lock)

### Article Consists of:


- Lock body
- Brass keys (2 nos)
- Lock bolt (2 nos)
- Lock hook (2 nos)
- Bar guide big (2 nos)
- Bar guide small (2 nos)
- Strike plate
- Rosette

Note: Locking rod needs to be order separately (available for 1.5 m length)

Special Order

Stock Available

## Espagnolette Lock

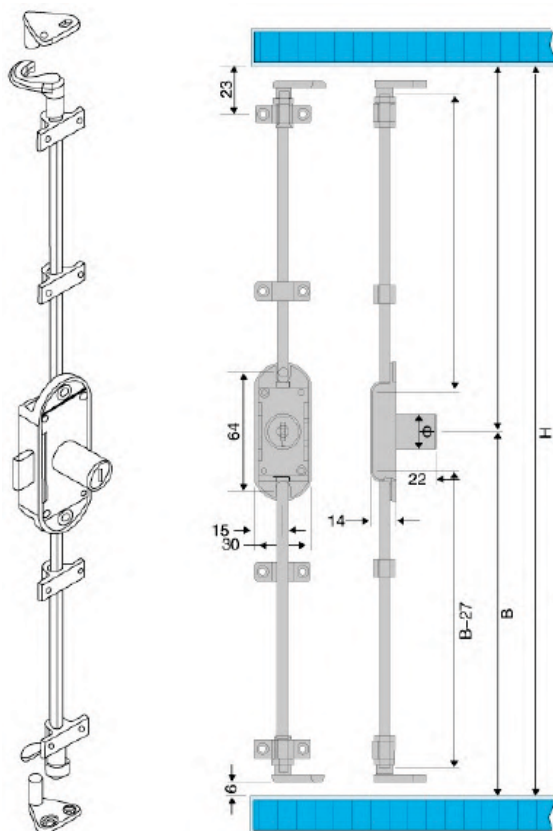

### Calculation for Rod Cutting:

H: Internal height of cabinet  
(should not exceed 3050 mm)  
B: Center of Cabinet  
Rod length: B-27 mm

E.G

Internal Cabinet height: 2700 mm (H)  
Center of Cabinet: 1350 mm (B)  
Rod length at each side:  
 $1350 - 27 = 1323$  mm

Article No.	Description
225.65.620	Espagnolette Lock 22 Mm Nicke Plated
225.65.621	Espagnolette Lock 32 Mm Nicke Plated
225.65.629	Rod For Espagnolette Lock 1.5 Meter Nickel Plated
209.99.900	Master Key, Brass


Special Order

Stock Available


## Espagnolette Lock

### Technical Details:


Lock Hook

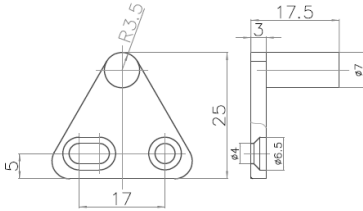


Bar guide (Small)




Bar guide (Big)



Lock Hook

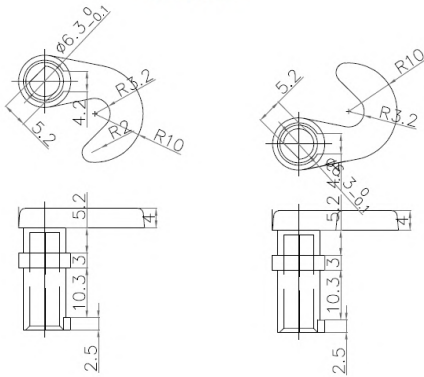

Strike Plate

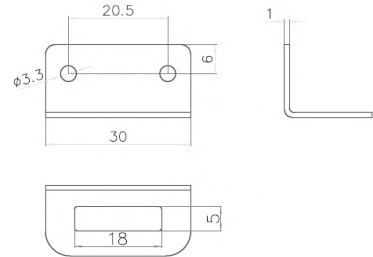


Special Order

Stock Available


**Sliding Door Lock**



**BOM Components: SLD.2D.LCK**

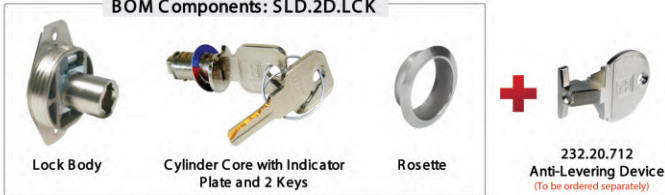

Article No.	Description
232.20.206	Sliding lock for 2 Door Sliding Fitting
232.20.712	Anti-Levering Device
232.20.207	Sliding lock for 3 Door Sliding Fitting

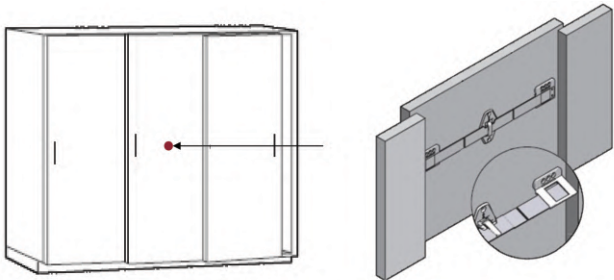

**BOM Components: SLD.3D.LCK**




Special Order

Stock Available

## Furniture Locks

Auto Latch Lock upto 20mm



Article No.	Finish
232.01.778	Zinc Nickel plated

Glass Door Lock upto 6mm



Article No.	Finish
232.01.777	Nickel plated

**Note:** Refer product communication for more details

Special Order

Stock Available

## Sliding Cabinet Locks/Catches

Automatic door catch, zinc



Article No.	Finish
245.58.754	Nickel plated

Magnetic Catch

For a panel weight of 4-5 kg.  
Version: Movable housing  
Supplied with counter piece



Article No.	Colour
246.29.105	Brown
246.29.301	Black
246.29.703	White

Magnetic double catch

For a panel weight of 6-8 kg.  
Version: Movable housing  
Supplied with counter piece



Article No.	Colour
246.84.713	White

MINI LATCH Spring catch



Article No.	Finish
245.54.701	Nickel plated

Roller Catch Screw On,  
Nylon, Plastic Catch & Stop



Article No.	Finish
243.15.704	Plastic White

Special Order


Stock Available





## Wardrobe Rail


**OVA Wardrobe rail:** Overall measurements  
Material thickness: 1.2 mm  
Finish : Steel, Chrome plated



Article No.	Dimensions (LxHxW)
<b>801.10.222</b>	2500 x 30 x 15 mm

## Wardrobe rail

Material: Aluminium  
Finish: Anodized  
Material thickness: 1.5 mm  
Size: 30 x 15 mm  
Length: 3000mm



Article No.	Finish
<b>801.33.906</b>	Anodised Silver
<b>801.76.923</b>	White Aluminium
<b>801.76.623</b>	Silver Anodised

## OVA Wardrobe rail END

**SUPPORT:** End Support for screw fixing to the side panel.




Article No.	Finish
<b>803.33.757</b>	Zinc, Nickel-plated

Special Order

## Wardrobe Rail

**Rail end support, for OVA wardrobe rail** With dowel Ø 5mm, for screw fixing into side panel – side panel bearing, plastic, grey



Article No.	Finish
<b>803.04.510</b>	Plastic, grey

## Pull-Outs

**Hanger Pull-Out:** For screw fixing beneath shelves  
Load capacity: 4 kg to 8 kg  
Finish: Steel, Nickel plated



Article No.	Length in mm
<b>805.01.752</b>	260 mm
<b>805.01.761</b>	310 mm
<b>805.01.770</b>	360 mm
<b>805.01.789</b>	410 mm

## Trouser Rack with Extension:


Steel with 10 Trouser Holders  
Plastic coated white runner cover  
Finish : Polished Chrome plated  
Size: (W x D x H)



Article No.	Dimensions (WxDxH)
<b>805.45.204</b>	465 x 505 x 100mm

## Tie Rack

Tie rack, extending, for 32 ties  
Plastic transparent/silver coloured anodised



Article No.	Finish
<b>807.21.950</b>	Transparent/silver coloured anodized

## Pull-Out Tie holder with Dispenser Tray:

For 20 Ties  
Dimensions: (W x H x D)  
500mm x 82mm x 120mm



Article No.	Finish
<b>807.21.931</b>	Aluminium / Black

## L - Bracket for top mounting



Finish : Black

Article No.	Finish
<b>806.24.391</b>	Black

Stock Available

## Tie Rack

**Tie and belt rack**, extending, for 8 belts, Plastic transparent/ silver coloured anodised



Article No.	Finish
<b>807.25.950</b>	Plastic transparent/ silver coloured anodised

**Trousers Basket: Full Extension**, Silver Grey colour,




Cabinet Width: 600mm & 900mm

Article No.	Dimensions (HxWxD)
<b>805.93.401</b>	130 x 564 x 460mm
<b>805.93.421</b>	130 x 564 x 460mm

## Wardrobe Lift

Wardrobe lift (BASIC)  
Screw fixing to the side panel.  
**Load bearing capacity:** 10 kg  
Clothes rail: Adjustable  
**For internal wardrobe width:**  
600 mm - 1200 mm (adjustable)

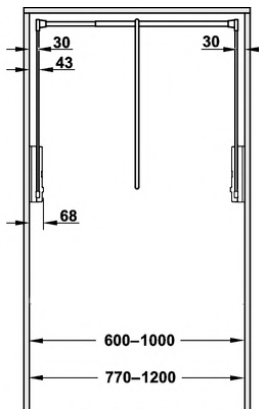

**Finish :** Chrome Plated / Black

Article No.	Wardrobe Width (internal)
<b>805.20.031</b>	600mm - 1000mm
<b>805.20.055</b>	770mm - 1200mm

## Hook

Coat Hook Aluminium  
60x30x50 mm



Article No.	Finish
<b>845.12.809</b>	Aluminium

Stainless Steel Hook,  
dia 20 mmx35 Mm




Article No.	Finish
<b>842.57.090</b>	Aluminium

Special Order

Stock Available





## Side Mounted Tie Rack



Material: Steel  
 Finish : Black  
 Weight Bearing Capacity : 10 kg.  
 Integrated Soft Closing Mechanism  
 Hanging points : 9



Article No.	Dimension (WxDxH)
<b>807.96.310</b>	168 x 444 x 85 mm



Special Order

Stock Available

## Planofit - Panel Straightening Fitting

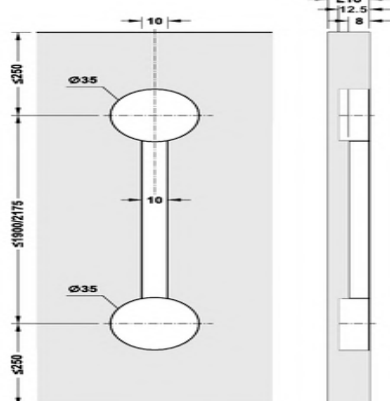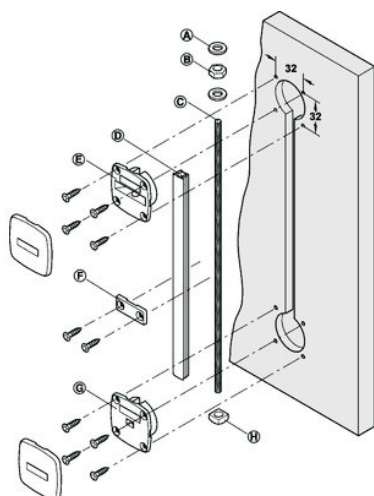

Special Order

Stock Available

## Planofit - Panel Straightening Fitting

**Accessories:** Recommended for all sliding wooden doors to prevent warping.

**PLANOFIT:** Panel Straightening fitting that prevents the panel from warping or straightens panels which have warped.

**Area of application:** Prevents doors warping in either direction or straightens doors which have become warped by 5mm

**Door height:** Max. 2,400 mm or 2,650 mm.

**Door thickness:** From 16 mm.

**Installation:** Allows retro active adjustment of the already warped panel

Set consisting of:

- 1 threaded rod
- 1 trim strip
- 2 tensioners
- 1 hexagonal nut
- 1 square nut
- 2 lock washers

**(Suitable for MDF & Particle Board only)**

Article No.	Door height
407.90.220	Straight.fitt.Planofit (door height) 2400 x (Product height) 1930 mm
407.90.221	Straight.fitt.Planofit (door height) 2650 x (Product height) 2195 mm
407.90.241	Cover cap pl.black for casing
407.90.250	Securing plate pl.black

Note: for width of door more than 600mm use 2 sets of fittings

Note: Please order 2 cover cap & 4 plastic securing plate additionally for each set

## Drawer Runners

### Ball Bearing Runner

#### Product Features:

**Material:** Mild Steel

**Weight Bearing Capacity:**

Approx. 25 Kg

**Extension:** Full extension for all sizes

**Available Sizes:** 250 to 550 mm



**Finish: Zinc Galvanized**

Article No.	Length in mm	Length in inches
420.55.900	250 mm	10 inches
420.55.901	300 mm	12 inches
420.55.902	350 mm	14 inches
420.55.903	400 mm	16 inches
420.55.904	450 mm	18 inches
420.55.904	500 mm	20 inches
420.55.906	550 mm	22 inches

**Finish: Black**

Article No.	Length in mm	Length in inches
420.55.300	250 mm	10 inches
420.55.301	300 mm	12 inches
420.55.302	350 mm	14 inches
420.55.303	400 mm	16 inches
420.55.304	450 mm	18 inches
420.55.305	500 mm	20 inches
420.55.306	550 mm	22 inches

### Drawer Runners: Ball Bearing Slides Side Mounted Full Extension.

**Load bearing capacity:** Up to 30 kg/pair

**Finish:** Zinc Galvanized, Black



**Finish: Zinc Galvanized**

Article No.	Length in mm	Length in inches
422.87.900	250 mm	10 inches
422.87.901	300 mm	12 inches
422.87.902	350 mm	14 inches
422.87.903	400 mm	16 inches
422.87.904	450 mm	18 inches
422.87.905	500 mm	20 inches
422.87.906	550 mm	22 inches

**Finish: Black**

Article No.	Length in mm	Length in inches
422.87.300	250 mm	10 inches
422.87.301	300 mm	12 inches
422.87.302	350 mm	14 inches
422.87.303	400 mm	16 inches
422.87.304	450 mm	18 inches
422.87.305	500 mm	20 inches
422.87.306	550 mm	22 inches

### Ball Bearing Slides Full Extension, Side mounted

**Features:** Runner can be disengaged using release lever, with stay closed feature for holding in closed position.

**Load bearing capacity:** Up to 45 kg/pair

**Finish:** Zinc Galvanized, Black



**Finish: Black**

Article No.	Length in mm	Length in inches
422.58.325	250 mm	10 inches
422.58.330	300 mm	12 inches
422.58.335	350 mm	14 inches
422.58.340	400 mm	16 inches
422.58.345	450 mm	18 inches
422.58.350	500 mm	20 inches
422.58.355	550 mm	22 inches
422.58.360	600 mm	24 inches
422.58.365	650 mm	26 inches
422.58.370	700 mm	28 inches

Special Order

Stock Available



## Drawer Runners

### Ball Bearing Slides Full Extension, Side mounted 45 Kg

Finish: Zinc Galvanized

Article No.	Length in mm	Length in inches
422.58.925	250 mm	10 inches
422.58.930	300 mm	12 inches
422.58.935	350 mm	14 inches
422.58.940	400 mm	16 inches
422.58.945	450 mm	18 inches
422.58.950	500 mm	20 inches
422.58.955	550 mm	22 inches
422.58.960	600 mm	24 inches
422.58.965	650 mm	26 inches
422.58.970	700 mm	28 inches

### Soft Close Ball Bearing Runner 40 Kg



Finish: Black

Article No.	Length in mm	Length in inches
432.02.131	300 mm	12 inches
432.02.132	350 mm	14 inches
432.02.133	400 mm	16 inches
432.02.134	450 mm	18 inches
432.02.135	500 mm	20 inches
432.02.136	550 mm	22 inches
432.02.137	600 mm	24 inches

Finish: zinc galvanized

Article No.	Length in mm	Length in inches
432.02.191	300 mm	12 inches
432.02.192	350 mm	14 inches
432.02.193	400 mm	16 inches
432.02.194	450 mm	18 inches
432.02.195	500 mm	20 inches
432.02.196	550 mm	22 inches
432.02.197	600 mm	24 inches

### Push to open 40 Kg

Material: Mild Steel

Weight Bearing Capacity:

upto 40kg / pair

Extension: Full extension for all sizes

Available sizes: 300 to 600mm



Finish: zinc galvanized

Article No.	Length in mm	Length in inches
422.02.061	300 mm	12 inches
422.02.062	350 mm	14 inches
422.02.063	400 mm	16 inches
422.02.064	450 mm	18 inches
422.02.065	500 mm	20 inches
422.02.066	550 mm	22 inches
422.02.067	600 mm	24 inches

Special Order

Stock Available

## Drawer Runners

### Econo Box :

Self closing drawer System slide with double stop Single extension.

**Load bearing capacity :** 25 kg.

**Finish :** Steel, Duly epoxy coated Cream RAL9001.



Article No.	Height	Length
555.93.440	54 mm	400 mm
555.93.445	54 mm	450 mm
555.94.440	86 mm	400 mm
555.94.445	86 mm	450 mm
555.94.450	86 mm	500 mm
555.95.440	118 mm	400 mm
555.95.445	118 mm	450 mm
555.95.450	118 mm	500 mm

Soft Close Mechanism for Draw Runners & Meta Box

### Area of application:

Roller runners, ball bearing runners without retainer retention, groove mounted runners, Metabox, Econobox.

### Load Bearing capacity:

25 kg load bearing capacity, with 2 sided installation

**Material:** Plastic

**Colour:** Light grey and black

**Installation:** On one or both sides, soft and self closing mechanism for screw fixing to side panel of cabinet, follower is fixed to side panel of drawer.



smuso

Article No.	Runner Length
432.13.507	For ball bearing & Soft Roller Runners
432.13.508	For Single Wall Runners (Metabox & Econobox)

Special Order

Stock Available

## Furniture Castors

**Tandema 50 twin wheel castor** with mounting plate

**Load bearing capacity:** 50 kg per castor


**Wheel Diameter:** 50 mm

**Finish:** Plastic, matt black



Without brake

With brake



Article No. Brake	Article No. Without Brake	Installation Height
660.08.321	660.07.321	63 mm


**Twin Wheel Castor**

with mounting plate but without brake

**Wheel Diameter:** 35 mm

**Load bearing capacity:** 25 kg per castor

**Finish:** Plastic, matt black



Article No.	Installation height
660.07.301	48 mm

**Swivelling castor:** Press fitted in a housing of Ø 40 mm

**Load bearing capacity:** 50 kg per castor

**Finish:** Plastic, Black

**Castor:** Hard Plastic



Article No.	Wheel Diameter
661.04.309	15 mm

**Ball Castor:** Recessed mounted

**Material:** Steel

**Finish:** Yellow Chromatized

Housing, Chrome Plated Ball



Article No.	Recess Part Ø mm
661.02.210	16 mm
661.02.230	23.5 mm
661.02.250	33 mm

**Castor:** For forward/backward running only. Preferably for bed storage pull-outs

**Load bearing capacity:** 40 kg per castor

**Finish:** Steel housing

Galvanized, white plastic wheel

**Running surface:** Hard Floors

**Wheel Diameter:** 35 mm



Article No.	Installation Height
660.98.904	41 mm

Special Order

Stock Available

## Table top swivel fitting

### Swivel Table

**Width:** max. 1200mm

**Depth:** max. 600mm

**Panel Thickness:**

**Top Panel:** ≥ 25mm

**Side Panel:** ≥ 28mm



Article No.	Size
<b>646.31.004</b>	Table top swivel fitting

Note:

Castors needs to order seperately  
661.05.320 or 661.05.330

## Furniture Glides

**Material:** Plastic

**Height:** 5 mm

**Colour:** White

**Diameter:** 19-25 mm

**Installation:** Knocking in



Article No.	Diameter in mm
<b>650.02.190</b>	19 mm

**Material:** With Intermediate  
Plastic layer, Base in grey felt

**Height:** 9 mm

**Diameter:** 20 mm

**Installation:** Screw fixing



Article No.	Diameter in mm
<b>650.20.720</b>	20 mm

**Material:** Brown Felt

**Colour:** Brown

**Installation:** Glue fixing (self  
adhesive)

### ROUND



Article No.	Diameter in mm
<b>650.06.103</b>	20 mm
<b>650.06.105</b>	24 mm

**Material:** Brown Felt

**Colour:** Brown

**Installation:** Glue fixing (self  
adhesive)

### SQUARE



Article No.	Size in mm
<b>650.06.121</b>	20 x 20 mm


Special Order

Stock Available

## Fixing Screws

Hospa Chipboard Screws,  
Countersunk Head with Full  
Threading


**Finish** : Steel, Nickel Plated  
**MOQ**: 1000 pcs



Article No.	Diameter x Length
<b>015.35.637</b>	3.5 mm x 15 mm
<b>015.35.824</b>	4.0 mm x 15 mm
<b>015.35.833</b>	4.0 mm x 17 mm
<b>015.35.842</b>	4.0 mm x 20 mm

Hospa Chipboard Screws,  
Countersunk Head with Full  
Threading


**Finish** : Steel, Galvanized  
**MOQ**: 1000 pcs



Article No.	Diameter x Length
<b>015.31.620</b>	3.5 mm x 13 mm
<b>015.31.657</b>	3.5 mm x 20 mm
<b>015.31.675</b>	3.5 mm x 25 mm
<b>015.31.684</b>	3.5 mm x 30 mm
<b>015.31.951</b>	4.5 mm x 35 mm

Hospa Chipboard Screws,  
Countersunk Head with Full  
Threading


**Finish** : Steel, Galvanized  
**MOQ**: 1000 pcs



Article No.	Diameter x Length
<b>015.31.255</b>	2.5 mm x 16 mm
<b>015.31.335</b>	3.0 mm x 15 mm
<b>015.31.540</b>	3.0 mm x 17 mm
<b>015.31.639</b>	3.5 mm x 15 mm
<b>015.31.648</b>	3.5 mm x 17 mm
<b>015.31.853</b>	4.0 mm x 25 mm
<b>015.31.871</b>	4.0 mm x 35 mm
<b>015.31.942</b>	4.5 mm x 30 mm

Hospa Chipboard Screws,  
Countersunk Head with Part  
Threading

**Finish** : Steel, Galvanized  
**MOQ**: 1000 pcs



Article No.	Diameter x Length
<b>015.41.886</b>	4.0 mm x 40 mm
<b>015.41.966</b>	4.5 mm x 40 mm

Flat Head Combination  
Cross Slot Screw

**Finish** : Steel, Galvanized  
**MOQ**: 1000 pcs




Article No.	Diameter x Length
<b>022.35.252</b>	4 mm x 25 mm
<b>022.35.305</b>	4 mm x 30 mm

Hospa Chipboard Screws,  
Countersunk Head with Part  
Threading

**Finish** : Steel, Yellow  
chromatized


**MOQ**: 1000 pcs



Article No.	Diameter x Length
<b>015.44.341</b>	6.0 mm x 50 mm

Hospa Chipboard Screws,  
Pan Head with Full Threading


**Finish**: Steel, Galvanized  
**MOQ**: 1000 pcs



Article No.	Diameter x Length
<b>015.71.633</b>	3.5 mm x 15 mm
<b>015.71.848</b>	4.0 mm x 20 mm
<b>015.71.857</b>	4.0 mm x 25 mm
<b>015.71.875</b>	4.0 mm x 35 mm
<b>015.71.884</b>	4.0 mm x 40 mm
<b>015.71.928</b>	4.5 mm x 20 mm

Hospa Chipboard Screws,  
Countersunk Head with Partly  
Threading

**Finish** : Steel, Galvanized  
**MOQ**: 5000 pcs




Article No.	Diameter x Length
<b>017.01.944</b>	4.5 mm x 30 mm
<b>017.01.971</b>	4.5 mm x 45 mm

Special Order

Stock Available

## Unitool

**Multi Drilling Jig:** For precision drilling of Minifix connectors, concealed hinges, Mounting plates, System 32 mounting panels

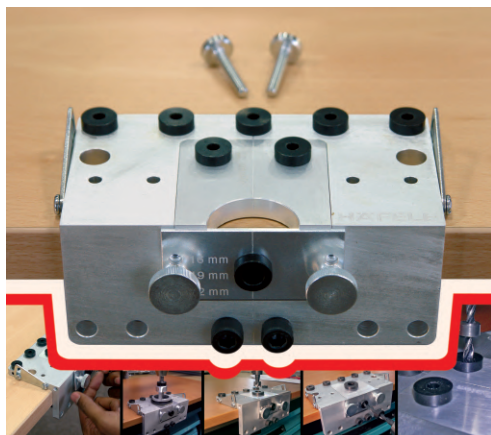

### Supplied with:

- 1 Basic jig with stop plate and drilling sleeves for Ø 5 mm drill holes
- 1 Replaceable drilling jig for System 32
- 1 Drill guide for drilling holes in edges of 16/19/22 mm
- 1 Drill guide for drilling holes in edges of 15/18 mm
- 4 Drilling sleeves Ø 8 mm
- 2 Marking pins for depth gauge
- 1 Allen key SW 2

Article No.	Description
<b>001.25.000</b>	Unitool multi drilling jig
<b>Also order</b>	
<b>001.25.031</b>	Drill guide for Ø 35mm
<b>001.25.023</b>	Drill guide for Minifix 15, d=34 mm
<b>001.28.129</b>	Depth gauge

Special Order

Stock Available





# Sliding Solutions

## Classic IF 45

PAGE 94



## Classic IF 50

PAGE 97



## Classic 50 VF SR (ST-18)

PAGE 100



## Classic 80 W

PAGE 104



## Classic 60 W Smuso

PAGE 107



## Design 80 L

PAGE 110



## Design 80 SVX

PAGE 113



## Design 80 SY

PAGE 117



## Design Ergo 80

PAGE 130





## Design Ergo 120

PAGE 124



## Design 100 C

PAGE 128




## Design 200

PAGE 131




## ECHO Sliding Door

PAGE 135



## Classic IF 45



Straight sliding system for wooden wardrobe and furniture doors.



### Hardware Specification:

- Vertical adjustment mechanism which enable adjustment up to 6 mm
- For doors within 16 and 19 mm thickness
- Rolling system with ball bearing wheels
- For single or double guide applications

**Article No.:** **405.21.100**

Sliding door kit consists of





- 2 Rollers with Bracket
- 1 Bottom Guide

**Note:** If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Special Order

Stock Available


## Classic IF 45

Product Name	Article No.		
Silver Anodized Aluminium Top Single Track (Note: Track to be ordered separately)	405.21.603	3000 mm	
Silver Anodized Aluminium Top Single Track (Note: Track to be ordered separately)	405.21.613	3000 mm	
Brake Stop (Note: Brake stop to be ordered separately)	405.21.300		

## BOM LIST


Description	Article No.
Classic IF 45 with 3m track for single door	401.29.004
Classic IF 45 with 3m track for double door	401.29.005

## Single Door

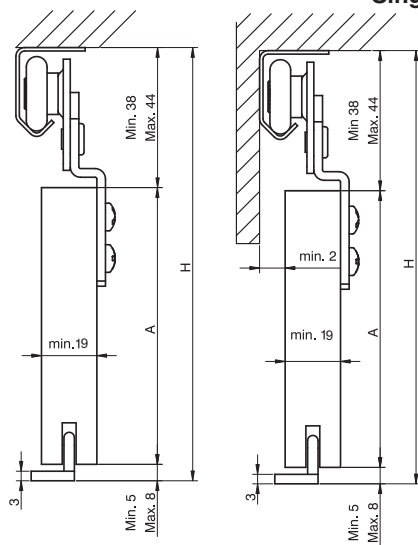


A Min. = H - 52 (max.)  
A Max. = H - 43 (min.)

## Track Dimension:



## Bottom Guide Cross Section:




Special Order


Stock Available

Classic IF 45


Double Door

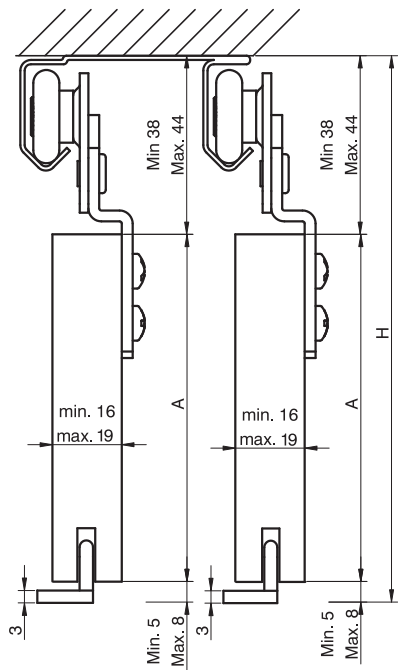

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

## Classic IF 50



Infront sliding system for wooden wardrobe and furniture doors.



### Hardware Specification:

- Bottom running rollers for smooth and effortless movement.
- The pre-drilled holes are oblong in shape to provide for adjustability and alignment of panels.
- The top and bottom (common) tracks are extruded anodized Aluminium profiles for smooth movement of the roller.
- Very easy to install and ensures running stability for bottom running sliding.

Special Order

Stock Available


## Classic IF 50

Complete accessories set for 1 door



**Article No.:** **404.24.000**

Sliding door kit consists of

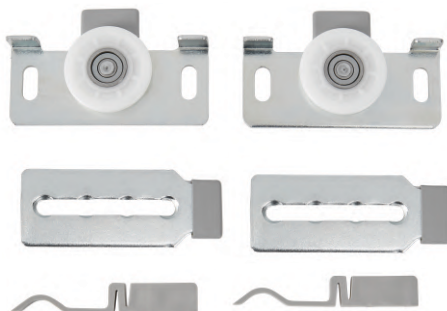- 2 Runners
- 2 Bottom Guides
- 2 End Stoppers



**Note:** If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Product Name	Article No.		
Extruded Aluminium Top Track (Note: Track to be ordered separately)	<b>404.24.901</b>	3000 mm	


Description	Article No.
<b>Cabinet width 1500 with 2 panels</b>	
Fitting Set <b>Classic IF 50 (Slide 50)</b> Kit with Extruded Aluminium Top Track for <b>2 Doors</b> 3000 mm Track - 2 Pcs. Each	<b>401.29.006</b>
<b>Consisting of</b>	
Fitting Set <b>Classic IF 50 (Slide 50)</b> Kit for <b>1 Door</b> - 2 sets	<b>404.24.000</b>
Extruded Aluminium Top Track Profile - 3000 mm- 2 Pcs.	<b>404.24.901</b>
<b>Cabinet width 2000 with 2 panels</b>	
Fitting Set <b>Classic IF 50 (Slide 50)</b> Kit with Extruded Aluminium Top Track for <b>2 Doors</b> 3000 mm Track - 3 Pcs. Each	<b>401.29.007</b>
<b>Consisting of</b>	
Fitting Set <b>Classic IF 50 (Slide 50)</b> Kit for <b>1 Door</b> - 2 sets	<b>404.24.000</b>
Extruded Aluminium Top Track Profile - 3000 mm- 3 Pcs.	<b>404.24.901</b>
<b>Cabinet width 2000 with 3 panels</b>	
Fitting Set <b>Classic IF 50 (Slide 50)</b> Kit with Extruded Aluminium Top Track for <b>3 Doors</b> 3000 mm Track - 3 Pcs. Each	<b>401.29.008</b>
<b>Consisting of</b>	
Fitting Set <b>Classic IF 50 (Slide 50)</b> Kit for <b>1 Door</b> - 3 sets	<b>404.24.000</b>
Extruded Aluminium Top Track Profile - 3000 mm- 3 Pcs.	<b>404.24.901</b>

Special Order

Stock Available

## Classic IF 50

Section: A, B, C, D, : TOP AND BOTTOM COMMON TRACK

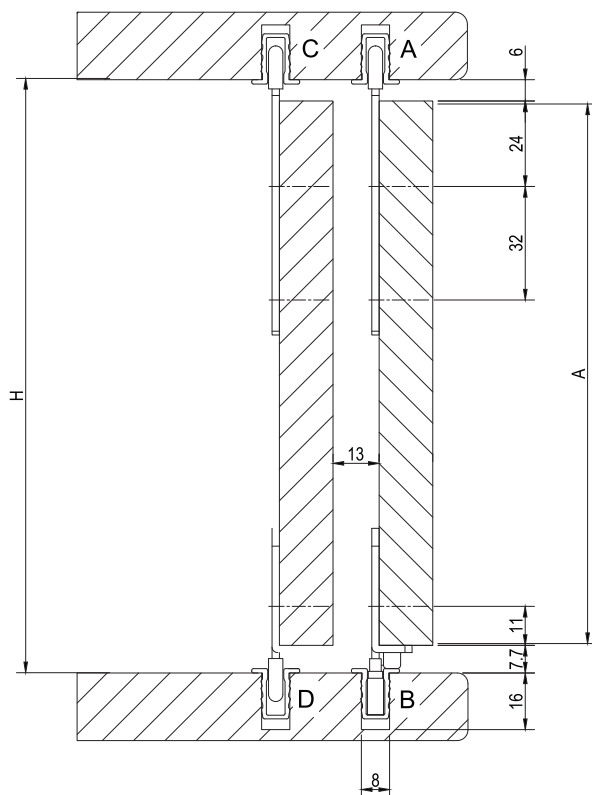

$$A = H - 13.7$$

Special Order

Stock Available

Classic 50 VF SR (ST-18)

NEW



## Hardware Specification:

- Smooth and effortless Sliding Doors.
- Easy Installation.
- Suitable for 2 door and 3 door applications

Vorfront sliding system for wooden wardrobe and furniture doors.


**Note:** If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Special Order

Stock Available




## Classic 50 VF SR (ST-18)

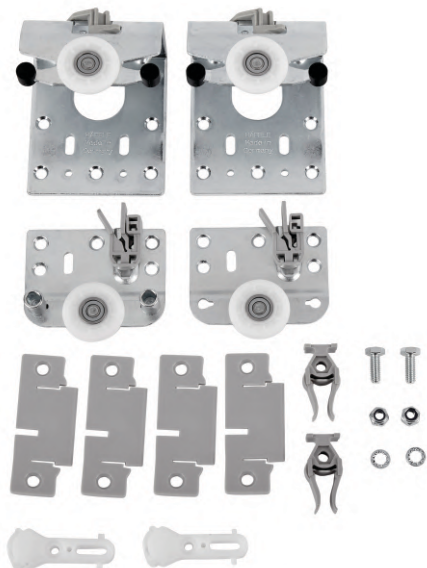**Article No.: 400.51.121\*****For 2 Doors** - Sliding door kit consists of

- 2 Top Rollers For Outer Door
- 2 Top Rollers For Inner Door
- 2 Top End Stoppers
- 2 Bottom End Stoppers
- 2 Bottom Rollers For Outer Door
- 2 Bottom Rollers For Inner Door
- 4 Clips For Rollers
- 2 Support Blocks
- Fixing Material
- Installation Manual

**Article No.: 400.51.123\*****For 3 Doors** - Sliding door kit consists of

- 2 Top Rollers For Outer Door
- 4 Top Rollers For Inner Door
- 2 Top End Stoppers
- 2 Bottom End Stoppers
- 1 Central Stopper
- 2 Bottom Rollers For Outer Door
- 4 Bottom Rollers For Inner Door
- 6 Clips For Rollers
- 2 Support Blocks
- Fixing Material
- Installation Manual

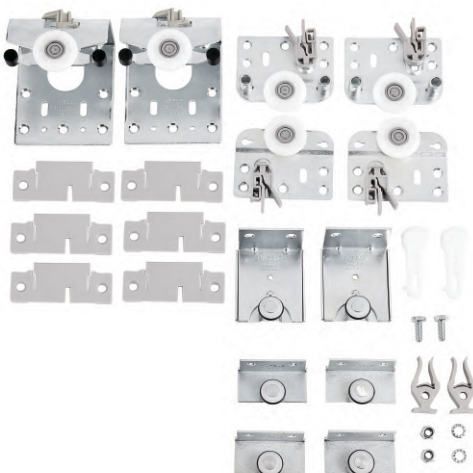




\*2 Door Alternate Article No.: 400.51.167 for 400.51.121 (Applicable soon)

\*3 Door Alternate Article No.: 400.51.168 for 400.51.123 (Applicable soon)

Special Order

Stock Available

## Classic 50 VF SR (ST-18)

Product Name	Article No.		
Silver Anodized Aluminium Top Track (Note: Track to be ordered separately)	<b>400.52.026</b>	2500 mm	
	<b>400.52.036</b>	3500 mm	
Silver Anodized Aluminium Bottom Track (Note: Track to be ordered separately)	<b>400.52.952</b>	2500 mm	
	<b>400.52.953</b>	3500 mm	

### BOM LIST

Description	Article No.
Classic 50 VF (ST-18) with 2.5 m track	<b>401.29.011</b>
Classic 50 VF (ST-18) with 3.5 m track	<b>401.29.012</b>

**For 3 Doors:** Order to be based on specifications and needs of the customer.

**NEW**

**Compatible with Classic 50 VF SR (ST-18)**



### ORDERING INFORMATION

Description	Article No.
Smuso Soft Close For 1 Door Weights Up To 50 Kg	<b>402.11.003</b>
Spacer Plate Smuso 2.0	<b>402.11.400</b>
End Stop And Activator Cap For Smuso 2.0	<b>402.11.401</b>
Bracket For Smuso 2.0 Soft Close For Inner Door	<b>405.11.225</b>
Bracket For Smuso 2.0 Soft Close For Outer Door	<b>405.11.226</b>

Special Order

Stock Available

## Classic 50 VF SR (ST-18)


### Section View:

#### Installation dimensions with roller runner

A = Door height (Calculation:  $A = IH + N + 23.5 \text{ mm}$ )

IH = Internal cabinet height + Top panel thickness




N = Cabinet base panel thickness

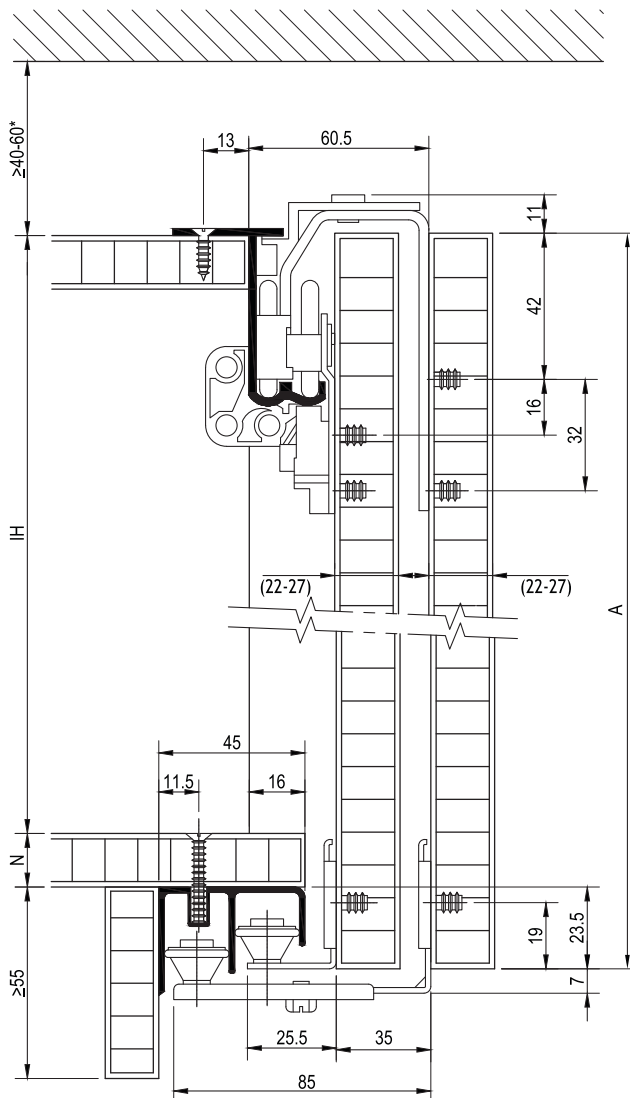

Special Order

Stock Available

## Classic 80 W



Straight sliding system for wooden doors.


### Hardware Specification:

- Ideal for dividers and internal doors
- An elegantly designed top quality system
- Concealed lower guide
- Rollers come with an elastic system for absorbing the irregularities of profile (If any)
- High quality Zamak aluminium body
- Proven smooth and silent rolling, thanks to our special anti-dust ball bearing system
- Rollers for long lasting rolling durability

Special Order

Stock Available

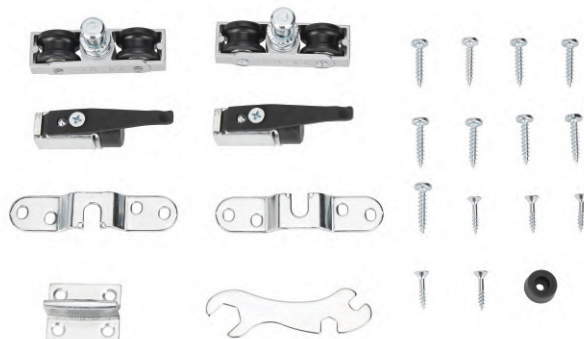


## Classic 80 W

**Article No.: 409.79.020**

Sliding door kit consists of

- 2 Rollers with Bracket
- 1 Bottom Guide
- 2 Adjustable Stoppers and other fittings

**Note:** If you place the order using the individual components (as listed below), please order the track separately. Alternately if you place the order using the BOM Articles (mentioned in the BOM LIST table), the track is included.

Product Name	Article No.		
Aluminium anodized top track	409.50.602	2100 mm	
Aluminium anodized top track	941.27.432	3000 mm	
OPTIONAL			
Product Name	Article No.	Thickness	
Mounting bracket	940.66.060	3 mm	

Special Order


Stock Available

Classic 80 W


BOM LIST

Description	Article No.
Classic 80 W with 2.1 m track	940.99.304
Classic 80 W with 3 m track	940.99.305

Section View:  
Wall Mounting

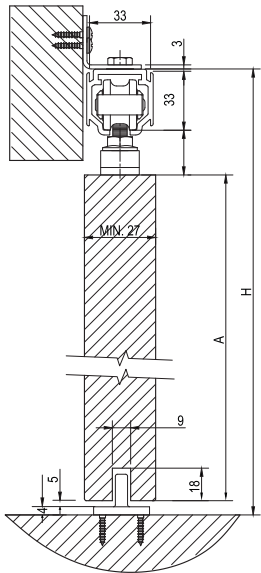


Ceiling Mounting

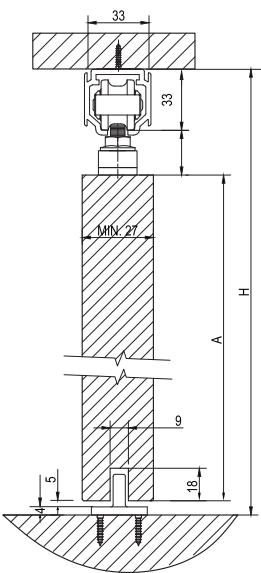


Door Height (A) = Total Height Clearance (H) - [Track Height (Non Concealed) + Desired Gap (Top+ Bottom)]

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

## Classic 60 W SMUSO

NEW



Straight sliding system with soft close for wooden doors


Special Order

Stock Available

Classic 60 W SMUSO

Hardware Specification:

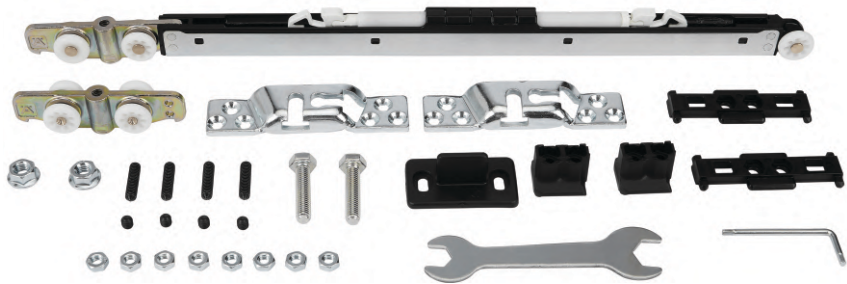


- Highly efficient Double-sided Soft Close technology embedded into the track
  - Good quality Zamak (zinc alloy) roller, hanger and carriage set body
  - Ground shielded ball bearings around the wheel for silent and smooth sliding
  - High tech two-way suspension brackets made of zinc coated steel.
- The suspension screw can be inserted from the front or the side for easy installation
- Open structure of the rail – prevents dust accumulation
  - Compact form of stopper does not afflict the roller wheels – so the wheels do not get damaged when the roller set hits the stopper
  - Adjustable bottom (up to 2 mm towards the left or right) for perfect alignment



Article No.: 941.10.026

Sliding door kit consists of:

- 2 Rollers
- 2 Adjustable Stoppers
- 1 Bottom Guide
- Two-way Suspension Brackets
- Smuso
- Fixing Accessory
- Instruction Manual


Product Name	Article No.		
Top Track	409.50.603	2000 mm	
	409.50.604	2400 mm	
	409.50.605	3000 mm	
	409.50.606	3600 mm	
OPTIONAL			
Wall Mounting bracket	940.66.060	3 mm	

Special Order


Stock Available




### Section View Wall Mounting

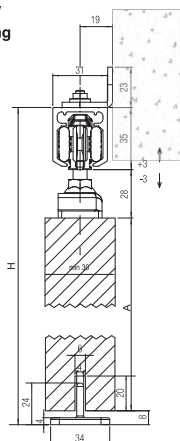


## Ceiling Mounting

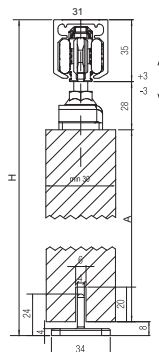
$$\text{Door Height (A)} = \text{Total Height Clearance (H)} - [\text{Track Height (Non Concealed)} + \text{Desired Gap (Top+ Bottom)}]$$


### Elevation View

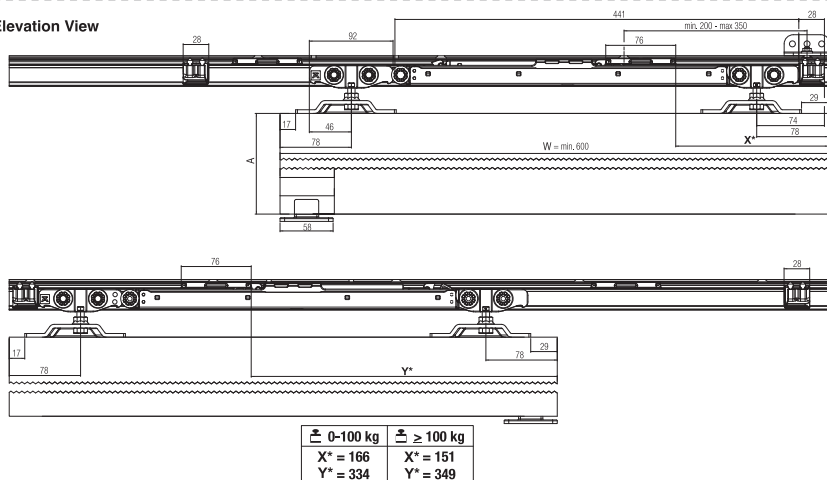

**Track Dimension:**



**Bottom Guide Cross Section:**



Stock Available

Design 80 L

NEW



Straight sliding system for glass doors.  
Track concealed in false ceiling, No glass  
preparation required.

Special Order

Stock Available

## Design 80 L

**Hardware Specification:**

- Ideal for dividers and glass doors up to 80 kg.
- False ceiling application possible.
- System applicable with a profile for false ceilings.
- 2mm minimum gap between bracket and profile.
- Elegant design.
- **No glass preparation (cut-out) required.**

**Article No.: 940.99.091**

Sliding door kit consists of:

- 2 Rollers with Bracket
- 2 Adjustable Stoppers
- 1 Bottom Guide and other fittings




Product Name	Article No.	L mm ↔	
Silver anodised aluminium double track for false ceiling application with fixed glass. (Note: Track to be ordered separately)	940.99.931	3000 mm	
Aluminium anodized top track (Note: Track to be ordered separately)	941.27.432	3000 mm	
Silver anodised aluminium track for fixed glass (Note: track to be ordered separately)	940.99.830	3000 mm	
Silver anodised aluminium trim cover (Note: trim cover to be ordered separately)	940.99.730	3000 mm	
Bottom track for fixed glass (Note: Track to be ordered separately)	943.39.815	3000 mm	
Aluminium trim cover with stainless steel finish (Note: Trim cover to be ordered separately)	940.99.731	3000 mm	
Trim cover for profile - fixed glass (Note: Trim cover for Fixed Glass to be ordered separately)	940.99.130	3000 mm	
End trim cover for glass thickness 8mm (Note: End trim cover to be ordered separately)	940.99.061	-	
End trim cover for glass thickness 10mm (Note: End trim cover to be ordered separately)	940.99.062	-	

Special Order

Stock Available

## Design 80 L


### Section View: Concealed + Fixed Glass Mounting

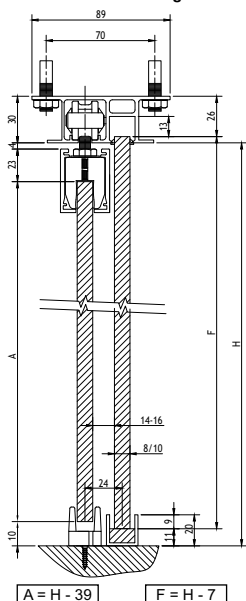


$$F = H - 7$$

F = Fixed Glass Panel Height

### Ceiling Mounting

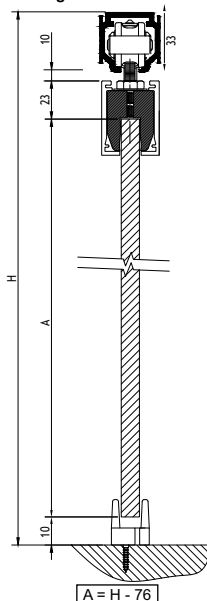


### Elevation View:

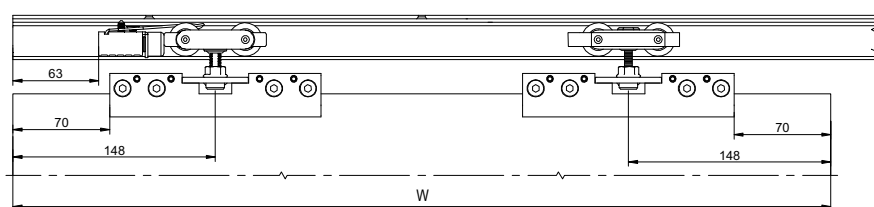


No glass preparation (cut-out) required.


### Track Dimension: Concealed + Fixed




### Ceiling Track



### Bottom Guide Cross Section:



### Bottom Track Cross Section:



Special Order

Stock Available

Design 80 SVX

NEW



Max. 80 kg



Max. 2700 mm



Max. 1500 mm



Min. 8/10 mm



Straight sliding system for glass doors.

Special Order

Stock Available

## Design 80 SVX

### Hardware Specification:










- Ideal for dividers and glass doors up to 80kg weight
- Possible to install in combination with fixed glass
- Top track can fit to fixed glass
- Top track can fit to side walls
- **No glass preparation (cut-out) required**

### Article No.: 940.99.095

Sliding door kit consists of:

- 2 Rollers with Bracket
- 2 Adjustable Stoppers
- 1 Bottom Guide



Product Name	Article No.	L mm ← →	
Silver anodized aluminium upper track (Note: Track to be ordered separately)	940.99.320	2000 mm	
	940.99.330	3000 mm	
Silver anodized aluminium upper track for fixed glass (Note: Track to be ordered separately)	940.99.321	2000 mm	
	940.99.331	3000 mm	
Silver anodized aluminium trim cover (Note: Trim cover to be ordered separately)	940.99.420	2000 mm	
	940.99.430	3000 mm	
Silver anodised aluminium trim cover for fixed glass (Note: Trim cover to be ordered separately)	940.99.421	2000 mm	
Wall glass support (Note: Wall glass support to be ordered separate)	940.99.060	-	
Trim cover (Note: Trim cover to be ordered separa)	940.99.032	-	
Trim cover for fixed glass (Note: Trim cover to be ordered separatel)	940.99.031	-	
Bottom track for fixed glass (Note: Track to be ordered separate)	943.39.815	-	
Floating support (Note: Floating support to be ordered separat)	940.99.063	-	

**Note: Available till stock last**


Special Order

Stock Available

## Design 80 SVX


## Section View:

**Application - 1**  
One Sliding Door  
Ceiling Mounting

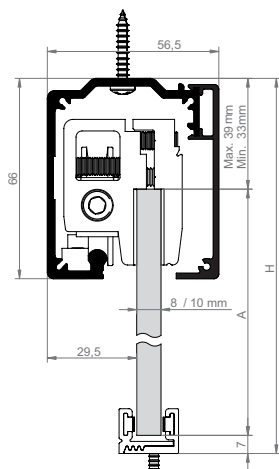

A min. = H - 46  
A max. = H - 40


**Application - 2**  
One Sliding Door + One Fixed Panel  
Ceiling Mounting

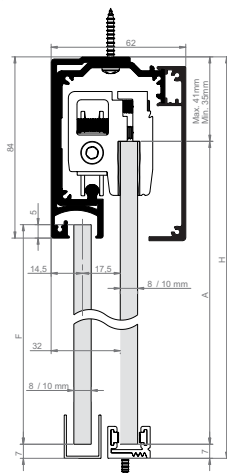

F = H - 86  
A min. = H - 48  
A max. = H - 42

F = Fixed Glass  
Panel Height


**Application - 3**  
One Sliding Door  
Wall Mounting

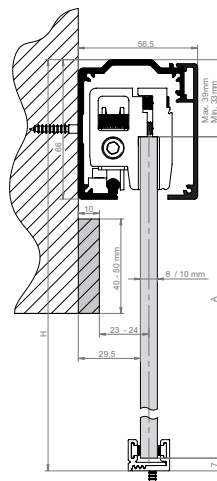

A min. = H - 46  
A max. = H - 40


**Application - 4**

**Glass Wall Mounting**  
One Sliding + One Fixed Panel Track  
Preset to Fixed Panel

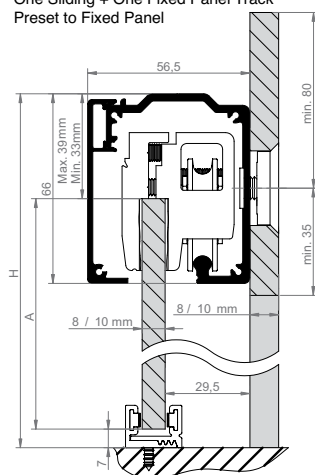


A min. = H - 46  
A max. = H - 40

## Drilling Pattern



## Cut-out Dimension




Special Order

Stock Available


## Design 80 SVX

### Application - 5


Track attach to the side walls

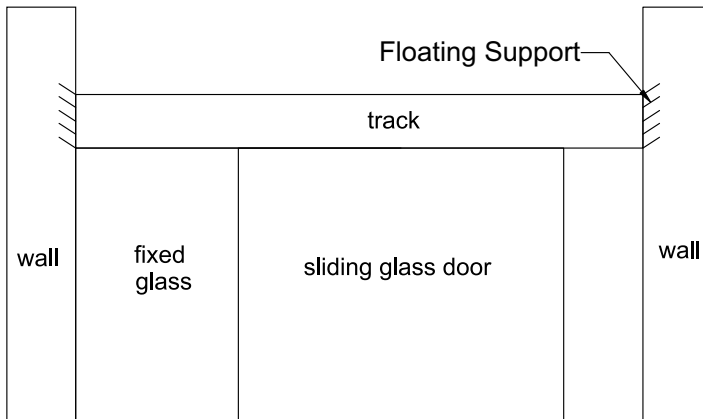

#### Track Dimension:



#### Bottom Guide Cross Section:




Special Order

Stock Available



Design 80 SY

NEW



Synchro sliding system for glass doors.  
For simultaneous opening of both the doors

Special Order

Stock Available

## Design 80 SY

### Hardware Specification:

- Ideal for dividers and glass doors up to 80kg weight
- Possible to install in combination with fixed glass
- Simultaneous opening of door is possible because of Synchro system
- **No glass preparation (cut-out) required**

### Article No.: 940.99.092 For Synchronised Door

- 4 Rollers with Bracket
- 4 Adjustable Stoppers
- 2 Pulleys
- 1 Synchro Cable & other fittings




Product Name	Article No.	L mm ← →	
Silver anodised aluminium track (Note: Track to be ordered separately)	940.99.930	3000	
Silver anodised aluminium track for fixed glass (Note: Track to be ordered separately)	940.99.830	3000	
Bottom track for fixed glass (Note: Track to be ordered separately)	943.39.815	3000	
Silver anodised aluminium trim cover (Note: Trim cover to be ordered separately)	940.99.730	-	
Aluminium separator (Note: Aluminium separator to be ordered separately)	940.99.093	-	
<b>OPTIONAL</b>			
Trim cover support	940.99.081	-	
Wall support	940.39.031	-	
Profile end trim	943.39.032	-	

Special Order


Stock Available

## Design 80 SY


Section View:

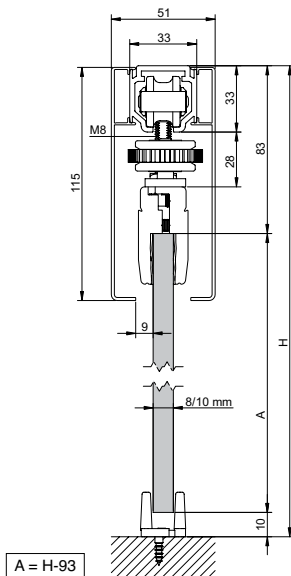


Elevation View:

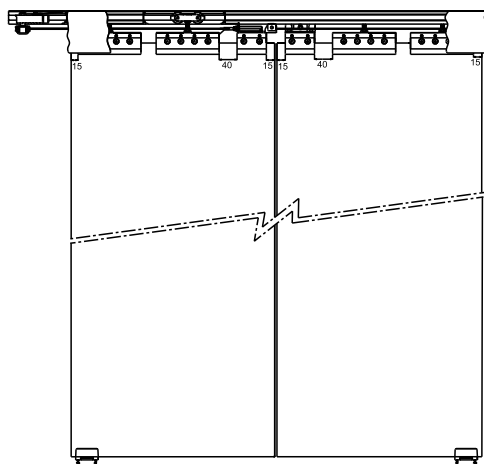

Track Dimension:



Bottom Guide Cross Section:




Special Order

Stock Available

## Design Ergo 80

NEW



Straight sliding system for glass doors.

Special Order

Stock Available

## Design Ergo 80

### Hardware Specification:

- Ideal for dividers and internal doors
- An elegantly designed top quality system
- Concealed lower guide
- Rollers come with an elastic system for absorbing the irregularities of profile (If any)
- High quality Zamak aluminium body
- Proven smooth and silent rolling, thanks to our special anti dust ball bearing system
- Rollers for long lasting rolling durability

### Glass Clamp Specification:

- Material: SS304
- Finish: Silver Polish
- Glass thickness: 10/12 mm
- Adjustable Plastic bottom guide

### Article No.: 941.10.037

Sliding door kit consists of:



- 2 Rollers
- 1 Bottom Guide
- 2 Adjustable Stoppers and other fittings
- 2 Glass Clamps
- 4 Seals



Special Order

Stock Available

Design Ergo 80

Product Name	Article No.	<div>L mm</div>	
Aluminium anodized top track	409.50.602	2100 mm	
Aluminium anodized top track	941.27.432	3000 mm	
OPTIONAL			
Product Name	Article No.	Thickness	
Mounting bracket	940.66.060	3 mm	


Special Order

Stock Available


## Design Ergo 80

### Section View:

#### Wall Mounted

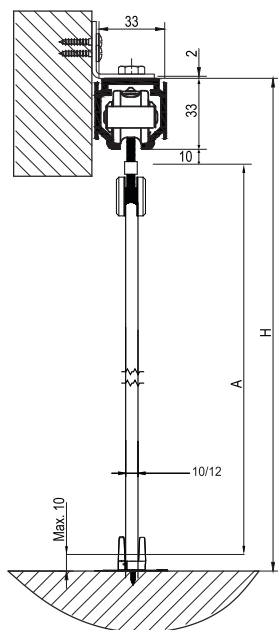


#### Ceiling Mounted

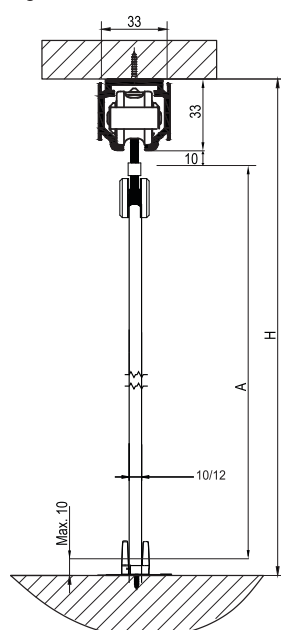


$$A = H - 53$$


### Cut-out Dimensions:

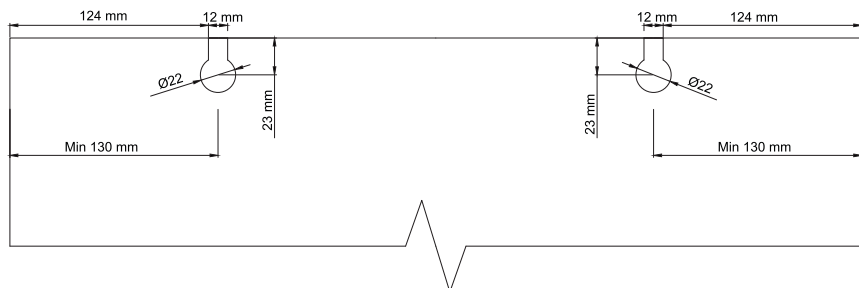

### Track Dimension:



### Bottom Guide Cross Section:



Special Order

Stock Available

## Design Ergo 120

NEW



Straight sliding system for glass doors.

Special Order

Stock Available



## Design Ergo 120

### Hardware Specification:

- Solid rollers made of high quality Zamak one piece die casting
- Ground shielded ball bearing for silent sliding
- Wheel made up of Delrin, special anti wear compound
- High tech hanger made of high quality Zamak alloy with solid structure and discrete design
- Adjustable bottom guide for perfect alignment of the door run

### Glass Clamp Specification:

- Material: SS304
- Finish: SS polish
- Glass thickness: 10/12 mm
- Adjustable plastic bottom guide

### Article No.: 941.10.038

Sliding door kit consists of:



- 2 Rollers
- 1 Bottom Guide
- 2 Adjustable Stoppers and other fittings
- 2 Glass Clamp
- 4 Seal




Special Order

Stock Available

Design Ergo 120

Product Name	Article No.		
Aluminium anodized top track	941.10.915	1524 mm	
	941.10.918	1828 mm	
	941.10.921	2134 mm	
	941.10.924	2438 mm	
Aluminium anodized top track	941.10.927	2743 mm	
	941.10.930	3048 mm	
	941.10.936	3657 mm	


OPTIONAL

Product Name	Article No.	Thickness	
Mounting bracket	940.66.060	3 mm	


Special Order

Stock Available

## Design Ergo 120

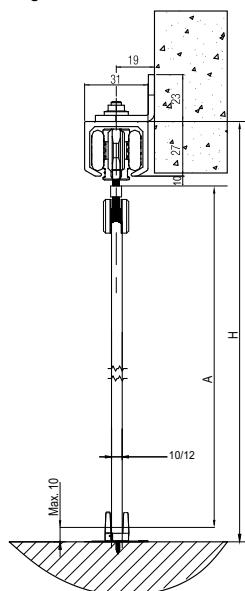
Section View:  
Wall Mounting

Ceiling Mounting

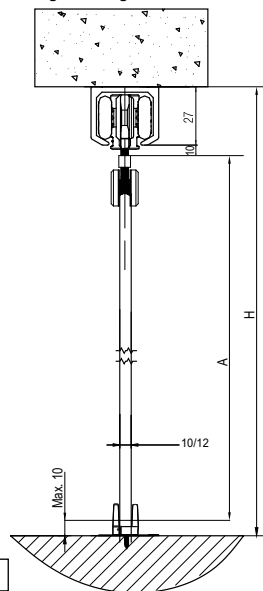


$$A = H - 47$$


Cut-out Dimensions:

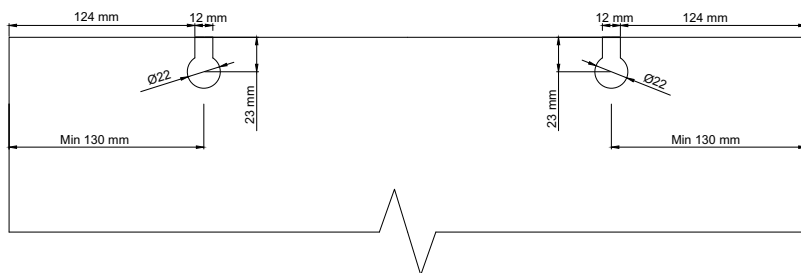

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

## Design 100 C

NEW



Straight sliding system for glass doors.










Special Order


Stock Available

## Design 100 C

**Hardware Specification:**

- System with robust and elegant hangers
- Stopper with inbuilt spring action to prevent vibration
- Roller hanger having offset shaft for adjusting door panel up and down
- Plastic roller wheels having higher anti wear performance

Product Name	Article No.	Finish	
2 Rollers	941.16.012	SS matt	
End Door Stopper	941.16.042	SS matt	
Middle Door Stopper	941.16.043	SS matt	
Glass Support for Track	941.16.031	SS matt	
Wall Support for Track	941.16.032	SS matt	
End Wall Support for Track	941.16.033	SS matt	
Universal Joint for Track	941.16.034	SS matt	
Bottom Guide for 10 or 12mm Glass	941.16.035	SS matt	
Fixing Tool	941.16.036	SS matt	

Product Name	Article No.	L mm	
Aluminium anodized running track (Note: Track to be ordered separately)	941.16.915	1500 mm	
	941.16.918	1800 mm	
	941.16.921	2100 mm	
	941.16.924	2400 mm	
	941.16.927	2700 mm	
	941.16.930	3000 mm	


**Note: Available till stock last**

Special Order


Stock Available

Design 100 C

Roller Dimension:

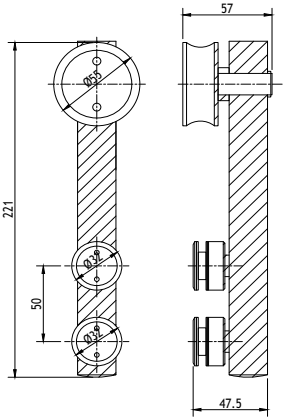


Glass Cutout:

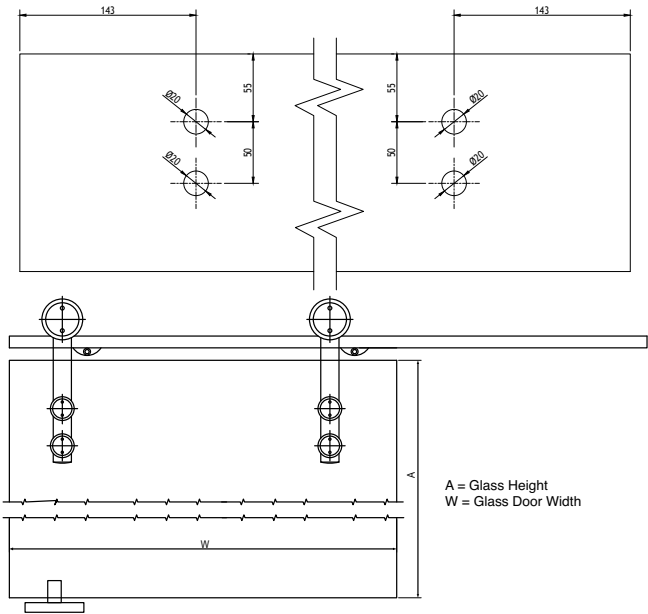


A = Glass Height  
W = Glass Door Width

Track Dimension:



Bottom Guide Cross Section:



Special Order

Stock Available

## Design 200

NEW



Straight sliding system for glass doors.

Special Order

Stock Available

Design 200

Hardware Specification:









- Installation with fixed glass is possible
- System with ball bearing rollers and adjustable stoppers
- Adjustable polyamide bottom guide to allow glass of different thickness
- **No glass preparation (cut-out) required**

Article No.: 942.63.090

Sliding door kit consists of:

- 2 Rollers with Bracket
- 2 Adjustable Stoppers
- 1 Bottom Guide



Product Name	Article No.		
Silver anodised aluminium top track for fixed glass (Note: Track to be ordered separately)	942.63.930	3000 mm	
	942.63.950	5000 mm	
Product Name	Article No.		
Silver anodised aluminium top track (Note: Track to be ordered separately)	943.39.930	3000 mm	
	943.39.945	4500 mm	
Product Name	Article No.		
Silver anodized aluminium trim cover (Note: Trim cover to be ordered separately)	942.63.830	3000 mm	
	942.63.850	5000 mm	
Product Name	Article No.		
Silver anodised aluminium bottom track (Note: Track to be ordered separately)	943.39.815	1500 mm	

Special Order


Stock Available



## Design 200


## Section View:

Wall Mounting

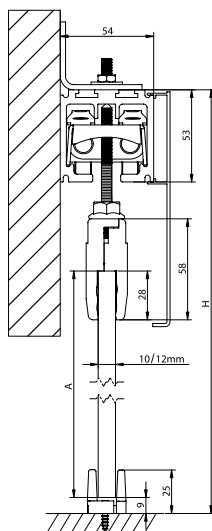


A=H-115

Ceiling Mounting

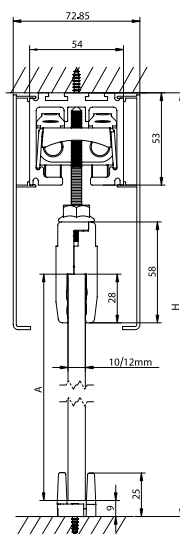

A=H-115

Wall mounting with fixed glass

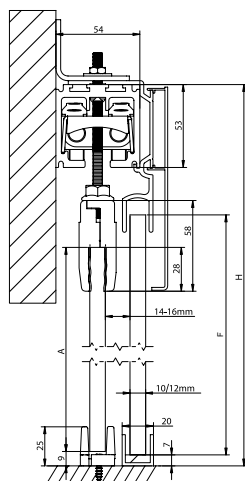


A=H-115

F=H-90

F = Fixed Glass Panel Height

Ceiling mounting with fixed glass

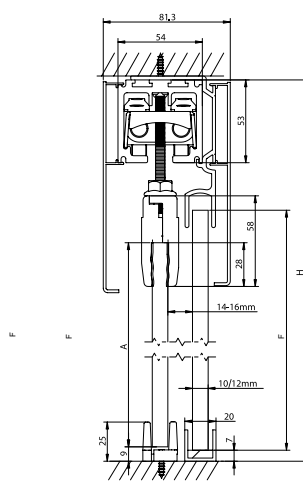

A=H-115

F=H-90


F = Fixed Glass Panel Height

Special Order


Stock Available

Design 200


Elevation View:

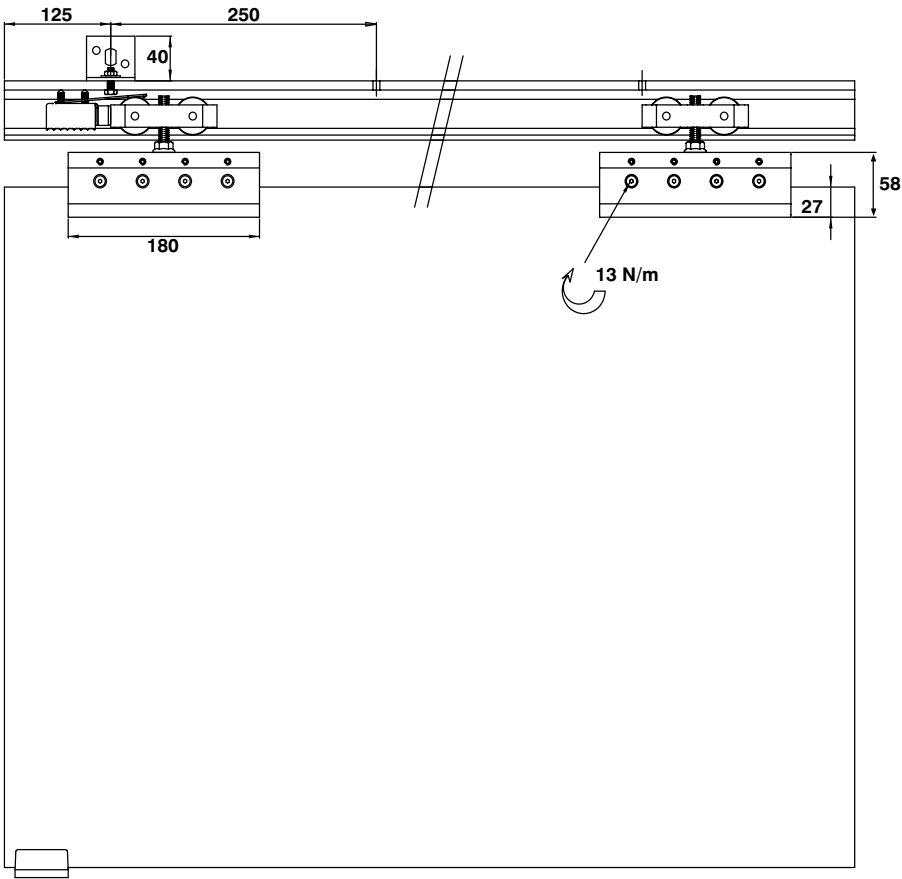

Track Dimension:





Bottom Guide Cross Section:



Special Order

Stock Available

## ECHO Sliding Door System

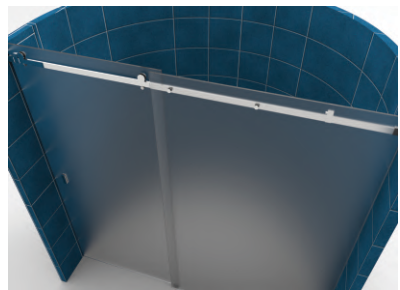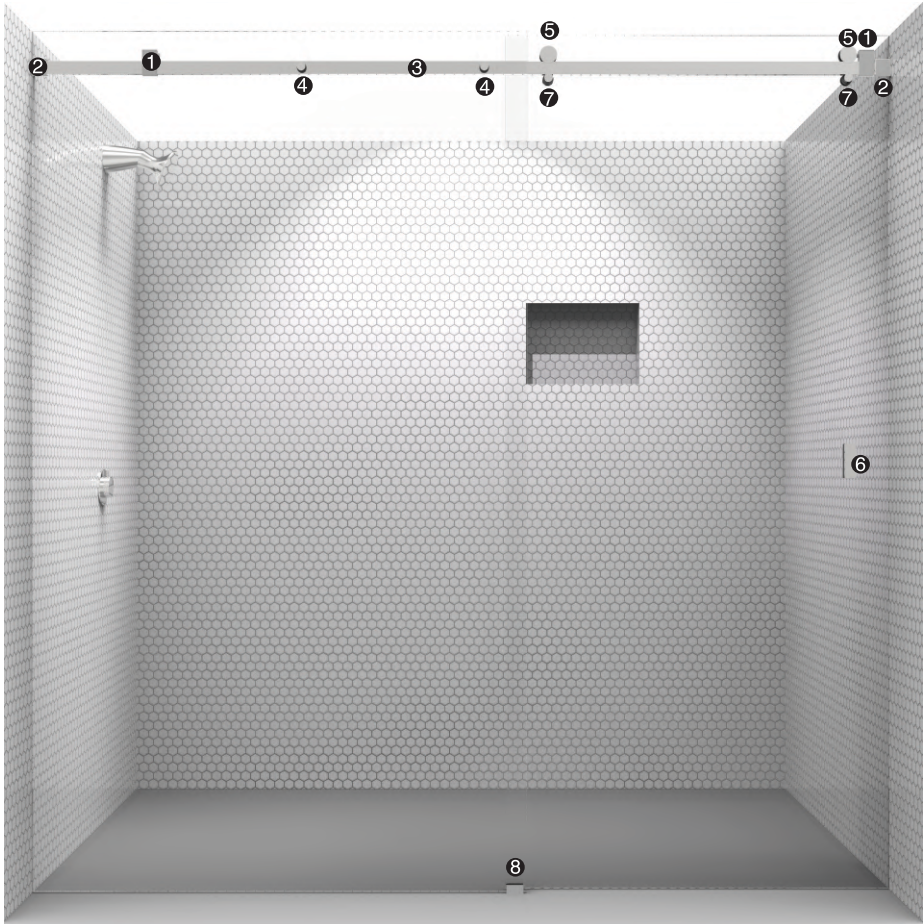


Special Order

Stock Available

## ECHO Sliding Door System

### Complete set of fittings without track

Finish	Article No.
SS Polish	981.20.314
SS Matt	981.20.315



### Door Handle

Finish	Article No.
SS Polish	981.20.302
SS Matt	981.20.309



### Roller

Finish	Article No.
SS Polish	981.20.300
SS Matt	981.20.307



### Anti-Derail

Finish	Article No.
SS Polish	981.20.301
SS Matt	981.20.308



### Track Support

Finish	Article No.
SS Polish	981.20.316
SS Matt	981.20.318

Special Order

Stock Available

## ECHO Sliding Door System



### Roller Stopper

Finish	Article No.
SS Polish	981.20.303
SS Matt	981.20.310



### Wall Support

Finish	Article No.
SS Polish	981.20.304
SS Matt	981.20.311



### Floor Guide

Finish	Article No.
SS Polish	981.20.306
SS Matt	981.20.313

### Track



Size	Finish	Article No.
30 x 2000mm	SS Polish	981.20.316
30 x 1600mm	SS Polish	981.20.317


Size	Finish	Article No.
30 x 2000mm	SS Matt	981.20.318
30 x 1600mm	SS Matt	981.20.319

Special Order


Stock Available

ECHO Sliding Door System

GLASS CUTOUT DETAILS 1.6 METER TRACK  
\* Cutout details not to scale

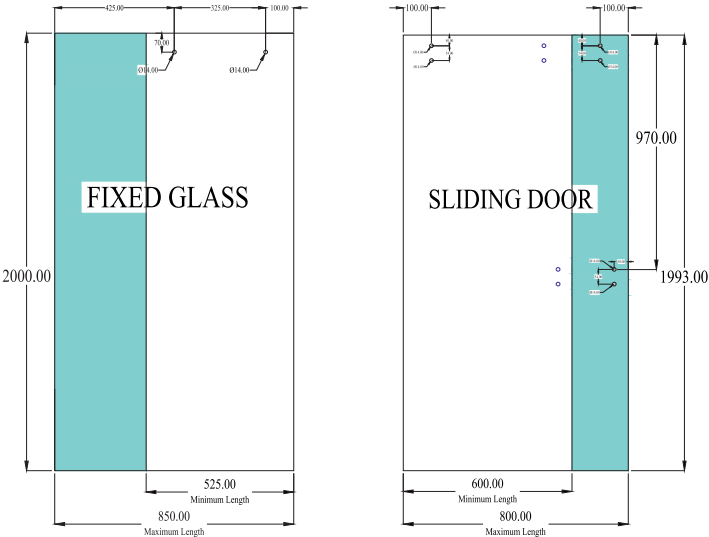

GLASS CUTOUT DETAILS 2 METER TRACK  
\* Cutout details not to scale

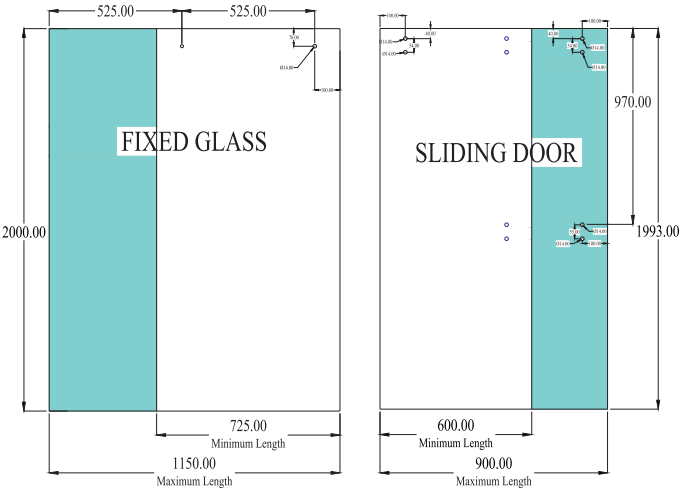

Note: The track has to be cut from the sliding end, as there is a pre drill on fixed side of the track.

Special Order

Stock Available

## ECHO Sliding Door System

### Ordering Information

Material Description	TYPE	QTY to be ordered	Article No.
Echo Shower Sliding System. 2 Rollers, 2 Anti De-rail, 2 Wall Supports, 2 Door Stop, 2 Track Supports, 1 Floor Guide & 1 Slide Pull Handle, <b>SS Polished</b>	Main Product	1	981.20.314
OR			
Echo Shower Sliding System. 2 Rollers, 2 Anti De-rail, 2 Wall Supports, 2 Door Stop, 2 Track Supports, 1 Floor Guide & 1 Slide Pull Handle, <b>SS Matt</b>	Main Product	1	981.20.315
<b>Track</b>			
Echo Rectangular Track, 30 x 2000, <b>SS Polished</b>	Track	1	981.20.316
Echo Rectangular Track, 30 x 1600, <b>SS Polished</b>	Track	1	981.20.317
OR			
Echo Rectangular Track, 30 x 2000, <b>SS Matt</b>	Track	1	981.20.318
Echo Rectangular Track, 30 x 1600, <b>SS Matt</b>	Track	1	981.20.319
<b>Additional Articles to complete the installation</b>			
<b>Connectors</b>			
Wall to Glass or Floor to Glass Bracket/ Connector, 8-12 mm, SS Polished	For fixed glass	2	981.20.231
Wall to Glass L Bracket/ Connector, 8-12 mm, SS Polished	For fixed glass	2	981.20.241
OR			
Wall to Glass or Floor to Glass Bracket/ Connector, 8-12 mm, SS Matt	For fixed glass	2	981.20.230
Wall to Glass L Bracket/ Connector, 8-12 mm, SS Matt	For fixed glass	2	981.20.240
<b>Seals (to be ordered as per glass thickness used)</b>			
Weather Seal for 8mm Glass used between Door & Side Panel opp. Hinge End, Size 2400mm	For sliding door		950.50.403
Weather Seal for 10mm Glass used between Door & Side Panel opp. Hinge End, Size 2400mm	For sliding door		950.50.404
Weather Seal for 12mm Glass used between Door & Side Panel opp. Hinge End, Size 2400mm	For sliding door		950.50.405
Sliding Door Seal For Fixed Panel, 8mm, 2400mm	Gap between fixed glass and door		950.50.406
Sliding Door Seal For Fixed Panel, 10mm, 2400mm			950.50.407
Sliding Door Seal For Fixed Panel, 12mm, 2400mm			950.50.408
<b>Spares</b>			
Echo Roller Ø 40 x 24 mm, SS Polished	Spares		981.20.300
Echo Anti De Rail 25 x 24 mm, SS Polished	Spares		981.20.301
Echo Sliding Door Handle 25 x 80 mm, SS Polished	Spares		981.20.302
Echo Sliding Roller Stopper 14 x 58 x 34 mm, SS Polished	Spares		981.20.303
Echo Sliding Wall Support 18 x 50 mm, SS Polished	Spares		981.20.304
Echo Sliding Rectangular Floor Guide 20 x 21 x 40 mm, SS Polished	Spares		981.20.305
Echo Sliding Track Support 20 x 10 mm, SS Polished	Spares		981.20.306
Echo Roller Ø 40 x 24 mm, SS Matt	Spares		981.20.307
Echo Anti Derail 25 x 24 mm, SS Matt	Spares		981.20.308
Echo Sliding Door Handle 25 x 80 mm, SS Matt	Spares		981.20.309
Echo Sliding Roller Stopper 14 x 58 x 34 mm, SS Matt	Spares		981.20.310
Echo Sliding Wall Support 18 x 50 mm, SS Matt	Spares		981.20.311
Echo Sliding Rectangular Floor Guide 20 x 21 x 40 mm, SS Matt	Spares		981.20.312
Echo Sliding Track Support 20 x 10 mm, SS Matt	Spares		981.20.313

Special Order

Stock Available





# Kitchen Fittings



## Blum TANDEM Runner

PAGE 142



## Cutlery Tray & Plate Organiser

PAGE 147



## Detergent Rack Holder

PAGE 149



## Waste Bins

PAGE 151



## Plinth Fittings

PAGE 152



## Corner Unit

PAGE 155



**Blum TANDEM concealed runners with integrated  
BLUMOTION for wooden drawers**



**Brings perfect motion to wooden drawers and pull-outs**

- Allows the rich finish of wood to be preserved in applications
- Ensures smooth running action even with heavily loaded drawers and pull-outs
- Easy to remove and clean due to its operational locking device

Special Order

Stock Available

## Blum TANDEM concealed runners with integrated BLUMOTION for wooden drawers

Article No.	Description
<b>423.53.727</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 270 mm - 30 kgs
<b>423.53.730</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 300 mm - 30 kgs
<b>423.53.735</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 350 mm - 30 kgs
<b>423.53.740</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 400 mm - 30 kgs
<b>423.53.745</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 450 mm - 30 kgs
<b>423.53.750</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 500 mm - 30 kgs
<b>423.53.755</b>	TANDEM Single extension Runners with Integrated BLUMOTION and locking device set. Nominal length: 550 mm - 30 kgs

Special Order

Stock Available

## Blum TIP-ON for TANDEM

With TIP-ON for TANDEM, the new opening feature for drawer fronts without pulling, you get drawers that open with just a light touch. This is a great addition to the smooth running action of TANDEM runners.



Article No.	Description
423.53.275	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 270 mm - 30 kgs
423.53.300	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 300 mm - 30 kgs
423.53.355	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 350 mm - 30 kgs
423.53.408	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 400 mm - 30 kgs
423.53.453	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 450 mm - 30 kgs
423.53.506	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 500 mm - 30 kgs
423.53.551	TANDEM Single extension Runners (without BLUMOTION) compatible with TIP-ON and locking device set. Nominal length: 550 mm - 30 kgs

Special Order

Stock Available

## Blum TIP-ON for TANDEM




Tandem Tip-on set




Side Stabilization kit



Front adjuster bracket



Semicircular shaft (optional for >600mm wide drawers).



Synchronisation - Pinion  
(optional for >600mm wide  
drawers) 2 per drawer

Special Order

Stock Available

## Blum TIP-ON for TANDEM



Load  
capacity  
30/50 kgs

Article No.	Description
423.53.061	TANDEM TIP -ON set for 30kg single extension runners
423.53.014	TANDEM single extension cut to size side stabilisation kit for a nominal length = 410mm and cabinet width = 1400mm
423.53.017	TANDEM single extension cut to size side stabilisation kit for a nominal length = 650mm and cabinet width = 1400mm
430.90.035	Front adjuster bracket
423.53.067	Synchronisation - Pinion
423.53.066	Semicircular Shaft

Special Order


Stock Available




## Ergo-Fit Plastic Cutlery Organisers for Tandembox

### Ergo-fit Smart


The Ergo-fit Smart cutlery organiser series grabs attention on account of its high level of convenience in providing storage space for all commonly used kitchen utensils.



Cutlery tray for 600mm



Cutlery tray for 900mm



Article No.	Description
<b>556.72.528</b>	Ergo-Fit, Smart Cutlery Tray for 600 mm Drawer, Silver Grey
<b>556.72.531</b>	Ergo-Fit, Smart Cutlery Tray for 900 mm Drawer, Silver Grey

Special Order

Stock Available



## Ergo-Fit Plastic High-Fronted Organisers for Tandembox & Legrabox



### Ergo-Fit EASYFlex

Wave goodbye to loud noises and say hello to better stability with Häfele's Ergo-fit EasyFlex Drawer Organisers. These organisers easily expand on all four sides to fit any kitchen drawer and help create multiple compartments within the drawers.

Ergo Fit -Frame Organiser

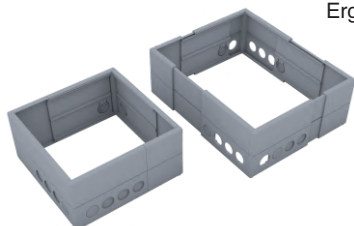

Article No.	Description
556.81.281	Ergo-Fit, Easyflex Frame Organiser, Alu Grey 237-335mm x 237-335mm x 119mm
556.81.482	Ergo-Fit, Easyflex Frame Organiser, Dark Grey 237-335mm x 237-335mm x 119mm

Special Order

Stock Available



## Detergent Rack Holder



Hafele's new pull-out and storage systems add convenience and functionality to your kitchens. The new detergent storage systems from Hafele fit snugly into your under-sink cabinets and prove to be an ideal solution for storing detergents and other cleaning agents.

### **Bottom Mounted Detergent Pull-out:**

This Detergent Pull-out is fixed on the base of the under-sink cabinet and comes with an integrated dampened self-closing technology. The mild steel wire baskets are chrome-plated and can carry weight loads up to 30 kgs. The frame and rails are grey-powder coated and perfectly complement the baskets in finish and elegance.

Special Order

Stock Available

**Detergent Rack Holder**

**Specifications:**


- Ideal for Cabinet width of 400 mm (minimum cabinet width: 300 mm)
- Load Carrying Capacity: 30 kgs
- Finish: Wire Basket: Chrome plated, Frame: Grey-powder coated

**Side Mounted Detergent Pull-out:**

An alternate option to choose is the side-mounted detergent storage baskets. These baskets can be fixed either on the left or right vertical of the under-sink cabinet with the help of fixing brackets. The mild steel wire baskets are chrome-plated and can carry weight loads up to 30 kgs. You can also choose to mount this system on runners and convert the application into a pull-out system (runners included).

**Specifications:**

- Ideal for Cabinet Width of 300 mm
- Load Carrying Capacity: 30 kgs
- Finish: Chrome plated



Bottom Mounted Detergent Rack

Article No.	Description
549.35.271	Bottom Mounted Detergent Rack for Cabinet Width of 400 mm 466 x 286 x 475

Special Order

Stock Available

## Shutter Mounted Waste Bin



### Shutter Mounted Waste Bins / Sliding Mechanism Cap

Cabinet Width: 400mm

Capacity: 13 Ltr


Mechanism: Sliding System

Dimensions: W303 x D294 x H348mm

Material: Stainless Steel

Colour of Plastic: Metallic Grey

Box Content: 12

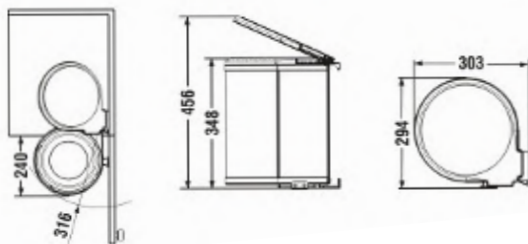

Article No.	Description
<b>503.31.002</b>	Shutter Mounted Waste Bins / Sliding Mechanism Cap

Special Order


Stock Available

## Plinth Fittings And Accessories



### Skirting Panels: Plinth Fittings Range

They are available in two heights of 100 mm and 150 mm.



Special Order

Stock Available

## Plinth Fittings And Accessories

### Skirting Panels



#### Specifications:

- Length 3000 mm
- Thickness 12 mm


Article No.	Finish
713.55.323	Dark Bronze

- Height : 100 mm

Article No.	Finish
713.57.323	Dark Bronze

- Height : 150 mm

### Adjustable Angle Connector

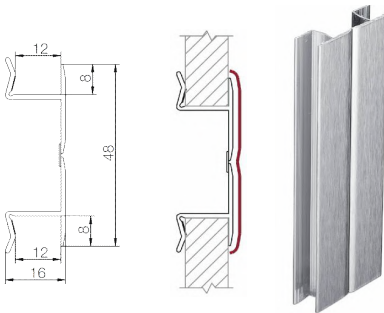

Article No.	Finish
713.55.330	Dark Bronze


- Height : 100 mm

Article No.	Finish
713.57.330	Dark Bronze

- Height : 150 mm

Special Order

### 90° Two Side Connector

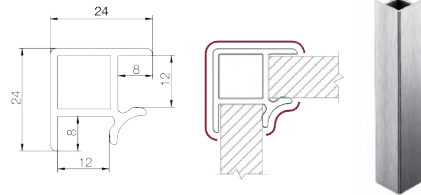

The 90° Two Side Connector (finish on both sides) joins two Skirting Panels at a standard right angle.


Article No.	Finish
713.55.360	Dark Bronze

- Height : 100 mm

Article No.	Finish
713.57.360	Dark Bronze

- Height : 150 mm

### Standard Clip







Article No.	Finish
637.87.330	Black

- Material: Metal

Stock Available

## Plinth Leg With Round Base



- Material: Thermoplastic
- Weight Bearing Capacity 200 kg / leg

Article No.	Finish
<b>637.29.751</b>	Black

- Height : 100 mm

Article No.	Finish
<b>637.29.730</b>	Black

- Height : 150 mm

Special Order

Stock Available

## Kitchen Corner Unit



### Fits exactly into every kitchen Corner Unit

A timeless design, robust technology and an unrivaled variety of shape and size options means that eco is already a classic for kitchen corners. The compact construction allows simple and precise fitting in any corner cabinet and offers a cost effective solution for symmetrical or asymmetrical layouts.

Special Order

Stock Available


## Kitchen Corner Unit




eco tray in aluminum grey



eco tray in white



Dimensions (mm)



Corner Unit trays for symmetrical and asymmetrical corner cabinets

- Optimum use of the storage space in every kitchen corner
- Easy access to the stored items thanks to extractable or revolving trays
- High load capacity thanks to solid underside ribbing
- Wide fitting range available for all established cabinet heights and different corner conditions
- Compatible with the corner cabinet system

### Finishes

- Shape: Semi circle,  $\frac{3}{4}$  circle,
- Colours: Aluminium grey, White
- Fitting: Tube fitting (incl. catch), Brake fitting (synchronously rotating trays)

Article No. White	Article No. Aluminium grey	Description	Cabinet Width
<b>541.54.860</b>	<b>541.54.360</b>	Set including 2 half trays 750 mm	900 mm
	<b>541.54.350</b>	Set including 2 half trays 686 mm	800 mm
<b>541.40.870</b>	<b>541.40.370</b>	Set including 2 trays 3/4 circle 720 mm	800 x 800 mm
<b>541.40.880</b>	<b>541.40.380</b>	Set including 2 trays 3/4 circle 820 mm	900 x 900 mm

Special Order

Stock Available





## **Mumbai Design Centre:**

Haji Moosa Patrawala Ind.(SOBO)  
Estate, Near Famous Studio,  
Mahalaxmi (West), Mumbai - 400 011  
Tel.: 022 6264 7100.

## **Mumbai Design Centre:**

#2 Filix Building, Opp. Asian Paints,  
L.B.S. Marg, Bhandup (West),  
Mumbai - 400 078  
Tel.: 022 2596 9660/  
2596 9787/2594 7305

## **New Delhi Office & Design Centre:**

D-89 , 1<sup>st</sup> Floor, Okhla Phase-I,  
New Delhi - 110 020  
Tel.: 011-66574999  
Fax: 011-41605482

## **Bangalore Office & Design Centre:**

Incubex Nestavera Spaces Pvt Ltd,  
No:13, Langford Place, Langford Road,  
Shanti Nagar, Bangalore - 560 025  
Tel.: 080 4132 6116  
Fax: 080 4132 6226

## **Bangalore**

### **Hafele Appliances Gallery:**

No. 2/1, Shiv Manor, Langford Road,  
Shantinagar, Bangalore - 560027  
Tel.: 080 - 4142 6336

## **Hyderabad Office & Design Centre:**

SJR Building - # 1-57/89/1 & 1-57/89/2  
Opp Allahabad Bank, Gachibowli,  
Hyderabad – 500032  
Tel.: 040 29557578 / 040 29557588

## **Kolkata Design Centre:**

PS PACE, Premises No. 1/1A,  
Mahendra Roy Lane, Topsia,  
Kolkata - 700 046  
Tel.: 033 40086814 / 033 40089268  
Fax: 033 24988020

## **Kolkata Office:**

Office No. 1001, PS Continental,  
10<sup>th</sup> Floor, 83/2/1 Topsia Road,  
Near Vishwakarma Building.  
South Kolkata - 700046  
Tel: 033-2285 0104 /  
033-2285 0105 / 033-2285 0106

## **Chennai Office & Design Centre:**

1<sup>st</sup> Floor No.24, College Road,  
Nungambakkam, Chennai - 600 006  
Tel.: 044 - 4215 1542  
Fax: 044 2446 0922

## **Pune Design Centre:**

Showroom No. 2, Ground Floor,  
F P no. 403, A/2, ICC Trade Tower,  
Senapati Bapat Marg,  
Shivaji Nagar, Pune -411016  
Tel.: 020 2563 3301  
Fax: 020 2563 3302

## **Pune Office:**

Office No. 12, Vastushree Complex,  
Survey No.587,  
Near Hyde Park, Gultekdi,  
Market Yard, Pune - 411 037  
Tel.: 020 2426 6264  
Fax: 020 2426 6274

## **Ahmedabad Office:**

Hafele India Pvt. Ltd., Office No. 302,  
3<sup>rd</sup> Floor, Shangrila Arcade, Near  
Shyamal Cross Road, Satellite,  
Ahmedabad - 380015  
Tel.: +91 79695 55505 / 8866220505

## **Cochin Office:**

Jomer Symphony, 5<sup>th</sup> Floor, 48/1744  
C34, Chalikkavattom, North Ponnuranni,  
Vyttila, Cochin- 682010

## **Sri Lanka:**

### **Hafele Office and Design Centre:**

52, Nandana Gardens  
(On Duplication Road), Colombo 04.  
Tel: +94 112 500 501.  
Fax: 0094 112 500 553.

## **Hafele Design Centre:**

448, Galle Road, Rawathawatta,  
Moratuwa, Sri Lanka.  
Tel.: +94 112 644 600.

## **Hafele Boutique:**

747A, Sirimawo Bandaranayaka  
Mawatha, Mulgampola,  
Kandy, Sri Lanka.  
Tel.: +94 812 223 338.

## **Bangladesh Office:**

2<sup>nd</sup> Floor, House - 181, Road - 2,  
Mohakhali DOHS, Dhaka - 1206.  
Tel.: 01844018431/ 01844018432/  
01844018433/ 01844018437.

## **Bangladesh Design Center:**

House - 106, Road - 12,  
Block - E, Banani, Dhaka - 1213  
Tel.: 02-48810380-81

## **Nepal:**

UHS Holdings Pvt. Ltd.  
Kathmandu-2,  
Gairidhara Chowk, Nepal.  
Mob.: +977 9802338800

## **Bhutan:**

Smart Homes  
Gr. Floor, Druk Building (Opp Helipad)  
Babesa -Thimpu Expressway, Thimpu  
Tel.: +975-2-333419  
Mob.: +975-77277615, 17839717,  
77114228,1760063,17669840



**Mumbai Corporate Office:**

Office No. 3, Building "A", BETA,  
I Think Techno Campus, Off J.V.L.R,  
Opp. Kanjurmarg East, Mumbai – 400 042.  
Tel.: 022 6142 6100 | Fax: 022 6702 0531.

**For Enquiries SMS "HAFELE" to 56070**

Toll Free Customer Care: 1800 266 6667  
Customer Care WhatsApp: +91 97691 11122  
customer@hafeleindia.com  
info@hafeleindia.com

Follow us on

