


NEW SIZES

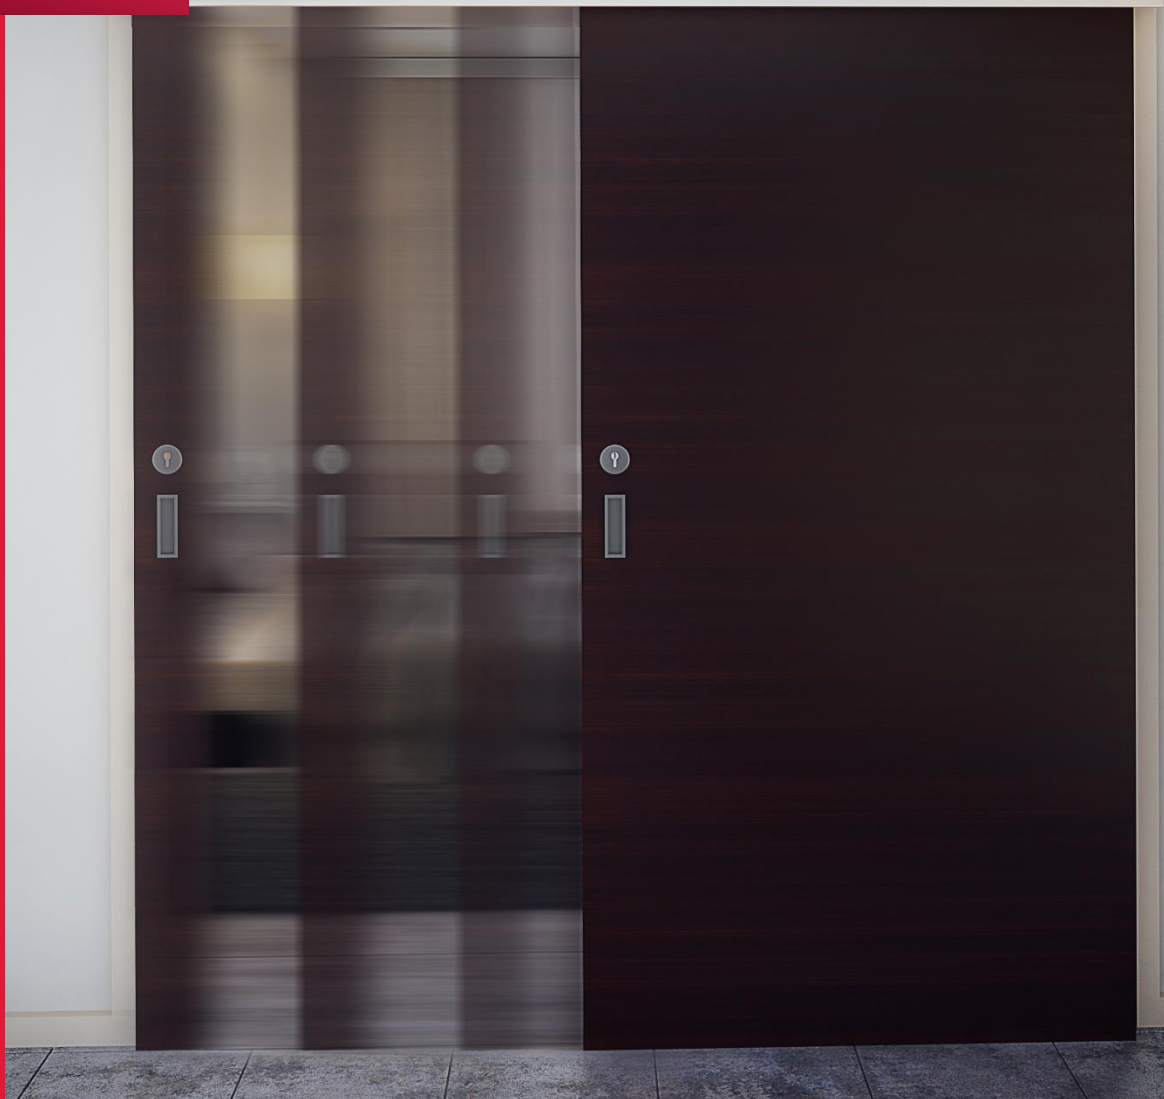

DOUBLE-SIDED SMUSO
CLASSIC 100 W & 100 XL

Häfele houses a comprehensive range of Sliding Systems under its SLIDO brand for every imaginable indoor or outdoor application. These solutions not only add emphasis to your interiors but also serve as a lavish gateway to the world outside. They offer unconditional access and optimal functionality coupled with distinctive designs and the latest technologies.

While our range holds the potential to holistically meet your sliding door needs for varying applications, door materials and weight requirements, we also work incessantly to better the feature packages that we offer to you through our range.



As an extension of this promise, Häfele presents **CLASSIC 100 W and CLASSIC 100 XL** straight sliding systems for wooden doors with **DOUBLE-SIDED SMUSO (SOFT CLOSE)**. Besides durability and versatility, these systems now offer seamless transitions like never before. Whether the door is opened or closed with force, the new soft close mechanism gently reduces the intensity of the action and then smoothly draws the door to its final stop in either directions.

This product communication introduces you to **two new sizes launched under the Classic 100 W and Classic 100 XL Systems** and takes you through the following details:


Topic	Page No.
CLASSIC 100 W – Product & Technical Specifications	3 - 4
CLASSIC 100 XL – Product & Technical Specifications	5 - 6
COMPETITION ANALYSIS & ORDERING INFORMATION	7



» CLASSIC 100 W

with Double-Sided Smuso


- Top-hung system
- Straight sliding application
- For wooden doors
- For internal doors
- No bottom track

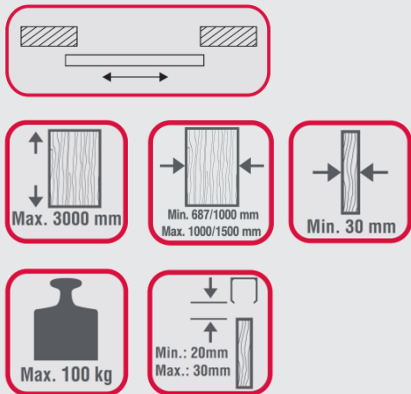




- Highly efficient Double-sided Soft Close technology embedded into the track
- Good quality Zamak (zinc alloy) roller, hanger and carriage set body
- Ground shielded ball bearings around the wheel for silent and smooth sliding
- Wheels made of DELRIN – a special anti-wear compound that offers higher tensile strength, stiffness, resistance, and significantly outperforms on impact resistance
- High tech two-way suspension brackets made of zinc coated steel. The suspension screw can be inserted from the front or the side for easy installation
- Open structure of the rail – prevents dust accumulation
- Compact form of stopper does not afflict the roller wheels – so the wheels do not get damaged when the roller set hits the stopper
- Adjustable bottom (up to 2 mm towards the left or right) for perfect alignment

» CLASSIC 100 W - with Double-Sided Smuso

Installation Possibilities

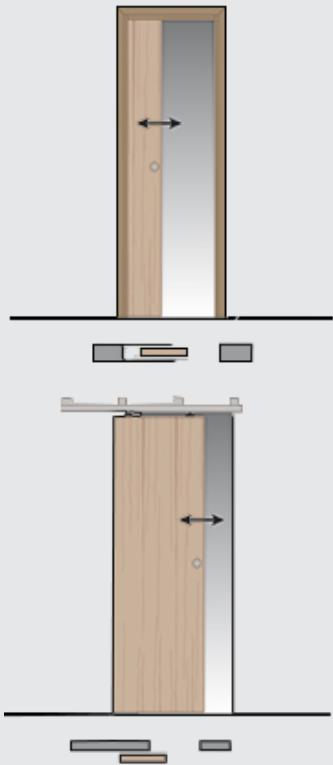


Technical Specifications

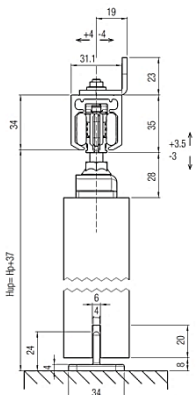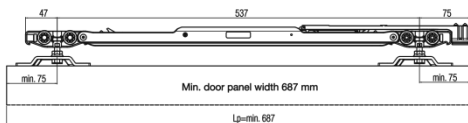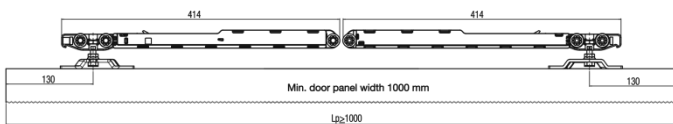

Hup = Height Passage Opening
 Lp = Door Leaf Width
 Hp = Door Leaf Height

Components


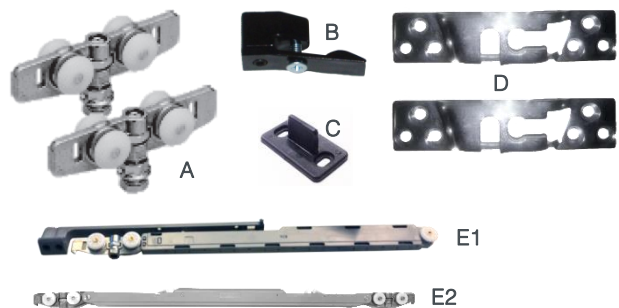


A	Rollers
B	Adjustable Stopper
C	Bottom Guide
D	Two-way Suspension Brackets
E1	Double-Sided Smuso Track for system with min. door width 1000mm and max. door width 1500 mm
E2	Double-Sided Smuso Track for system with min. door width 687mm and max. door width 1000 mm [NEW]
F	Fixing Accessories
G	Instruction Manual

» CLASSIC 100 XL

with Double-Sided Smuso

- Top-hung system
- Straight flush sliding application
- For wooden doors
- For internal doors
- No bottom track





smuso
...soft & silent


- Highly efficient Double-sided Soft Close technology embedded into the track
- Good quality Zamak (zinc alloy) roller, hanger and carriage set body
- Ground shielded ball bearings around the wheel for silent and smooth sliding
- Wheels made of DELRIN – a special anti-wear compound that offers higher tensile strength, stiffness, resistance, and significantly outperforms on impact resistance
- Brackets are flushed into the door, reducing the gap between track and door to 3mm
- Open structure of the rail – prevents dust accumulation
- Compact form of stopper does not afflict the roller wheels – so the wheels do not get damaged when the roller set hits the stopper
- Adjustable bottom (up to 2 mm towards the left or right) for perfect alignment

» CLASSIC 100 XL - with Double-Sided Smuso



Installation Possibilities

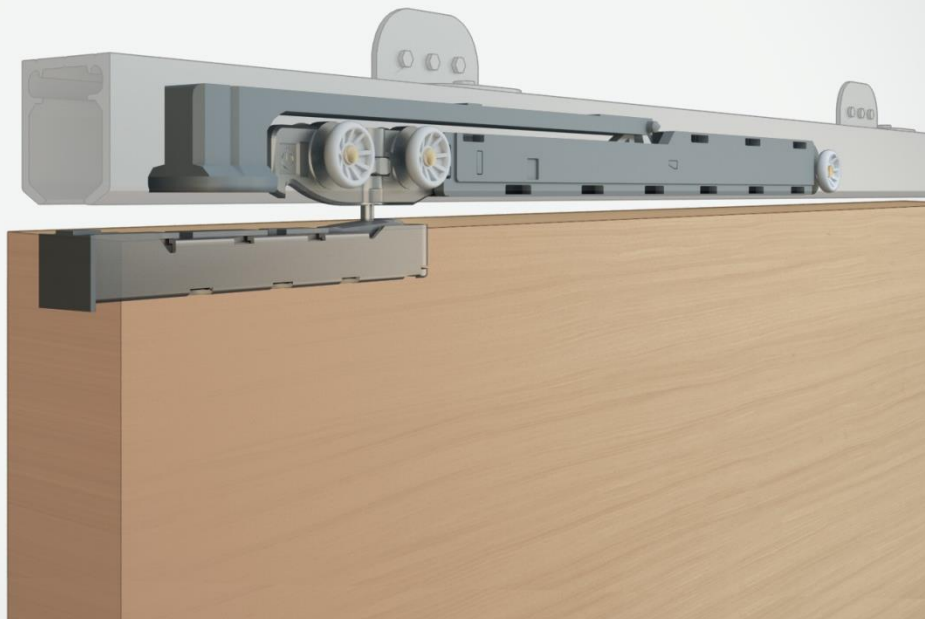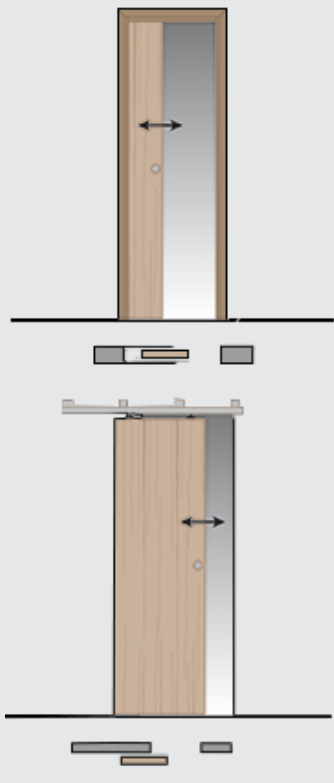

Technical Specifications

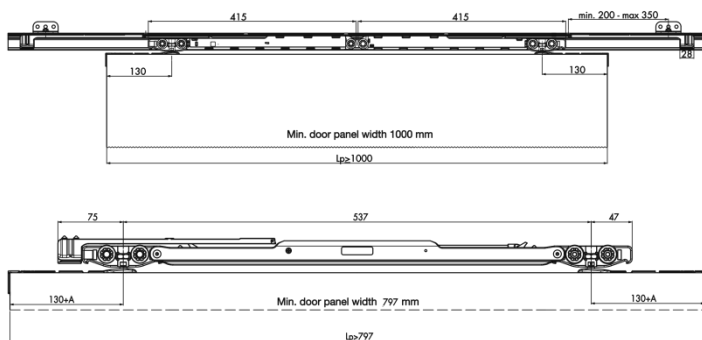


A=[$lp-797$]/2

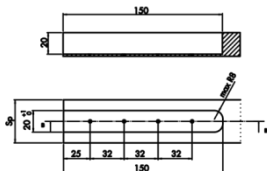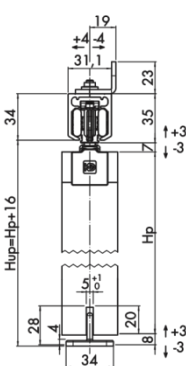


Hup = Height Passage Opening
 Lp = Door Leaf Width
 Hp = Door Leaf Height

Components

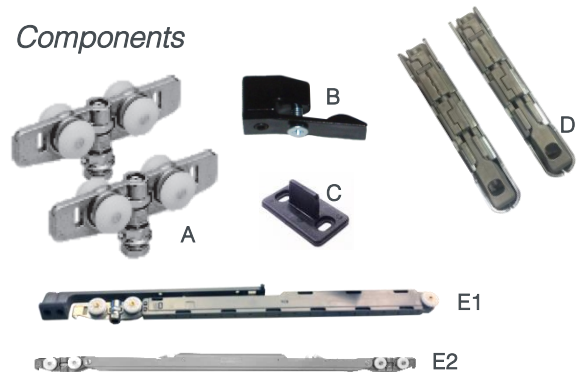

A	Rollers
B	Adjustable Stopper
C	Bottom Guide
D	Concealed Brackets
E1	Double-Sided Smuso Track for system with min. door width 1000mm and max. door width 1500 mm
E2	Double-Sided Smuso Track for system with min. door width 797mm and max. door width 1000 mm [NEW]
F	Fixing Accessories
G	Instruction Manual

Adjustments

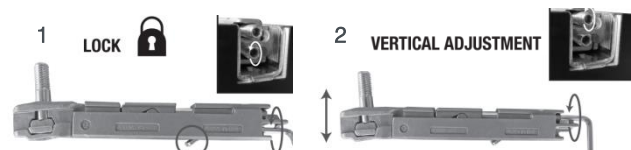

» ORDERING INFORMATION – *Classic 100 W and 100 XL*

Article Numbers for Classic 100 W and 100 XL systems with minimum door width of 687 and 797 mm respectively and a maximum door width of 1000 mm

Article No.	Description	MRP (INR)
941.10.013	Classic 100 W with Double-Sided Smuso [NEW] - Min. Width 687 and Max. Width 1000 mm	10,850
941.10.012	Classic 100 XL with Double-Sided Smuso [NEW] - Min. Width 797 and Max. Width 1000 mm	20,150

Note: The track article numbers remain the same for the new systems as the existing ones, i.e. article number for 2m track is 941.10.92010, for 2.4m is 941.10.92410 and 3m is 941.10.93010.

BOM articles for Classic 100 W and 100 XL systems with minimum door width of 1000 mm and maximum door width of 1500 mm

BOM Article No.	Description	MRP (INR)
941.10.00710	Classic 100 W with Double-Sided Smuso and 2 Meter Track	13,521
<i>consisting of</i>		
941.10.007	Classic 100 W with Double-Sided Soft Close - Min. Width 1000 and Max. Width 1500 mm	10,850
941.10.92010	2 Meter Track	2,671
941.10.00711	Classic 100 W with Double-Sided Smuso and 2.4 Meter Track	13,819
<i>consisting of</i>		
941.10.007	Classic 100 W with Double-Sided Soft Close - Min. Width 1000 and Max. Width 1500 mm	10,850
941.10.92410	2.4 Meter Track	2,969
941.10.00712	Classic 100 W with Double-Sided Smuso and 3 Meter Track	13,959
<i>consisting of</i>		
941.10.007	Classic 100 W with Double-Sided Soft Close - Min. Width 1000 and Max. Width 1500 mm	10,850
941.10.93010	3 Meter Track	3,109
941.10.00810	Classic 100 XL with Double-Sided Smuso and 2 Meter Track	22,821
<i>consisting of</i>		
941.10.008	Classic 100 XL with Double-Sided Soft Close - Min. Width 1000 and Max. Width 1500 mm	20,150
941.10.92010	2 Meter Track	2,671
941.10.00811	Classic 100 XL with Double-Sided Smuso and 2.4 Meter Track	23,119
<i>consisting of</i>		
941.10.008	Classic 100 XL with Double-Sided Soft Close - Min. Width 1000 and Max. Width 1500 mm	20,150
941.10.92410	2.4 Meter Track	2,969
941.10.00812	Classic 100 XL with Double-Sided Smuso and 3 Meter Track	23,259
<i>consisting of</i>		
941.10.008	Classic 100 XL with Double-Sided Soft Close - Min. Width 1000 and Max. Width 1500 mm	20,150
941.10.93010	3 Meter Track	3,109

HÄFELE

Häfele India Private Limited | Office No. 3, Building "A", BETA, I Think Techno Campus, Off J.V.L.R, Opp. Kanjurmarg East, Mumbai – 400 042. | Tel.: 022 6142 6100 | Fax: 022 6702 0531

New Delhi | Kolkata | Chennai | Hyderabad | Bangalore | Pune | Ahmedabad | Srilanka | Bangladesh | Nepal | Bhutan

Toll Free Customer Care No.:1800 266 6667, Red Carpet Helpline for Franchisees:4545 | SMS HAFELE to 56070 | customercare@hafeleindia.com

www.hafeleindia.com