


## DCL-30 CONCEALED DOOR CLOSER

For smooth closing of your doors, Häfele introduces the new DCL-30 Concealed Door Closer. This door closer is made of high quality Aluminium for exceptional durability and is tested for 5,00,000 cycles ensuring long operational performance. It can be installed on wooden or metal framed doors, in the door or door frame and with DIN left or DIN right opening! The door closer comes with a maximum opening angle of 120° and a hold open function at 90°. The closing and latching speeds of the door can be adjusted with the different adjustment screws in the door closer.




## PRIMARY COMPONENTS

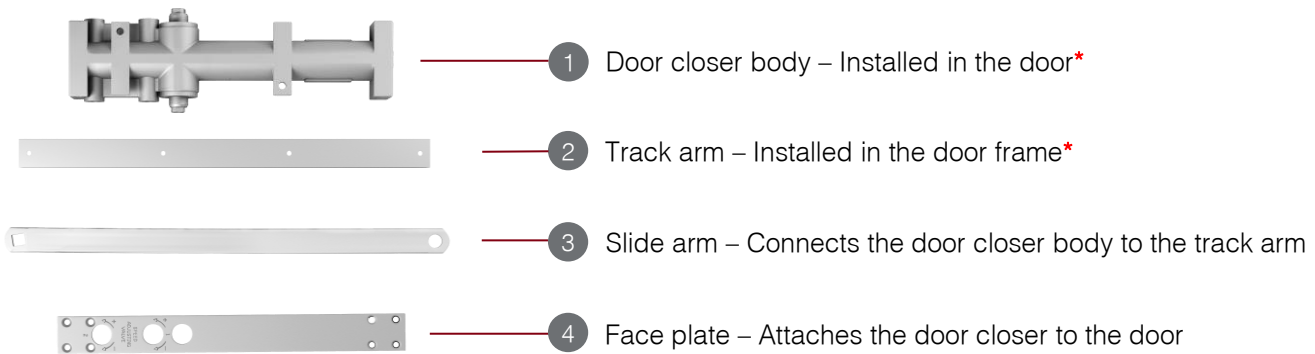


\*In Transom mount, the door closer body is installed inside the door frame and the track arm is installed in the door

## TECHNICAL SPECIFICATIONS



### 1. Door Closer Body

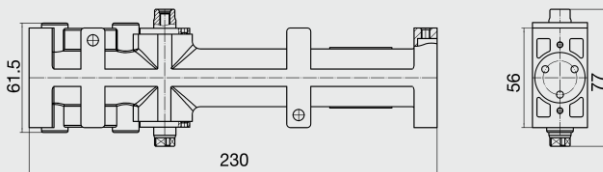

### 2. Track Arm

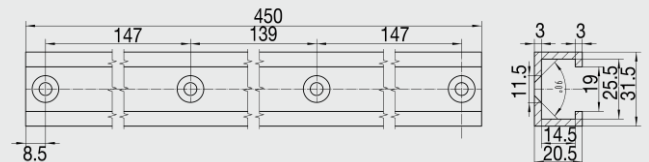

### 3. Face Plate

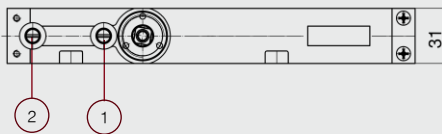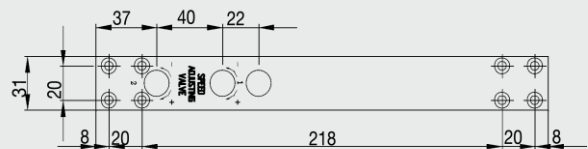

1 – Closing speed adjustment  
2 – Latching speed adjustment

## PRODUCT SPECIFICATIONS

Product	DCL-30 Concealed Door Closer
Article No.	931.84.921
Door weight	Max. 80 kg.
Door width	950-1100 mm
Door thickness	Min. 40 mm
Closing force	EN 4
Material and Finish	Aluminium
Opening angle	Max. 120°
Hold open angle	90°
Closing and latching speeds	Adjustable Closing speed: 120° - 15° Latching speed: 15° - 0°
Application	Wooden and Metal-framed doors
Compatible	DIN left and right
Installation	Door and Transom mount
Cycle testing	5,00,000 cycles
MRP	6,120/-

Häfele India Private Limited | Office No. 3, Building "A", BETA, I Think Techno Campus, Off J.V.L.R, Opp. Kanjurmarg East, Mumbai – 400 042. | Tel.: 022 6142 6100 | Fax: 022 6702 0531

New Delhi | Kolkata | Chennai | Hyderabad | Bangalore | Pune | Ahmedabad | Srilanka | Bangladesh | Nepal | Bhutan

Toll Free Customer Care No.: 1800 266 6667 | SMS HAFELE to 56070 | [customercare@hafeleindia.com](mailto:customercare@hafeleindia.com) | [www.hafeleindia.com](http://www.hafeleindia.com)